
4-14. Explanation of MENU-NETWORK (Additional feature)

This feature is supported by MPU version:1.2*, FPGA version:0.6* or later.

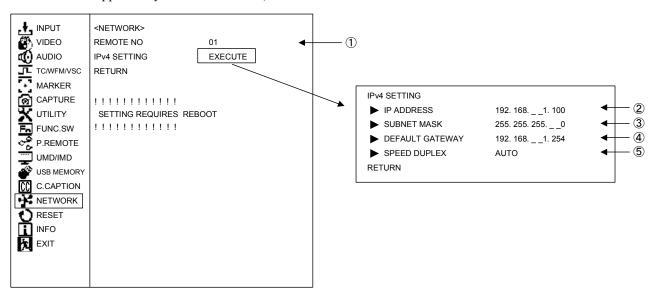

1 REMOTE NUMBER

Set the ID number within the range from 01 to 99 when remote control is performed on a network.

· Default setting is 01.

② IP ADDRESS

- $\boldsymbol{\cdot}$ Set the IP ADDRESS.
- Setting range: $0 \sim 255$. $0 \sim 255$. $0 \sim 255$. $1 \sim 254$

3 SUBNET MASK

- Set the SUBNET MASK.
- Setting range: $0 \sim 255$. $0 \sim 255$. $0 \sim 255$. $0 \sim 255$

4 DEFAULT GATEWAY

- Set the DEFAULT GATEWAY.
- Setting range: $0 \sim 255$. $0 \sim 255$. $0 \sim 255$. $0 \sim 255$

(5) SPEED DUPLEX

· Set the transmission speed and method.


Setting	Speed and method	
AUTO	Automatic negotiation	
100M FULL	100Mbps full-duplex	
100M HALF	100Mbps half duplex	
10M FULL	10Mbps full duplex	
10M HALF	10Mbps half duplex	

• Default setting is AUTO.

Notice: When the settings of $2\sim$ are changed, this monitor should be rebooted. (After reboot, the changed setting will be effective.)

Explanation of additional function C.CAPTION

It is possible to decode the Closed Caption signal embedded to the SDI signal and to display that on the screen. This function is supported by MPU version:1.2*, FPGA version:0.6* or later.



1 Closed Caption ON/OFF Setting

- · Setting ON/OFF for Closed Caption.
- · Default setting is OFF.
- Closed Caption is not displayed while menu, mouse menu or preset is opened or when any input signals except SDI are selected.

2 Setting type of Closed Caption in HD-SDI signal

 \cdot 708 : To be selected to display 708

in HD-SDI signal.

• 608/708 : To be selected to display 608/708

in HD-SDI signal.

· Default setting is 708.

%708 is Closed Captin signal based on EIA/CEA-708 standard.

608/708 is Closed Caption signal

based on EIA/CEA-608 standard, being transmitted by EIA/CEA-708 standard.

3 Setting type of Closed Caption in SD-SDI signal

• 608/ANC : To be selected to display 608/ANC

in SD-SDI signal.

• 608/VBI : To be selected to display 608/VBI

in SD-SDI signal.

· Default setting is 608/ANC.

※608/ANC is Closed Caption signal based on EIA/CEA-608 standard. ※608/VBI is Closed Caption signal based on EIA/CEA-608 standard, being transmitted on 21 lines.

4 Setting for display caption in HD type

- To be selected among SERVICE #1 to #6.
- Default setting is #1.

5 Setting for display caption in SD type

- •To be selected among CC1 to CC4 or TEXT1 to TEXT4.
- · Default setting is CC1.

6 Setting brightness for Closed Caption

- Setting brightness for Closed Caption. To be selected between HIGH and LOW.
- · Default setting is HIGH.

Notice:There are cases where the closed caption can not be displayed correctly, when the input signal is switched. When the setting of ② is 608/708, there is the limitation item like below:

TYPE	Format	Limitation item
HD TYPE	1080p/60	Unsupport
	720p/60	TEXT1~TEXT4 of
	1080i/60	SERVICE(608)
SD TYPE	480i/59.94	None