

Firmware update procedure for Viewfinder AU-VCVF1G

1. How to check firmware version

- 1. Connect a VARICAM Camera module and a recording module and then connect an AU-VCVF1G ("EVF") to be updated. Then switch ON the system.
- 2. Keep press EVF MENU button for 2 seconds to open menu screen. Choose INFORMATION to view current version.




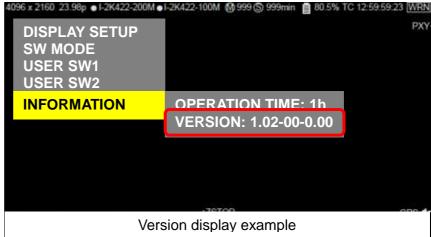

2. Preparation

Prepare following equipment and a firmware package prior to update.


Name	Qty	Remark
SD memory card	1	MAX 64GB MIN 256MB Note: microP2 card can also be used as substitution for SD cards but the card has to be formatted as SD CARD in the SD card slot in advance.
Firmware package (VSI****.zip)	1	Can be downloaded at: http://panasonic.biz/sav/pass_e
VARICAM	1	Camera module (AU-V35C1 or AU-V23HS1) + recording module AU-VREC1G
Computer (PC/Mac)	1	Needed for downloading, unzipping, copying firmware package

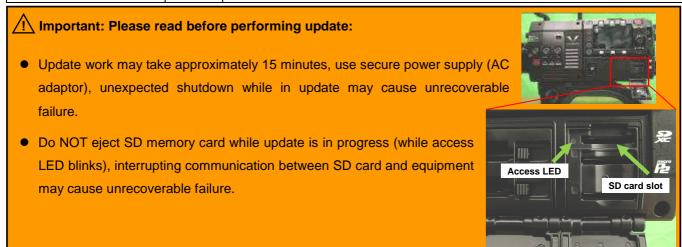

3. Updating firmware


[Preparation]

- 1. Insert an SD memory card into the SD card slot (NOT microP2 card slot) on the unit.
- Format the SD card (MENU: SYSTEM SETTINGS > CARDS/MEDIA > FORMAT CARD > SD CARD)
 Visit Panasonic professional video support website < http://panasonic.biz/sav/pass_e> and download "vsi*****.zip" firmware package.
- 3. Extract the ZIP package (you will see "PRIVATE" folder).
- 4. Mount the formatted SD card to the computer then copy the "PRIVATE" folder to the SD card.

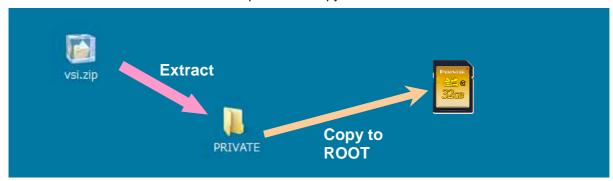

[Perform update]

- 5. Insert the SD card into the SD card slot (NOT microP2 card slot) on the unit.
- 6. Press INFO button to display INFO screen. Press the operation button of VERSION and press the Jog Dial..

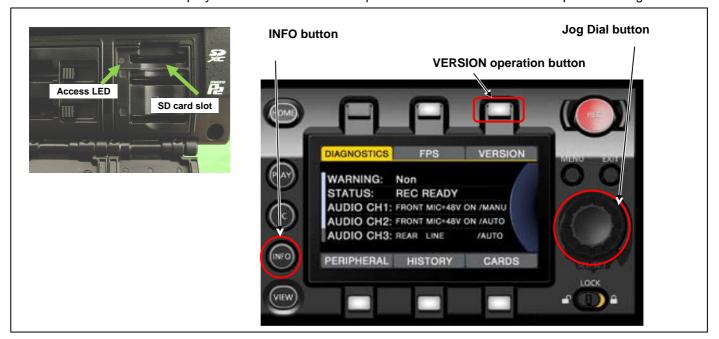

7. When "UPDATE" menu item appears, press the operation button of UPDATE > OK



8. Wait until the "Version update successful" dialog is displayed. It may take approximately 15 minutes (Maximum).




- 9. Remove the SD card.
- 10. Switch OFF the power, and disconnect and connect DC power > switch ON the power to complete.
- 11. Make sure the firmware version.

4. Troubleshoot

1. "UPDATE" menu item does not appear.

It may happen in following cases;

- When package file or copied location are NOT correct ("**PRIVATE**" folder was not copied to the upper directory of the SD card).

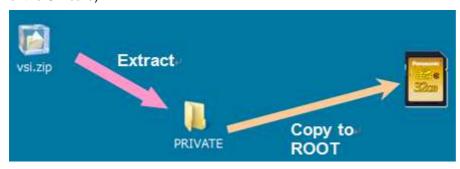

2. VERSION UPDATE ERROR! Screen is displayed!

This error will be happened in following case;

- When firmware package used is for other products. → Check if the package is for the right product.
- When firmware package is corrupted. → Download the firmware package and try again.

