

# Integrated Software Operation Manual (Device Manager Function)

## Contents

|   |    |
|---|----|
| Integrated Software Operation Manual (Device Manager Function) .....              | 1  |
| About the Device Manager Function .....   | 3  |
| Function Overview.....  | 3  |
| Selecting the Device Manager Function .....                                       | 3  |
| Device Registration .....   | 4  |
| About device registration .....   | 4  |
| Device Registration Procedure (When setting device information via the GUI) ..... | 5  |
| Device Registration Procedure (When Importing a CSV File).....                    | 7  |
| Download the CSV file template.....   | 8  |
| CSV File Specifications .....   | 8  |
| Exporting Device Registration Information to a CSV File.....                      | 10 |
| Recommended Settings for Remote Cameras.....                                      | 11 |
| Box Style Camera Settings .....   | 11 |
| Display list of devices and change settings values .....                          | 12 |
| Displaying a List of Devices.....   | 12 |
| Explanation of List Display .....   | 13 |
| Thumbnail Display Explanation .....   | 14 |
| Filtering Devices to Display.....   | 15 |
| Selecting Items to Display in the List .....                                      | 16 |
| Description of List Display Items .....   | 17 |
| Changing Device Setting Values in the List Display .....                          | 19 |
| Locking Device Setting Values in the List Display .....                           | 20 |
| Device Scene File Operations.....   | 21 |
| About Scene File Operations .....   | 21 |
| Supported Data .....  | 21 |
| Handling of Configuration Files Saved on PC.....                                  | 21 |
| Performing Save of Scene File .....   | 22 |
| Performing Copy of Scene File .....   | 23 |
| Device Menu Operations.....   | 26 |
| Displaying the Device Menu.....   | 26 |
| Opening the Device Operation Screen.....  | 27 |
| Opening the Web Screen for a Device.....  | 28 |

|   |    |
|---|----|
| Switching a Device ON.....  | 28 |
| Setting a Device to Standby .....                                 | 29 |
| Start/Stop Video Recording by a Device .....                      | 29 |
| Changing Device Information and Settings.....                     | 30 |
| Deleting a Device.....  | 32 |
| Group Menu Operations .....                                       | 33 |
| Displaying the Group Menu .....                                   | 33 |
| Switching ON all Devices in a Group .....                         | 34 |
| Setting all Devices in a Group to Standby .....                   | 35 |
| Starting/Stopping Video Recording for all Devices in a Group..... | 35 |
| Changing a Group Display Name .....                               | 36 |
| Changing the Device Display Order in a Group.....                 | 37 |
| Moving Devices in a Group to Another Group.....                   | 38 |
| Deleting a Group .....  | 39 |
| Built-in EasyIP Setup Tool Plus Functionality.....                | 40 |
| Main Functions .....  | 40 |
| Screen Explanation .....  | 41 |
| Identify Function .....   | 44 |
| Network Settings Function .....                                   | 45 |
| Auto IP Function .....  | 47 |
| Administrator Registration Function .....                         | 49 |
| Firmware Update Function.....                                     | 50 |
| Activation Function .....   | 53 |
| Selecting Items to Display in the Device List .....               | 56 |
| Function Restrictions by Role.....                                | 57 |
| List of Function Restrictions by Role.....                        | 57 |

# About the Device Manager Function


## Function Overview

The Device Manager function provides the functionality to manage remote cameras and other devices used with this software.

- With the Device Manager function, you can:
  - Register, change registered information of, and delete devices
  - Display list of devices
  - Display/change device settings
  - Operate device scene files (save/copy)
  - Display the web screen of devices
  - Manage device power
  - Use the built-in EasyIP Setup Tool Plus functionality
    - Auto-detect devices on the network
    - Configure device network settings
    - Update device firmware
    - Batch register device administrators
    - Activate device NDI|HX / SMPTE ST 2110

## Selecting the Device Manager Function

Click the [Device Manager] button in the function selection area on the left of the screen to display the Device Manager function screen.

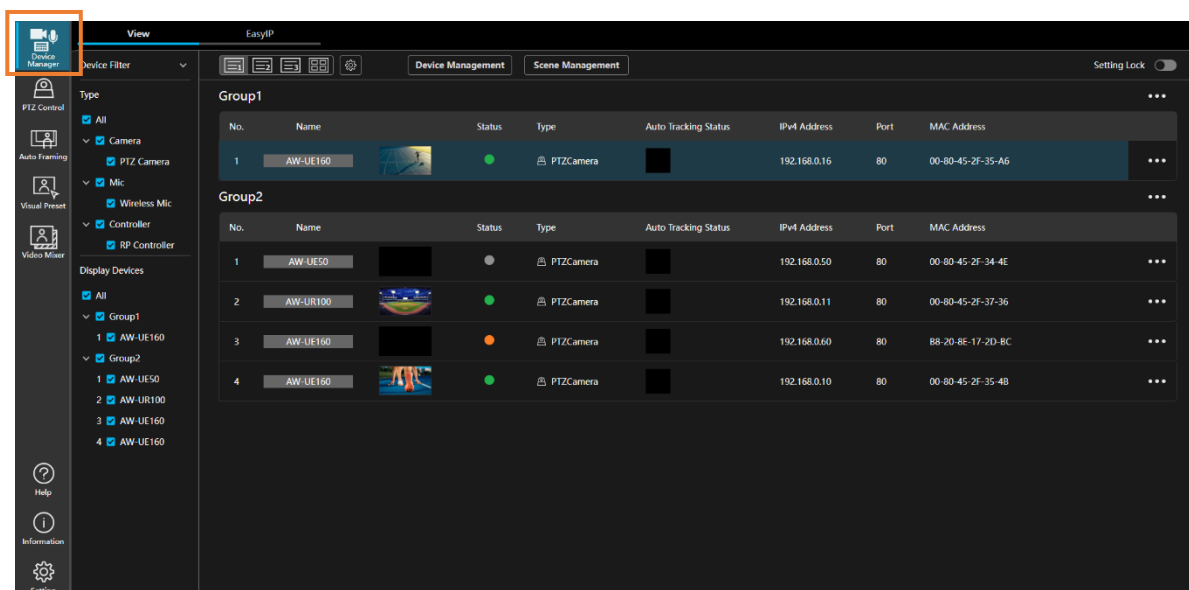

# Device Registration

---

## About device registration

In order to operate a device with this software, the device first needs to be registered in this software.

Device registration can be performed using one of the following methods.

- Set device information via the GUI


On the GUI, you can either select a device to register from among the automatically detected devices, or manually enter the device information to register it.

- Import a CSV file containing device information


Create a CSV file containing device information in advance, and then register the device by importing it into the GUI.

# Device Registration Procedure (When setting device information via the GUI)


If you are registering a device by selecting from automatically detected devices or by manually entering device information, follow the procedure below to complete the registration.

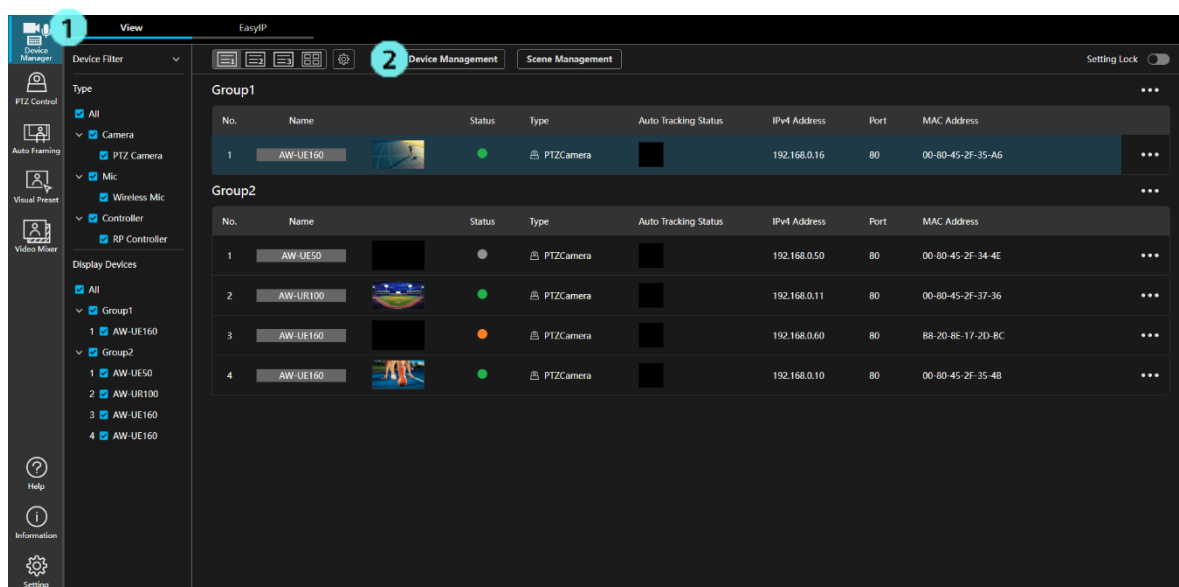

1. Click the [View] tab in the top left of the screen to display the View screen.
2. Click the [Device Management] button in the top of the screen to display the Device Management screen (see below).

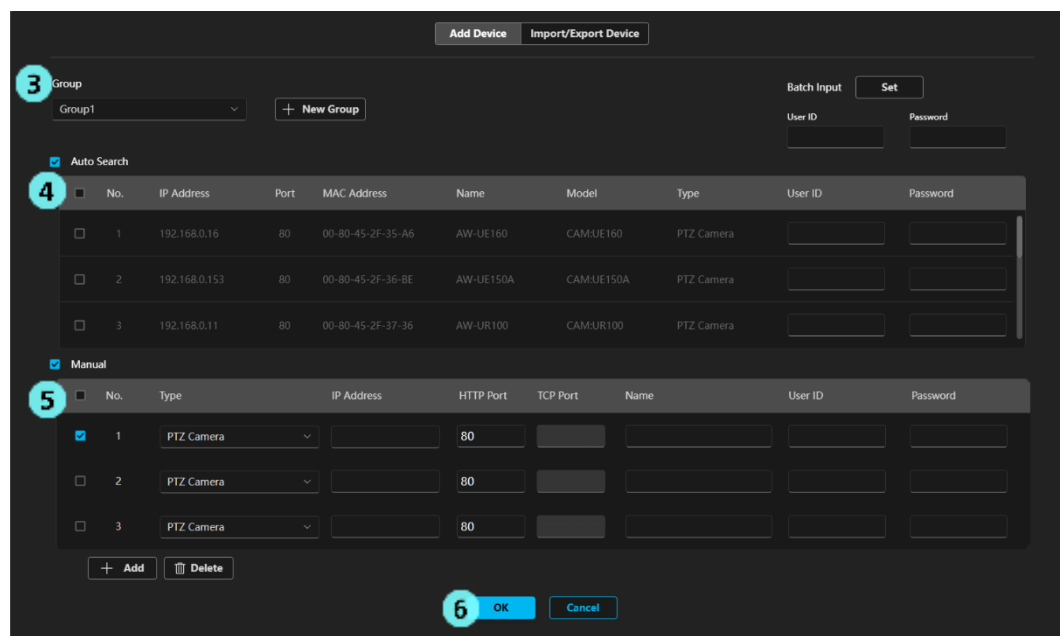

3. Select the group in which to register the device from the [Group] list.  
If you wish to add a new group, click the [New Group] button.  
A field for registering the new group is displayed. Enter the group name and click the [Add] button to add the new group to the [Group] list.



New Group Name

Room4

Add Cancel

4. Automatically detected devices on the network are displayed under [Auto Search].

Check the checkbox next to the device(s) you wish to add and enter the account and password in the [User ID] and [Password] fields.

Checking the checkbox of multiple devices allows you to register multiple devices at the same time.

5. If you wish to manually register a device, check the [Manual] checkbox and then enter the device information below.

Type: Select the device type from the list.

PTZ Camera: Select this when registering a remote camera or a box style camera.

RP Controller: Select this when registering a remote camera controller.

Wireless Mic: Select this when registering a wireless mic system.

IP Address: Enter the IPv4 address of the device.

HTTP Port: Enter the HTTP port number of the device.

TCP Port: No input required (for future expansion)

Name: Enter a display name for the device.

User ID: Enter the account for the device.

Password: Enter the password for the device.

<NOTE>

- You can specify the user ID and password for all checked devices in the [Auto Search] and [Manual] areas at the same time by entering the account and password in the [User ID]/[Password] fields under [Batch Input] in the top right of the screen and pressing the [Set] button.

If you wish to register multiple devices at the same time, click the [Add] button to add another row in which to enter information, and then enter the information in the same way.


6. Click the [OK] button to register the device(s).

## Device Registration Procedure (When Importing a CSV File)


If you are registering devices by importing a CSV file containing device information, follow the procedure below to complete the registration.

For details on how to format the device information in the CSV file, refer to the section “[CSV File Specifications](#)” in this manual.

1. Display the device management screen by following steps 1 and 2 of “[Device Registration Procedure \(When setting device information via the GUI\)](#)”
2. Click the [Import/Export Device] tab at the top of the device management screen.

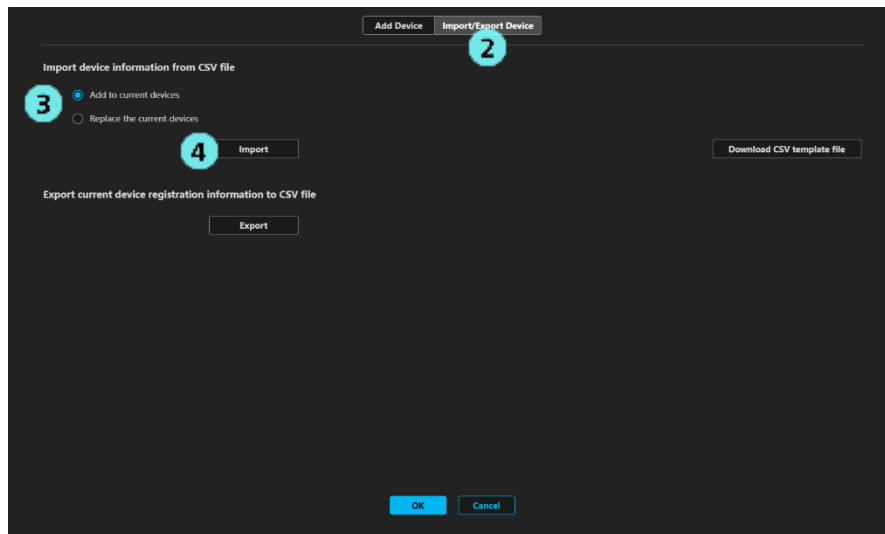

3. In the [Import device information from CSV file] section, select the registration method.
  - Add to current devices  
Registers the devices by adding them after the currently registered devices.
  - Replace the current devices  
Clears all currently registered devices and registers the new devices in their place.
4. Click the [Import] button to display the file selection dialog, then select the CSV file.
5. A list of devices to be registered will be displayed. Modify as necessary.

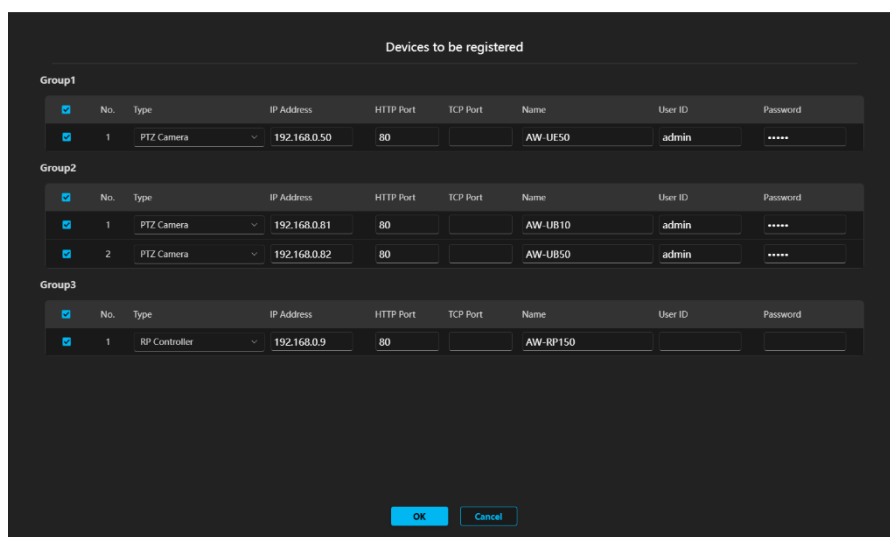

6. Click the OK button on the device list screen to complete the registration.

---


## Download the CSV file template

You can download the CSV template file from the device management screen of this software.

When creating a CSV file, it is recommended to use the template file as a basis.

Follow the steps below to download:

1. Display the device management screen by following steps 1 and 2 of “[Device Registration Procedure \(When setting device information via the GUI\)](#)”
2. Click the [Import/Export Device] tab at the top of the device management screen.

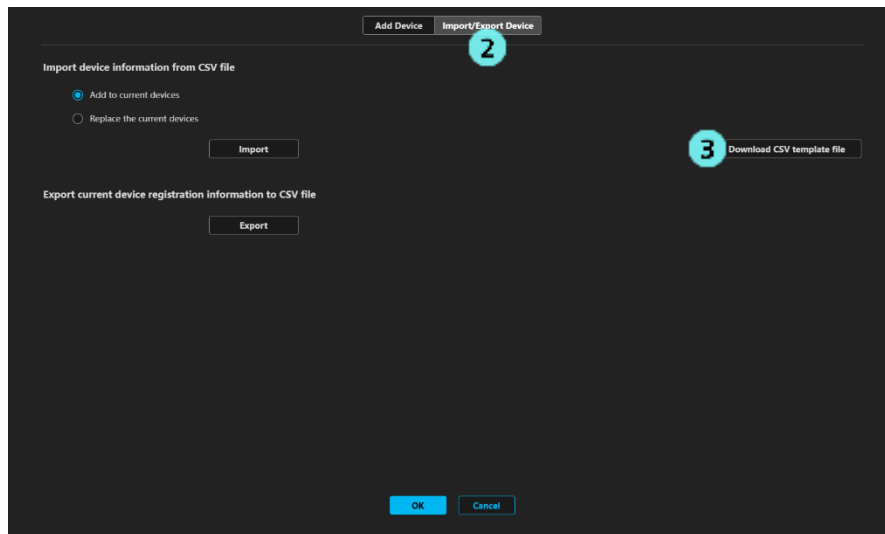

3. Click the [Download CSV template file] button, and the file “MPS\_DeviceRegistrationTemplate.csv” will be exported to your download folder.

---

## CSV File Specifications

The specifications for the CSV file that contains device information are as follows:

- The contents of the first row are not used (it is assumed to contain item descriptions).
- The items to be entered in each column are as follows:
  - 1st column: Group Name
  - 2nd column: Device Type Number
  - 3rd column: IP Address
  - 4th column: HTTP Port
  - 5th column: TCP Port
  - 6th column: Device Name
  - 7th column: User ID
  - 8th column: Password
- Details of each item:



| Item Name          | Description   | Remarks  |
|--------------------|---|--|
| Group Name         | <p>Enter the group name to which the device will be registered.</p> <p>The following character types and lengths are allowed:</p> <p>Character Type: No restrictions</p> <p>Character Length: 1 to 32 characters (characters from the 33rd character onwards will be ignored)</p> | <p>If omitted, the device will be registered to the first group.</p> <p>If the group does not exist, it will be automatically created.</p> |
| Device Type Number | <p>Enter the device type as a number.</p> <p>0: PTZ Camera</p> <p>10: Wireless Mic</p> <p>20: RP Controller</p>   | <p>If omitted, it will be registered as 0: PTZ Camera.</p>   |
| IP Address         | Enter the device's IP address.  |  |
| HTTP Port          | Enter the device's HTTP port number.  | If omitted, 80 will be set.  |
| TCP Port           | Not currently used. Leave blank.  |  |
| Device Name        | <p>Enter the registration name for the device.</p> <p>The following character types and lengths are allowed:</p> <p>Character Type: No restrictions</p> <p>Character Length: 1 to 32 characters (characters from the 33rd character onwards will be ignored)</p>                  | <p>If omitted, and if a device with the same IP Address and HTTP Port is auto-detected, its Title info will be used as the name.</p>       |
| User ID            | Enter the account name used to log in to the device.  |  |
| Password           | Enter the password used to log in to the device.  |  |

- Example of entry:

When registering a PTZ camera with IP address 192.168.0.10 to Group1, and a PTZ camera with IP address 192.168.0.20 to Group2:

Group, Device Type Number(0:PTZ Camera 10:Wireless Mic 20:RP Controller), IP Address, HTTP Port, TCP Port, Device Name, User ID, Password

Group1,0,192.168.0.10,80,,AW-UE160,ptz\_user,ptz\_password


Group2,0,192.168.0.20,80,,AW-UE150,ptz\_user,ptz\_password

---

## Exporting Device Registration Information to a CSV File

You can export the information of devices registered in this software to a CSV file.

1. Display the device management screen by following steps 1 and 2 of “[Device Registration Procedure \(When setting device information via the GUI\)](#)”
2. Click the [Import/Export Device] tab at the top of the device management screen.

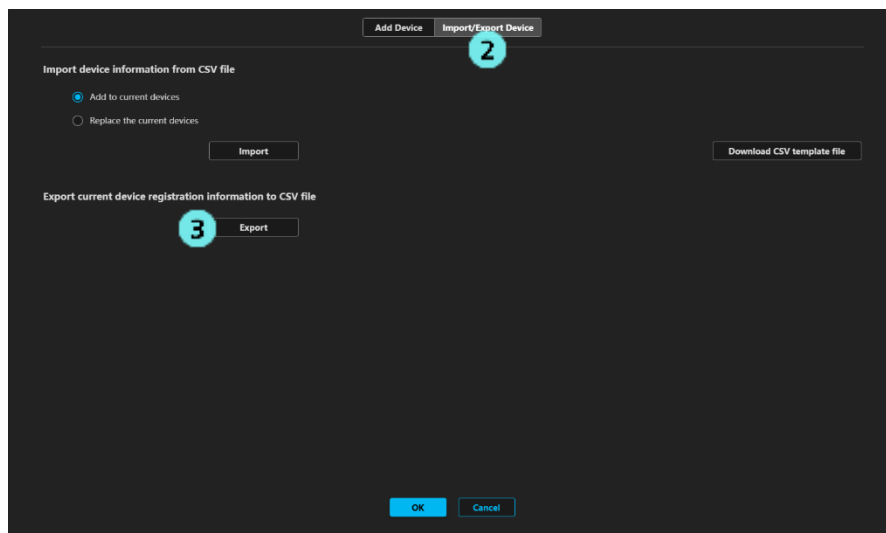

3. In the [Export current device registration information to CSV file] section, click the [Export] button, and the file “MPS\_RegisteredDevices.csv” will be exported to your download folder.

### <NOTE>

If a comma ( , ) is included in the Group Name, Device Name, User ID, or Password, the comma will be converted to a period ( . ) in the exported data.

---

## Recommended Settings for Remote Cameras

When registering and using remote cameras with this software, the following settings are recommended for remote cameras. See the operation manual for the relevant remote camera for how to configure the settings.

- JPEG image capture size settings

JPEG(1): 1280x720

JPEG(2): 640x360

JPEG(3): 320x180

\*For cameras that only have one JPEG setting, set to 1280x720 or 640x360

- JPEG refresh interval (frame rate)

Set JPEG(1), JPEG(2), and JPEG(3) to the largest possible value.

---

## Box Style Camera Settings

To register and use a Box Style Camera in this software, the following settings are required in advance.

- Camera account settings (ID/PW settings)

Select Administrator Registration in the built-in EasyIP Setup Tool Plus function of this software to set up the camera account.

See [Administrator Registration Function](#) in this manual for details.

- Camera's LAN operation mode settings

In the camera's settings menu, set "IN/OUT" → "LAN" → "LAN function" to "Control With Controller"


For details, please refer to the camera's operating manual.

# Display list of devices and change settings values

## Displaying a List of Devices

A list of registered devices is displayed on the View screen.


Click the [View] tab in the top left of the screen to display the View screen.

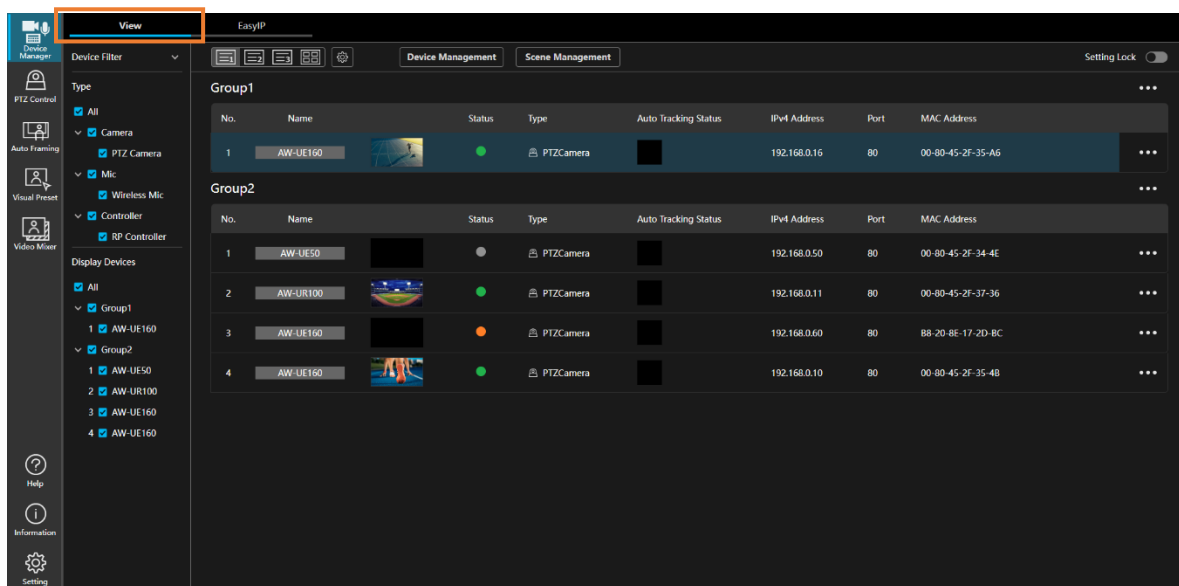

You can choose to display the list of devices in List View 1, List View 2, List View 3, or Thumbnail View using the



buttons on the screen.

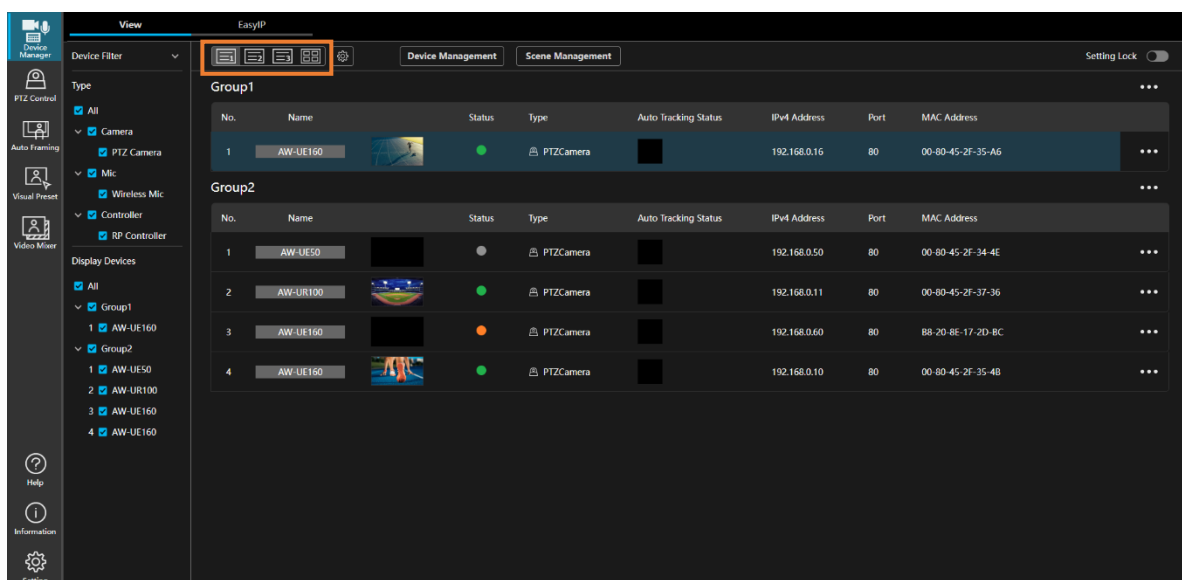

## Explanation of List Display

The screenshot shows a web interface for a security system. At the top left, a group name 'Room1' is displayed, labeled with a red circle '1'. To its right is a three-dot menu button, labeled with a red circle '2'. Below the group name is a table of devices, labeled with a red circle '3'. The table has columns: No., Name, Status, Type, Auto Tracking Status, IP Address, Port, MAC Address, and Image Capture Type. It contains two rows of device information. To the right of the table is another three-dot menu button, labeled with a red circle '4'.

| No. | Name     | Status | Type       | Auto Tracking Status | IP Address  | Port | MAC Address       | Image Capture Type |
|-----|----------|--------|------------|----------------------|-------------|------|-------------------|--------------------|
| 1   | AW-UE150 | Online | PTZ Camera | Tracking             | 192.168.0.1 | 80   | 20-C6-E8-EF-02-00 | IP (50 fps)        |
| 2   | AW-UE70  | Online | PTZ Camera | Stopped              | 192.168.0.2 | 80   | 20-C6-E8-EF-02-01 | IP (50 fps)        |

### 1. Group name display

Indicates the name of the group to which a device belongs.

### 2. Group menu display button

Press this button to display a group menu for operations on the relevant group.

For details, see the [“Group Menu Operations”](#) section of this manual.

### 3. Device display area

List the registered devices by group.

The items displayed in the list can be set for each of List Display 1, List Display 2, and List Display 3.

For instructions on how to set the items to be displayed, refer to [“Selecting Items to Display in the List”](#).


For descriptions of the items that can be displayed, refer to [“Description of List Display Items”](#).

### 4. Device menu display button

Press this button to display a device menu showing operations you can perform on the relevant device.

For details, see the [“Device Menu Operations”](#) section of this manual.

# Thumbnail Display Explanation

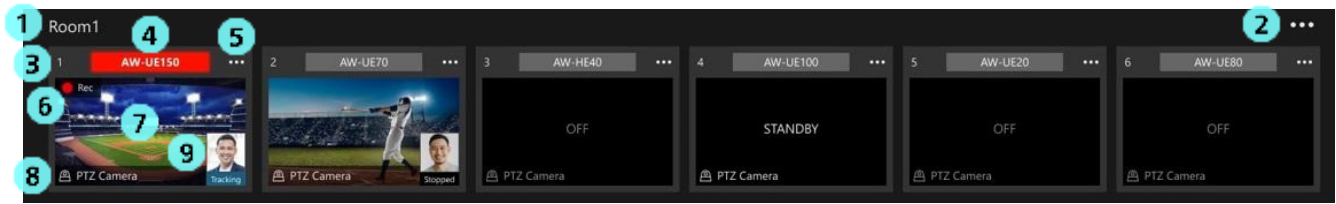

## 1. Group name display

Indicates the name of the group to which a device belongs.

## 2. Group menu display button

Press this button to display a group menu for operations on the relevant group.

For details, see the [“Group Menu Operations”](#) section of this manual.

## 3. No.

Indicates the management number for devices in a group.

## 4. Name

Indicates the name of a device. If the type of the device is camera and the tally light is on, the background color changes to the color of the tally light.

## 5. Device menu display button

Press this button to display a device menu showing operations you can perform on the relevant device.

For details, see the [“Device Menu Operations”](#) section of this manual.

## 6. Recording state

Indicates the recording state if a device is currently recording.

## 7. Thumbnail

If the type of the device is camera, this shows the video being recorded by the camera. If the type of the device not camera, an image is displayed according to the type of the device.

This displays STANDBY when a device is in standby, and displays OFF when the device is not connected or is switched OFF.

## 8. Type

Indicates the type of the device.

## 9. Auto Tracking Status

Displays the faces registered for face recognition.

When the device is performing auto tracking, displays the auto tracking status (Tracking, Lost, Stopped).

## Filtering Devices to Display


You can use the following criteria to filter the devices that are displayed.

- Type: Filter devices by type

The only devices displayed on the screen will be those of the types checked in the [Type] tree on the left of the screen (see 1 below).

- Individual device: Specify the individual devices you wish to display

The only devices displayed on the screen will be those checked in the [Display Devices] tree on the left of the screen (see 2 below).

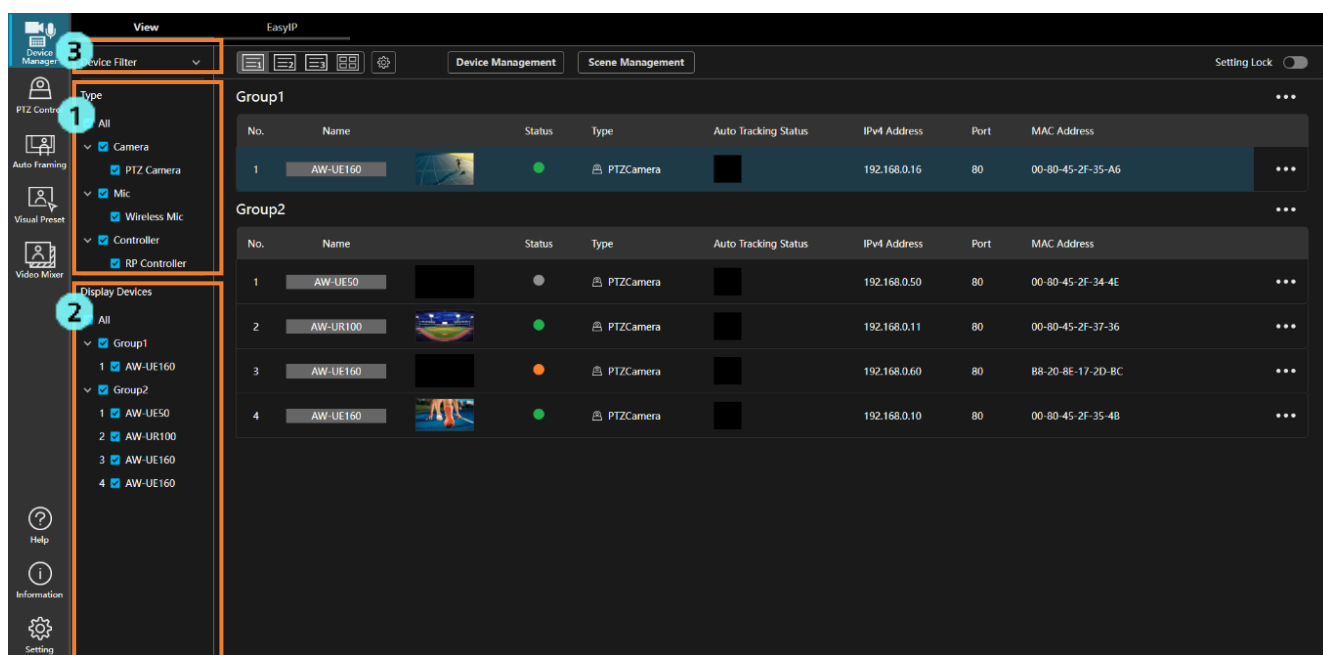


### <NOTE>


If filtering devices is not necessary, you can toggle the display of the filtering tree by clicking on the title part of the filtering tree (as shown in Figure 3 above).

## Selecting Items to Display in the List


You can set the items to be displayed for each of List View 1, List View 2, and List View 3.

Follow the steps below to set the items to be displayed.

1. Click the [Setting] button  at the top of the screen to display the Setting screen.

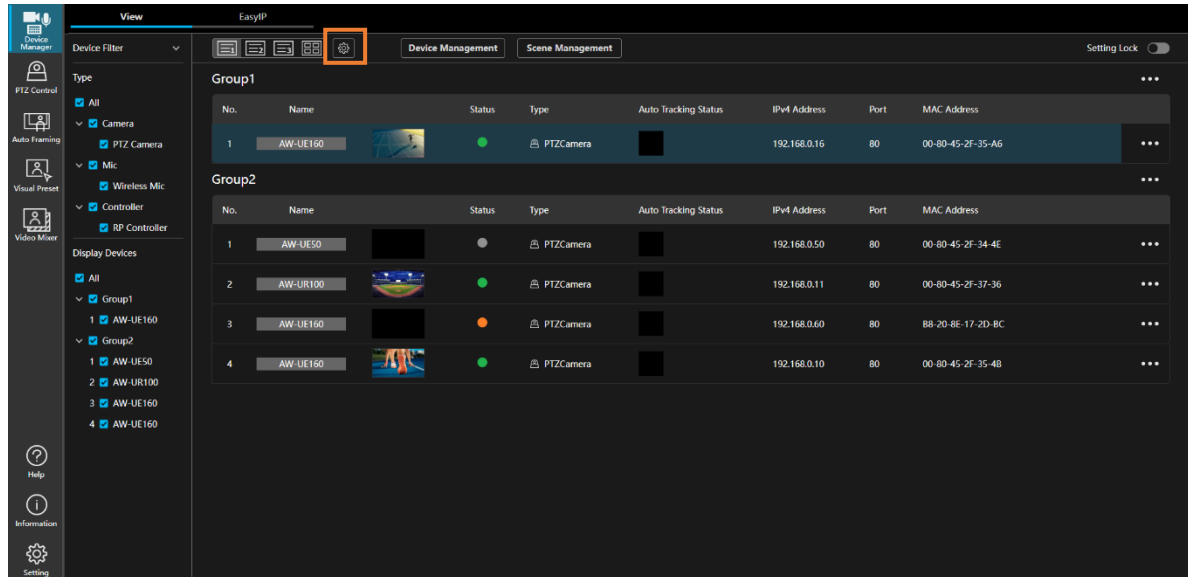

2. In the List1 / List2 / List3 tabs, select which display to set for List View 1, List View 2, or List View 3.

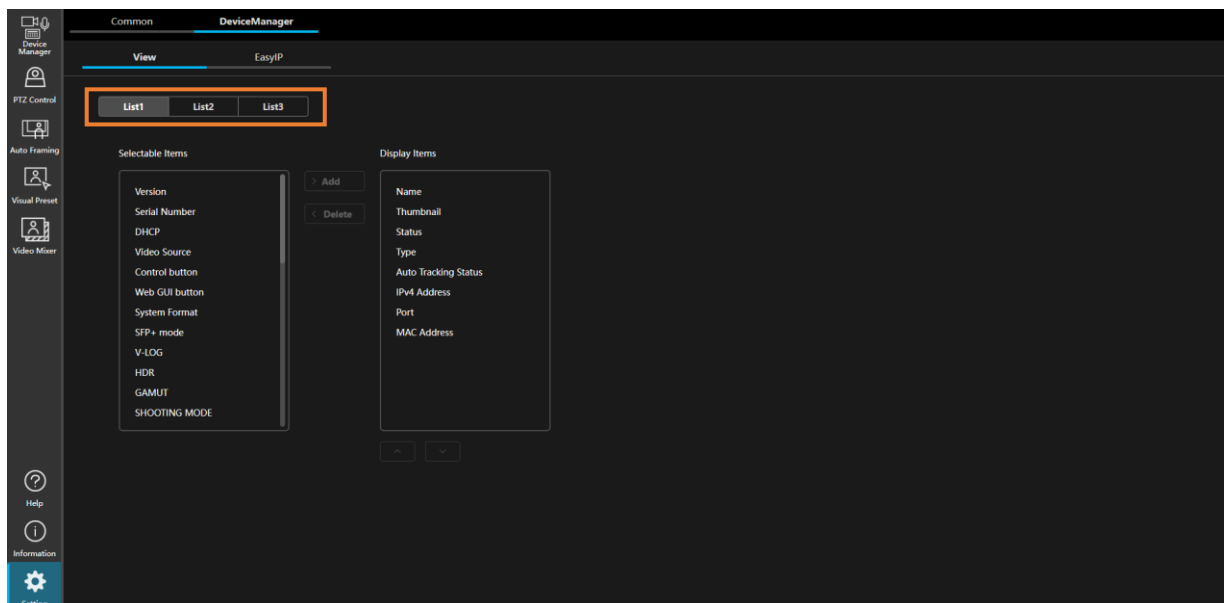

3. If you wish to show an item that is hidden, select the relevant item from [Selectable Items] and then click the [> Add] button. The item will move to [Display Items] and will be shown.

If you wish to hide an item that is shown, select the relevant item from [Display Items] and then click the [< Delete] button. The item will move to [Selectable Items] and will be hidden.

You can also change the order in which items are displayed by selecting an item in [Display Items] and then clicking the up and down buttons beneath [Display Items].



## Description of List Display Items

The items that can be displayed in the list display are as follows.

Items with a circle in the "Change Setting Value" column can have their setting values changed in the list display.

For details, refer to ["Changing Device Setting Values in the List Display"](#).

|                      |   |                      | Initial Display |       |       |
|----------------------|---|----------------------|-----------------|-------|-------|
| Item name            | Description   | Change Setting Value | List1           | List2 | List3 |
| Name                 | Displays the name of the device. If the device type is a camera and the tally lamp is on, the background color changes to the color of the tally lamp.  |                      | ○               | ○     | ○     |
| Thumbnail            | If the device type is a camera, the image captured by the camera is displayed. If the device type is not a camera, an image corresponding to the device type is displayed.  |                      | ○               |       |       |
| Status               | Displays the connection status of the device by color.<br>Green: The device is connected and operating.<br>Orange: The device is connected but in standby mode.<br>Gray: The device is not connected or is powered off.                             |                      | ○               |       |       |
| Type                 | Displays the type (category) of the device.   |                      | ○               |       |       |
| Auto Tracking Status | Displays the auto tracking status of the device and the face registered for facial recognition.<br>Tracking: The device is tracking the target.<br>Lost: The device has lost the target.<br>Stopped: The device is not set to track and is stopped. |                      | ○               |       |       |
| IPv4 Address         | Displays the network address.   |                      | ○               |       |       |
| Port                 | Displays the port number.   |                      | ○               |       |       |
| MAC Address          | Displays the MAC address.   |                      | ○               |       |       |
| Version              | Displays the firmware version.  |                      |                 |       |       |
| Serial Number        | Displays the serial number.   |                      |                 |       |       |
| DHCP                 | Displays the DHCP settings.   |                      |                 |       |       |
| Video Source         | Displays the type of video source.  |                      |                 |       |       |
| Control Button       | Displays the control button.<br>Clicking the button displays the device control screen.   |                      |                 | ○     |       |

|                           |   |   |  |   |   |
|---------------------------|---|---|--|---|---|
| Web GUI Button            | Displays the Web GUI button.<br>Clicking the button displays the device's Web GUI screen. |   |  | ○ |   |
| System Format             | Displays the system format settings   | ○ |  | ○ |   |
| SFP+ mode                 | Displays the SFP+ mode settings.  | ○ |  | ○ |   |
| V-LOG                     | Displays the V-LOG settings.  | ○ |  | ○ |   |
| HDR                       | Displays the HDR settings.  | ○ |  | ○ |   |
| GAMUT                     | Displays the GAMUT settings.  | ○ |  | ○ |   |
| SHOOTING MODE             | Displays the SHOOTING MODE settings.  | ○ |  | ○ |   |
| SYNC REF SIGNAL           | Displays the SYNC REF SIGNAL settings.  | ○ |  | ○ |   |
| GENLOCK H<br>PHASE COARSE | Displays the GENLOCK H PHASE COARSE settings.   | ○ |  | ○ |   |
| GENLOCK H PHASE FINE      | Displays the GENLOCK H PHASE FINE settings.   | ○ |  | ○ |   |
| Streaming Mode            | Displays the streaming mode settings.   | ○ |  | ○ |   |
| Streaming Resolution      | Displays the streaming resolution settings.   | ○ |  | ○ |   |
| Streaming Frame Rate      | Displays the streaming frame rate settings.   | ○ |  | ○ |   |
| Streaming Bit Rate        | Displays the streaming bit rate settings.   | ○ |  | ○ |   |
| Scene                     | Displays the scene settings.  | ○ |  |   | ○ |
| Iris                      | Displays the iris settings.   | ○ |  |   | ○ |
| WB                        | Displays the WB mode settings.  | ○ |  |   | ○ |
| Gain                      | Displays the gain settings.   | ○ |  |   | ○ |
| R Gain                    | Displays the R gain settings.   | ○ |  |   | ○ |
| B Gain                    | Displays the B gain settings.   | ○ |  |   | ○ |
| MASTER PEDESTAL           | Displays the master pedestal settings.  | ○ |  |   | ○ |
| R PEDESTAL                | Displays the R pedestal settings.   | ○ |  |   | ○ |
| G PEDESTAL                | Displays the G pedestal settings.   | ○ |  |   | ○ |
| B PEDESTAL                | Displays the B pedestal settings.   | ○ |  |   | ○ |
| Shutter                   | Displays the shutter settings.  | ○ |  |   | ○ |
| ND Filter                 | Displays the ND filter settings.  | ○ |  |   | ○ |
| Color Collect ON/OFF      | Displays the color collect ON/OFF settings.   | ○ |  |   | ○ |
| Color Collect Table       | Displays the color collect table settings.  | ○ |  |   | ○ |
| Gamma ON/OFF              | Displays the gamma ON/OFF settings.   | ○ |  |   | ○ |
| Gamma Mode                | Displays the gamma mode settings.   | ○ |  |   | ○ |


<NOTE>

The display items supported by the device vary depending on the model. Display items that are not supported by the device are shown as "-"


## Changing Device Setting Values in the List Display

Items that support changing setting values are displayed with a box shape.


You can change the setting values by clicking on the box.

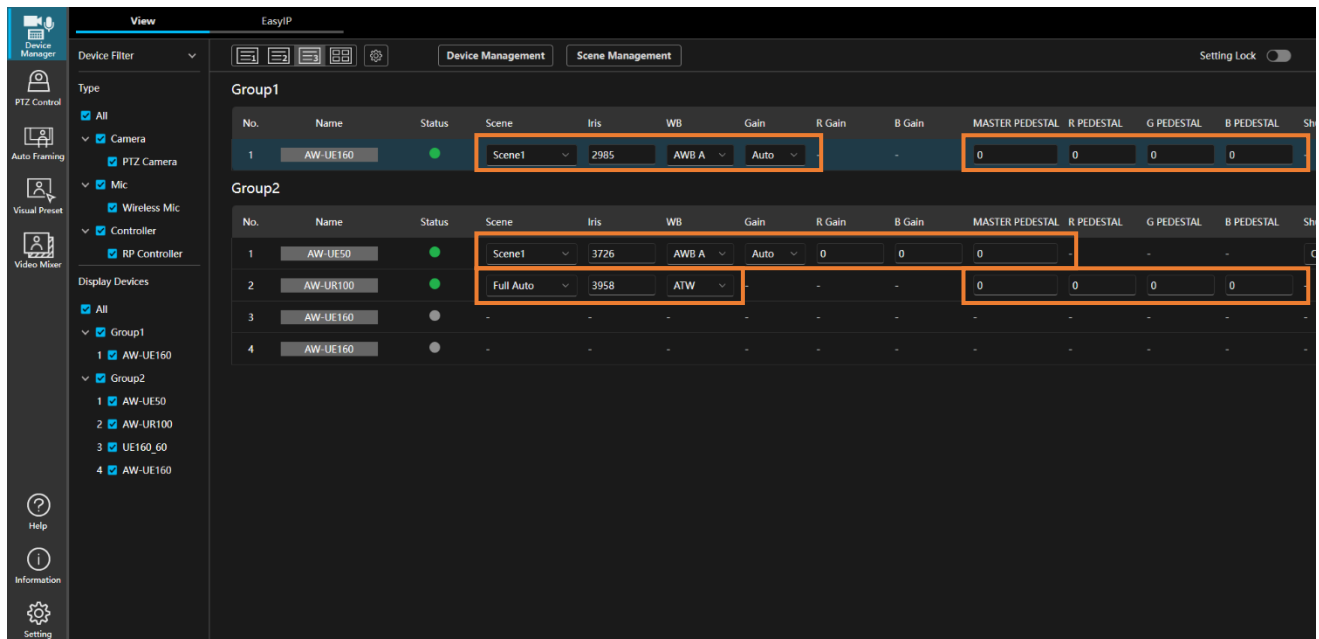

If the setting value is in the form of a list, select the value from the displayed list.

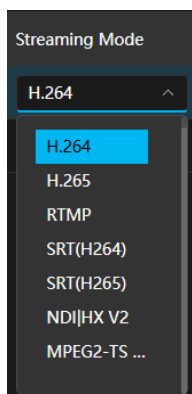


If the setting value is in the form of a value to be set, use one of the following methods to set the value: slider, increment/decrement buttons on the right end of the box, or directly input the value into the box.

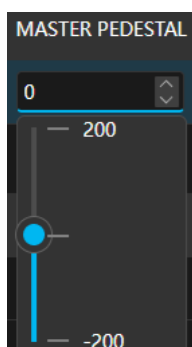

<NOTE>

- If the account authority is User, the setting values cannot be changed.



# Device Scene File Operations

---

## About Scene File Operations

In Scene File Operations, you can perform the following tasks:

- Save Scene File

You can save the device's scene file settings as a configuration file on your PC.

- Copy Scene File

You can copy the device's scene file settings to other devices of the same model.

You can copy the settings from the configuration file saved on your PC to devices of the same model.

### <NOTE>

- When performing an operation from a client PC, a tool for client PC must be installed on the PC in advance.

Please download and install it from our website

([https://www.pass.panasonic.co.jp/pro-av/support/content/download/EN/ep2main/mps\\_client\\_tool\\_e.htm](https://www.pass.panasonic.co.jp/pro-av/support/content/download/EN/ep2main/mps_client_tool_e.htm)).

---

## Supported Data

Both Save and Copy support only the following data. An asterisk (\*) represents any number.

- Camera (SCENE\*)
- Camera (USER\*)
- Camera (PRESET)
- Camera (FULL AUTO)
- Camera (SYSTEM)

---

## Handling of Configuration Files Saved on PC

Do not change the file extension of the files saved on your PC using the Save operation.

If you change the file extension, you will not be able to use the files for the Copy operation or for uploading on the camera web screen.


Additionally, if the file name is changed, it can be used for the Copy operation, but it may not be usable for the Upload operation on the camera web screen.

# Performing Save of Scene File

With the Save operation, you can save the device's scene file settings as a settings file on your PC.

Follow these steps to perform the operation:

1. Click the [Scene Management] button at the top of the screen.

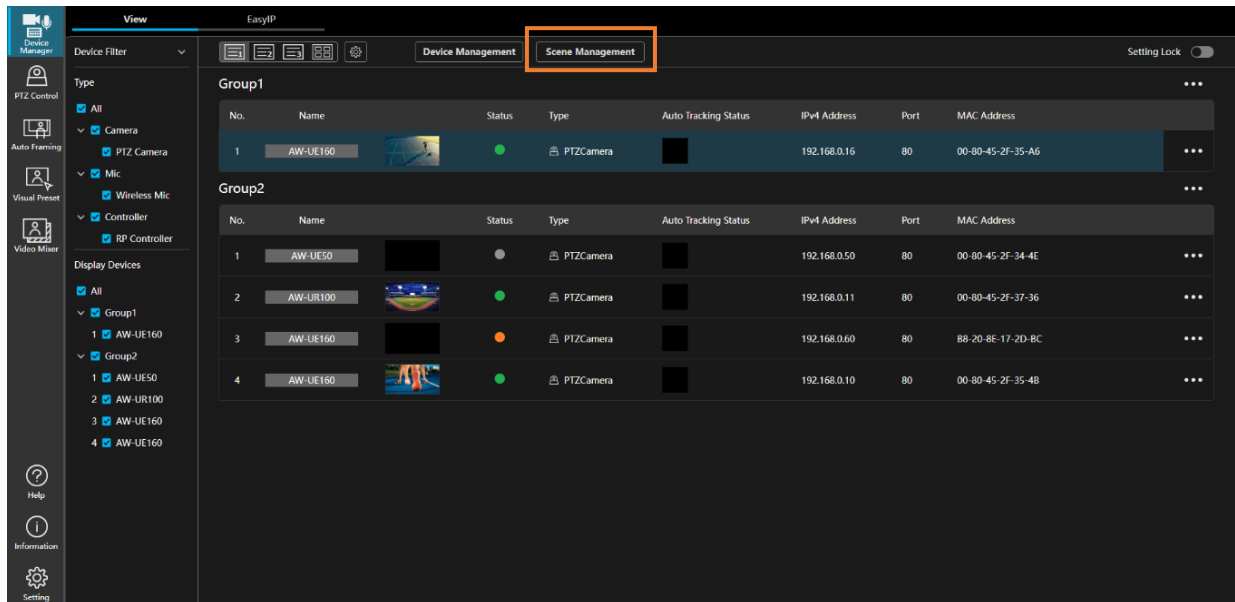


2. The Scene File Management screen will be displayed.

In the Camera area of the Save column, select the camera and data to save.

3. When you click the [Save to file] button, a dialog box will appear to select the save destination.

Select the save destination and click the OK button to save the configuration file.

**\* If a message appears asking for permission to open the SceneManagementWebProgram when you click the [Save to file] button, please allow it.**

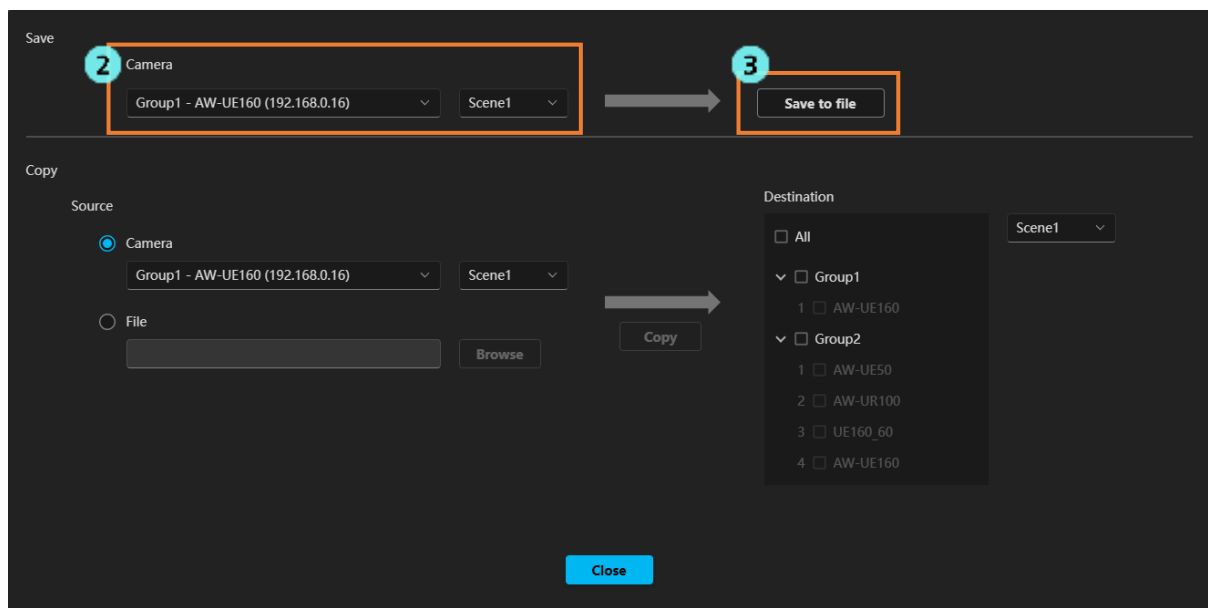

# Performing Copy of Scene File

With the Copy operation, you can copy the device's scene file settings to other devices or copy the settings from a configuration file saved on your PC to the device.


You can perform the copy operation on multiple devices simultaneously.

\* Copying is limited to devices of the same model. Copying between different models is not possible.

\* The camera may restart after copying is complete.

Follow these steps to perform the operation:


1. Click the [Scene Management] button at the top of the screen.

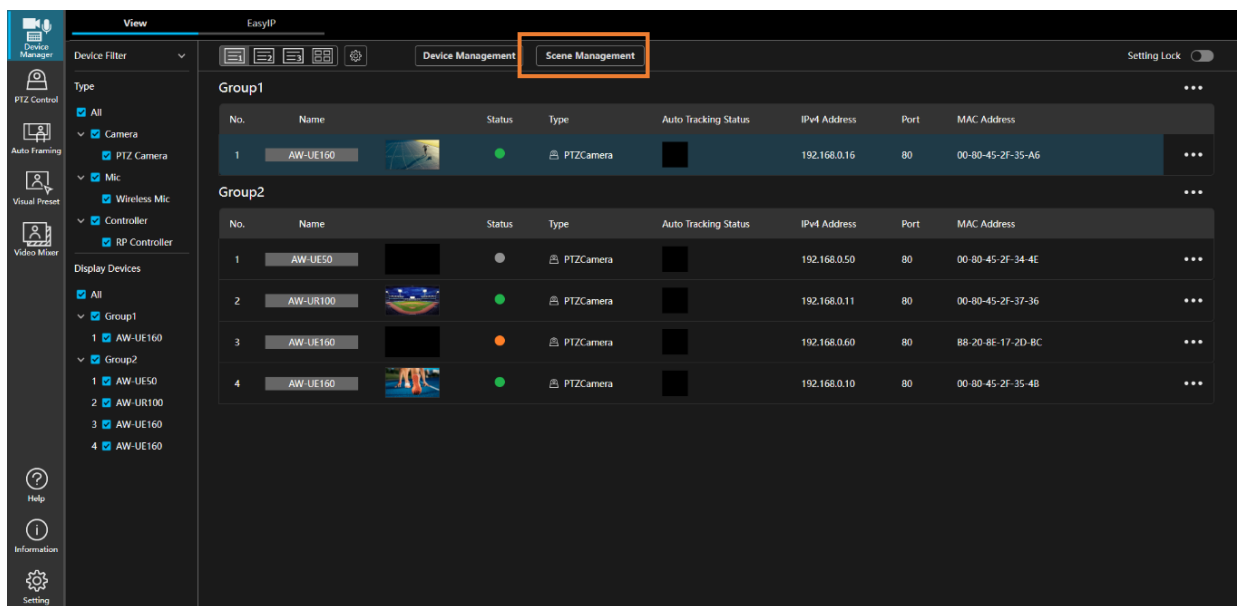

2. The Scene File Management screen will be displayed.

- When copying from a device


Select "Camera" in the Source section of the Copy column and select the camera and data to be copied.

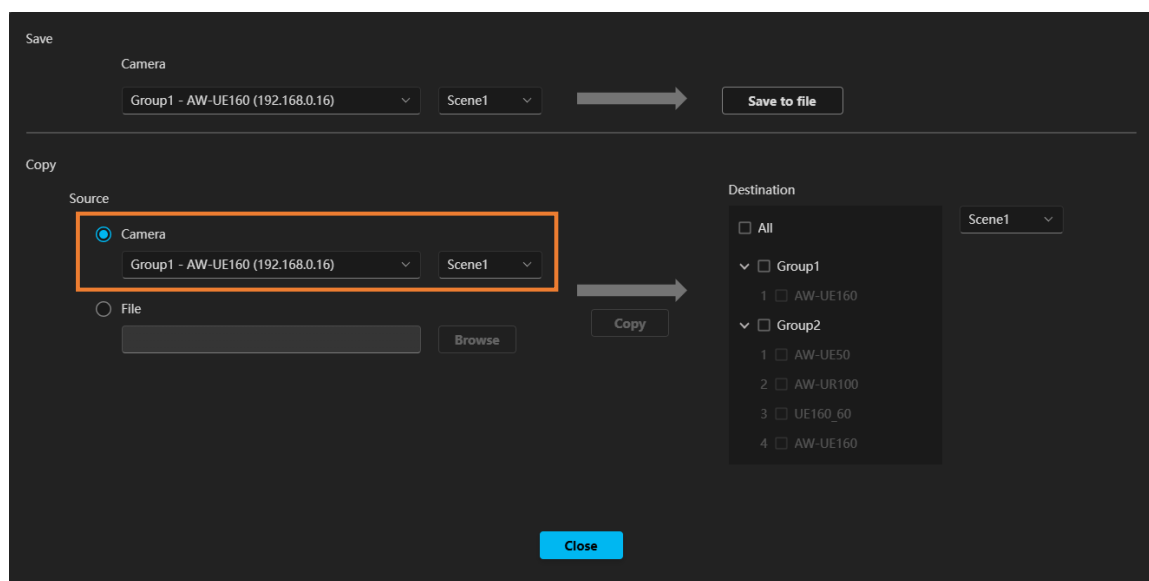

- When copying from a file

Select "File" in the Source section of the Copy column and click the [Browse] button. A dialog box for selecting a file will be displayed. Select the saved configuration file and click the OK button.

\* If a message appears asking for permission to open the SceneManagementWebProgram when you click the [Browse] button, please allow it.

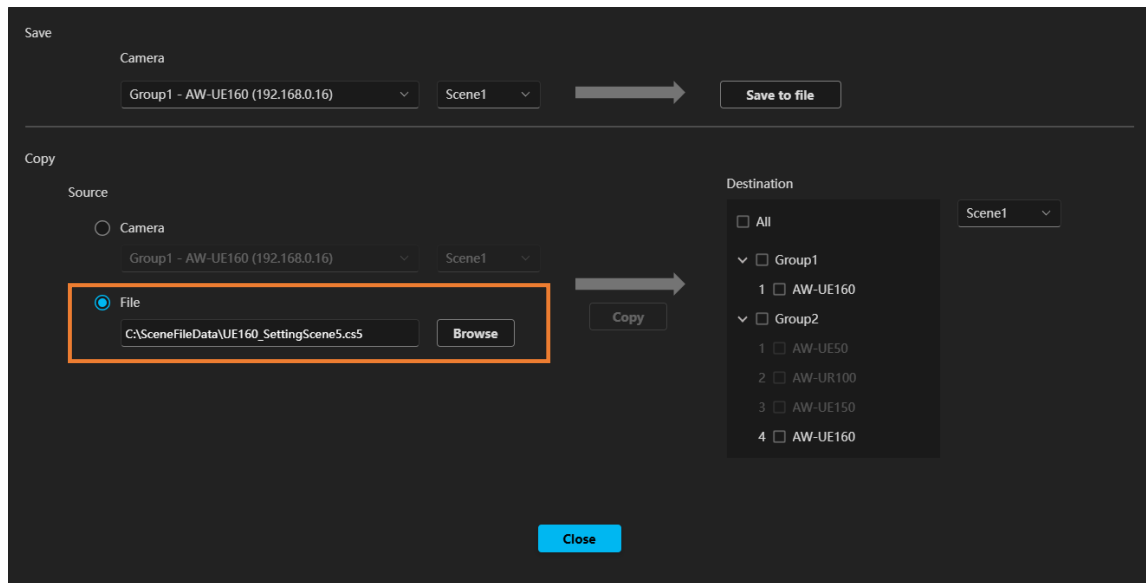


3. In the Destination section, select the device and data to be copied.

Select the device by turning on the check at the beginning of the device name in the tree.

- Only devices of the same model as the source can be selected.
- If you check multiple devices, the data will be copied to multiple devices simultaneously.

Only data of the same type as the source can be selected.

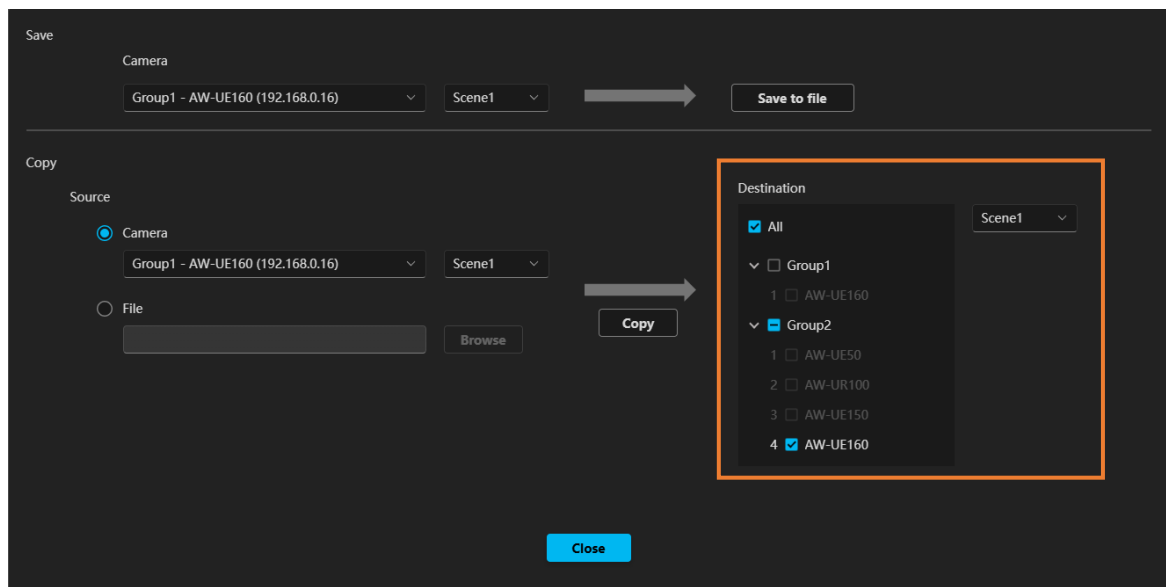

4. When you click the [Copy] button, a confirmation message to start copying will be displayed. Click OK to execute the copy.

Depending on the device and operating environment, it may take several minutes to complete the copy.



Save

Camera

Group1 - AW-UE160 (192.168.0.16)

Scene1

→

Save to file

Copy

Source

☒ Camera
 

Group1 - AW-UE160 (192.168.0.16)

Scene1

☐ File
 

Browse

Destination

☒ All
 

☐ Group1
 

1 ☐ AW-UE160

☒ Group2
 

1 ☐ AW-UE50

2 ☐ AW-UR100

3 ☐ AW-UE150

4 ☒ AW-UE160

Scene1

Copy

Close

During and after copying, the following screen will be displayed.

Cameras that have successfully completed the copy will be displayed in the [List of cameras successfully], and cameras that failed to complete the copy will be displayed in the [List of cameras that failed].

Setting up camera  
Please wait...

Please wait and do not turn off the power during this progress.

List of cameras successfully

| No. | IPv4 Address | Name | Mac Address |
|-----|--------------|------|-------------|
|     |              |      |             |
|     |              |      |             |
|     |              |      |             |
|     |              |      |             |
|     |              |      |             |

List of cameras that failed

| No. | IPv4 Address | Name | Mac Address |
|-----|--------------|------|-------------|
|     |              |      |             |
|     |              |      |             |
|     |              |      |             |
|     |              |      |             |
|     |              |      |             |

Close

# Device Menu Operations

## Displaying the Device Menu


Operations on devices are performed from the device menu.

The device menu is displayed with the procedure below.

1. Select the relevant device on the View screen.
2. Click the device menu display button for the selected device.


- In list display

Click the [...] button to the right of the device information.

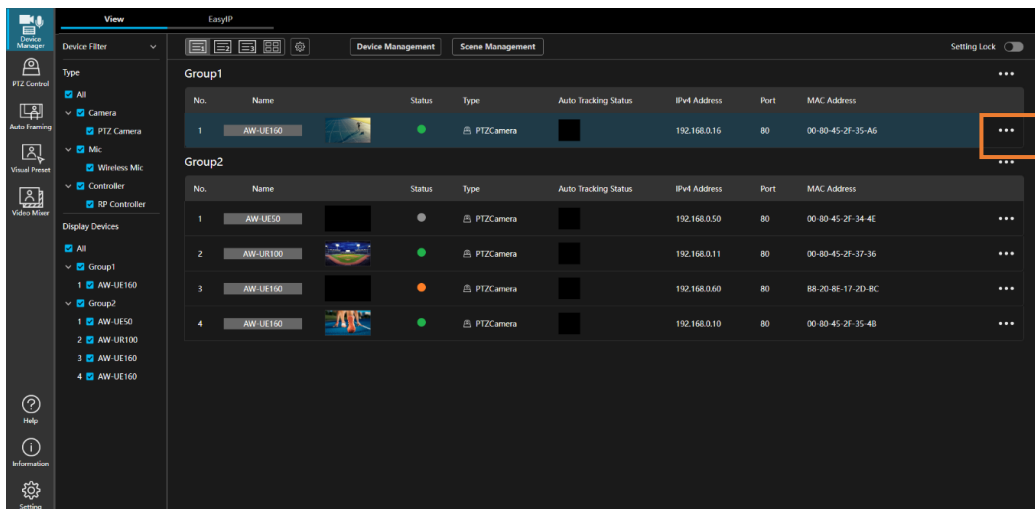


- In thumbnail display

Click the [...] button in the top right of the relevant thumbnail.

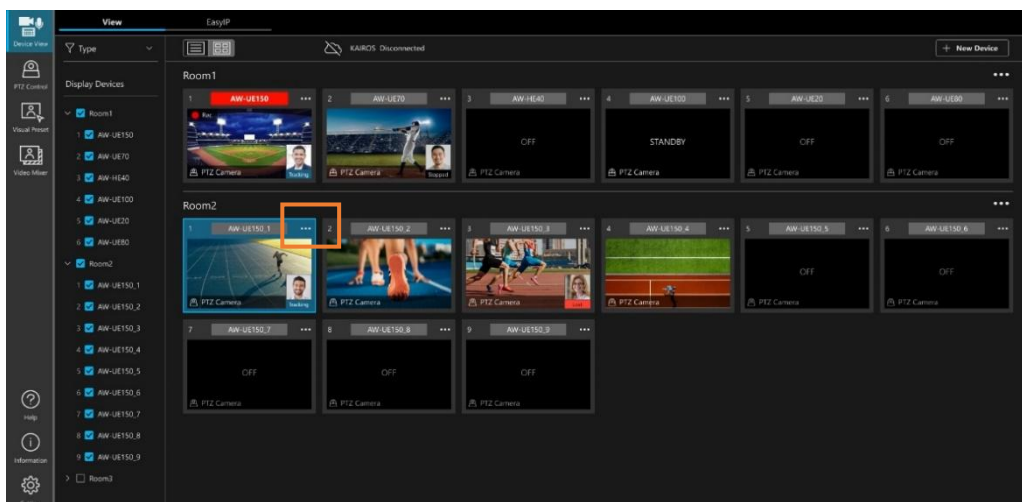


3. The device menu is displayed.

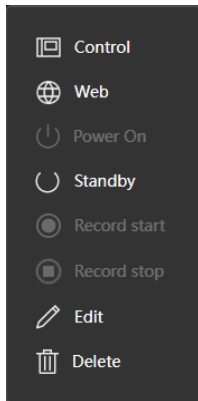

---

## Opening the Device Operation Screen

1. Display the device menu as described earlier in the section “[Displaying the Device Menu](#).”
2. Select [Control] from the device menu.

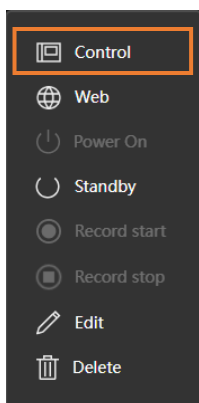

3. An operation screen is displayed according to the type of the device selected.

If the type of the device is remote camera, the PTZ Control function screen is displayed.


<NOTE>

- Some device types do not have an operation screen, so the screen may not change in some cases.

---

## Opening the Web Screen for a Device

1. Display the device menu as described earlier in the section “[Displaying the Device Menu](#).”
2. From the device menu, select [Web].

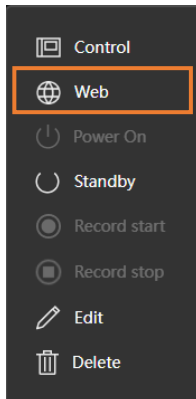

3. The web screen for the selected device is displayed in a web browser.


<NOTE>

- If a device does not have a web screen, the [Web] item is disabled and cannot be selected.

---

## Switching a Device ON

1. Display the device menu as described earlier in the section “[Displaying the Device Menu](#).”
2. From the device menu, select [Power On].

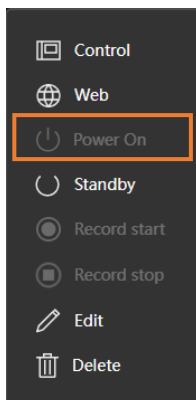

3. The selected device is switched ON.


<NOTE>

- If a device does not have a power management function, the [Power On] item is disabled and cannot be selected.
- Some device types allow you to specify the operations to be performed after a device is switched ON. For details, see “[Changing Device Information and Settings](#)“ in this section.

---

## Setting a Device to Standby

1. Display the device menu as described earlier in the section “[Displaying the Device Menu](#).”
2. From the device menu, select [Standby].

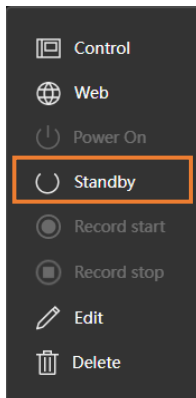

3. The selected device enters standby.


<NOTE>

- If a device does not have a power management function, the [Standby] item is disabled and cannot be selected.
- Some device types allow you to specify the operations to be performed before a device enters standby. For details, see “[Changing Device Information and Settings](#)” in this section.

---

## Start/Stop Video Recording by a Device

1. Display the device menu as described earlier in the section “[Displaying the Device Menu](#).”
2. From the device menu, select [Record start] to start recording video, and select [Record stop] to stop recording video.

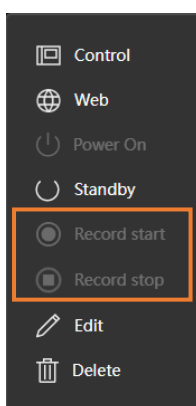


3. The selected device starts or stops recording video.

<NOTE>

- If a device does not have a video recording function, the [Record start] and [Record stop] items are disabled and cannot be selected.

## Changing Device Information and Settings

1. Display the device menu as described earlier in the section “[Displaying the Device Menu](#).”
2. From the device menu, select [Edit].

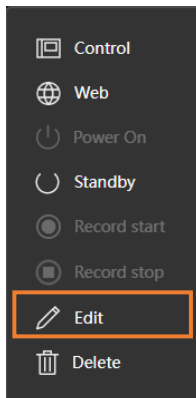

3. The device settings screen is displayed.

Make changes to the information and click the [OK] button to save them.

The 'Edit Device' screen has two tabs: 'Device Info' (selected, marked with a red circle 1) and 'Video Source'. Under 'Device Info', there are fields for: Group (Group1, marked with red circle 2), Type (PTZ Camera, marked with red circle 3), Name (AW-UE100, marked with red circle 4), IP Address (192.168.0.10, marked with red circle 5), Port No (80, marked with red circle 6), User Name (admin, marked with red circle 7), Password (masked with dots, marked with red circle 8), and Preset Color (a row of color swatches with 'Yellow' selected, marked with red circle 9). On the right, the 'Operation' section has two sub-sections: 'After Power ON' with options 'Facing the front' (selected, marked with red circle 10), 'Move to preset position' (Preset1), and 'Do nothing'; and 'Before Standby' with options 'Facing the front' (selected), 'Move to preset position' (Preset3), and 'Do nothing'. Below this is an 'Auto Tracking Setting' button (marked with red circle 11). At the bottom are 'OK' (marked with red circle 12) and 'Cancel' buttons.

### 1) Edit content switching tab

In the current version, only the [Device Info] tab (content shown in the screenshot above) is available.

### 2) Group

Select the group that a device belongs to.

### 3) Type

Display the type for the device.

### 4) Name

Specify the display name of the device.

### 5) IP Address

Display the IPv4 address of the device.

6) Port

Display the port number of the device.

7) User Name

Specify the account name for the device.

8) Password

Specify the password for the device.

9) Preset Color

Specify the color for the display of presets registered with the PTZ Control function of this software.

10) Operation

- After Power ON

Select the operation to be performed after a remote camera is switched ON with this software.

Facing the front: Point the camera forward.

Move to the preset position: Call the specified preset number.

Do nothing: Do not perform any actions.

- Before Standby

Select the operation to be performed before a remote camera enters standby when it is set to standby with this software.

Facing the front: Point the camera forward.

Move to the preset position: Call the specified preset number.

Do nothing: Do not perform any actions.

11) Auto Tracking Setting

The auto tracking setting screen will be displayed.

12) [OK]/[Cancel] button

Click the [OK] button to save the changes and close this screen.

Click the [Cancel] button to discard the changes and close this screen.


<NOTE>

- 3), 5) and 6) are only displayed and cannot be configured.
- 9) through 11) are only displayed when the type of the device is PTZ Camera.
- For details on the PTZ Control function, refer to the PTZ Control function operation manual. To display the PTZ Control function operation manual, click the [Help] button and select [PTZ Control] from the menu.

---

## Deleting a Device

1. Display the device menu as described earlier in the section “[Displaying the Device Menu](#).”
2. From the device menu, select [Delete].

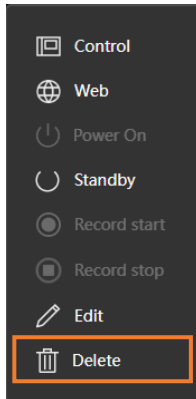

3. A message confirming that you wish to continue with deletion is displayed. Click the [OK] button to delete the selected device.



# Group Menu Operations

## Displaying the Group Menu


Operations on groups are performed from the group menu.

The group menu is displayed with the procedure below.

1. On the View screen, click the group menu display button to the right of the relevant group name.


- In list display

Click the [...] button to the right of the group name.

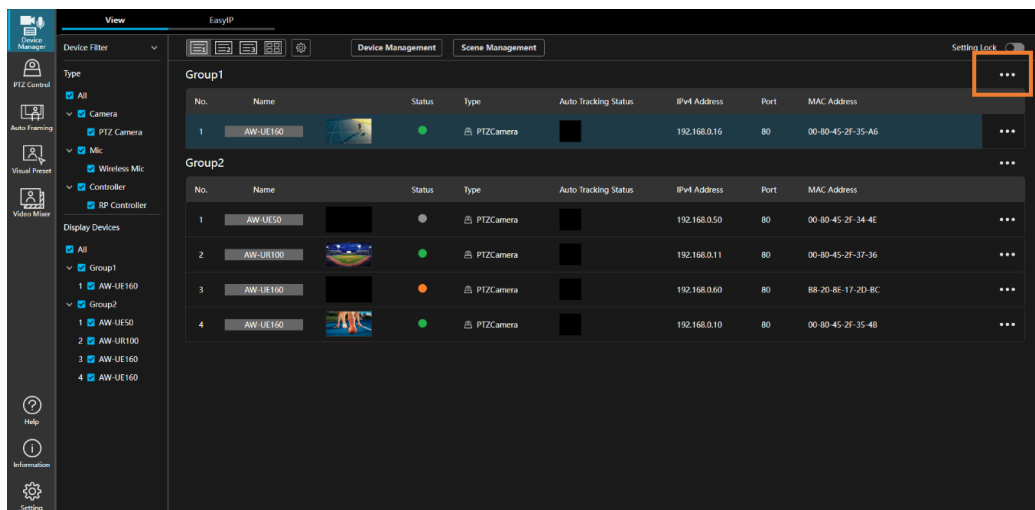


- In thumbnail display

Click the [...] button to the right of the group name.

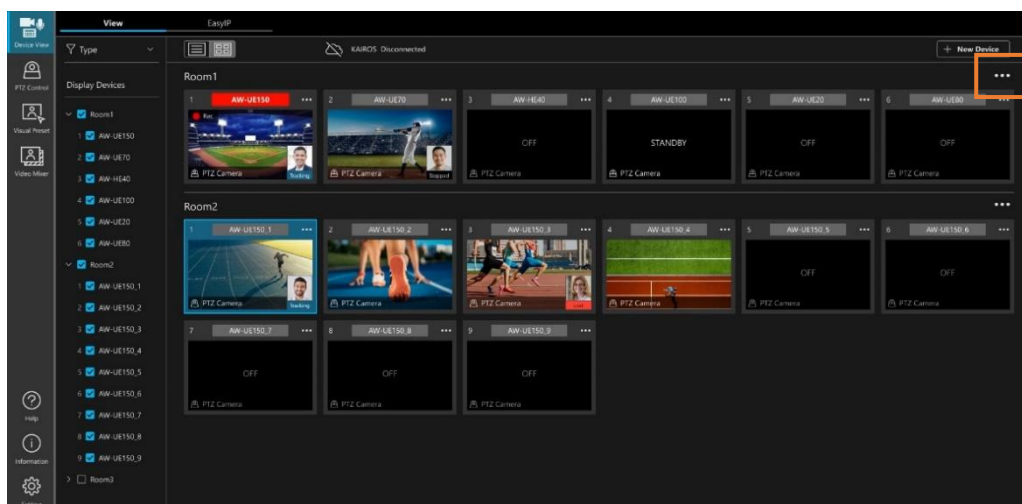


2. The group menu is displayed.

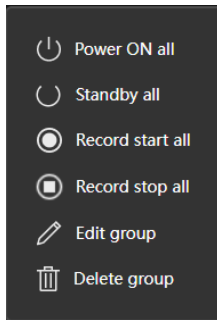

---

## Switching ON all Devices in a Group

1. Display the group menu as described earlier in the section “[Displaying the Group Menu](#).”
2. From the group menu, select [Power ON all].

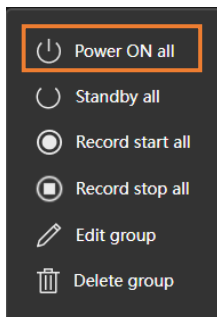

3. All Devices in the group are switched ON.


<NOTE>

- If there is a device without a power management function in the group, no operations are performed on the device.
- Some device types allow you to specify the operations to be performed after a device is switched ON. For details, see “[Changing Device Information and Settings](#)” in this section.

---

## Setting all Devices in a Group to Standby

1. Display the group menu as described earlier in the section “[Displaying the Group Menu](#).”
2. From the group menu, select [Standby all].

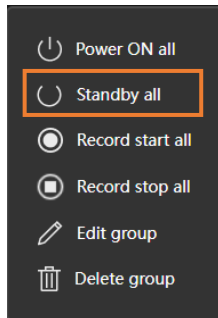

3. All devices in the group enter standby.


### <NOTE>

- If there is a device without a power management function in the group, no operations are performed on the device.
- Some device types allow you to specify the operations to be performed before a device enters standby. For details, see “[Changing Device Information and Settings](#)” in this section.

---

## Starting/Stopping Video Recording for all Devices in a Group

1. Display the group menu as described earlier in the section “[Displaying the Group Menu](#).”
2. From the group menu, select [Record start all] to start recording video, and select [Record stop all] to stop recording video.

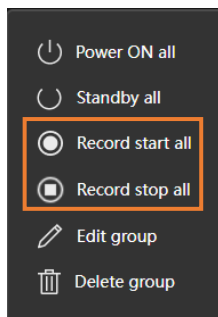


3. All devices in the group start/stop recording video.

### <NOTE>


- If there is a device without a video recording function in the group, no operations are performed on the device.

## Changing a Group Display Name

1. Display the group menu as described earlier in the section “[Displaying the Group Menu](#).”
2. From the group menu, select [Edit group].

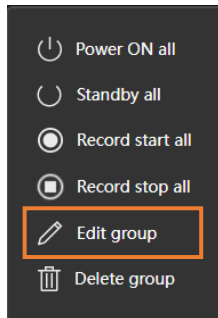

3. The group setting screen is displayed.  
Change the group display name in the [Group Name] field.

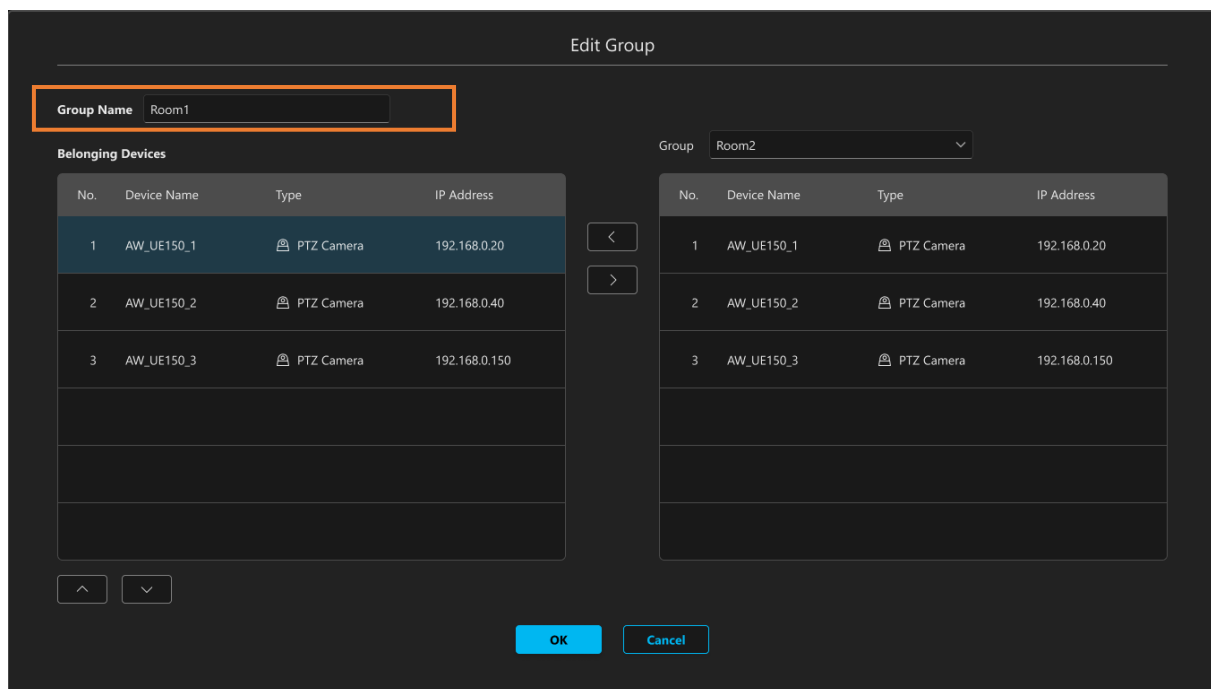The 'Edit Group' screen is shown with a dark background. At the top, the title 'Edit Group' is centered. Below it, the 'Group Name' field contains 'Room1' and is highlighted with an orange border. To the right, a 'Group' dropdown menu shows 'Room2'. Below these are two tables under the heading 'Belonging Devices'. Each table has columns for 'No.', 'Device Name', 'Type', and 'IP Address'. The first table on the left contains three rows of data for PTZ cameras. The second table on the right also contains three rows of data for PTZ cameras. Between the two tables are left and right arrow buttons. At the bottom left are up and down arrow buttons. At the bottom center are 'OK' and 'Cancel' buttons.


| No. | Device Name | Type       | IP Address    |
|-----|-------------|------------|---------------|
| 1   | AW_UE150_1  | PTZ Camera | 192.168.0.20  |
| 2   | AW_UE150_2  | PTZ Camera | 192.168.0.40  |
| 3   | AW_UE150_3  | PTZ Camera | 192.168.0.150 |

| No. | Device Name | Type       | IP Address    |
|-----|-------------|------------|---------------|
| 1   | AW_UE150_1  | PTZ Camera | 192.168.0.20  |
| 2   | AW_UE150_2  | PTZ Camera | 192.168.0.40  |
| 3   | AW_UE150_3  | PTZ Camera | 192.168.0.150 |

4. Click the [OK] button to save the changes.

## Changing the Device Display Order in a Group


1. Display the group menu as described earlier in the section “[Displaying the Group Menu](#).”
2. From the group menu, select [Edit group].

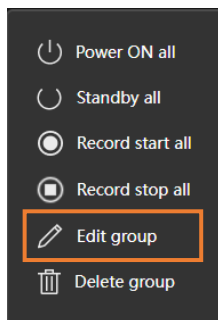

3. The group setting screen is displayed.

The [Belonging Devices] area shows a list of devices that belong to the relevant group.

Select a device in the [Belonging Devices] area, and then click the up and down buttons beneath the [Belonging Devices] field to change the display order of devices.

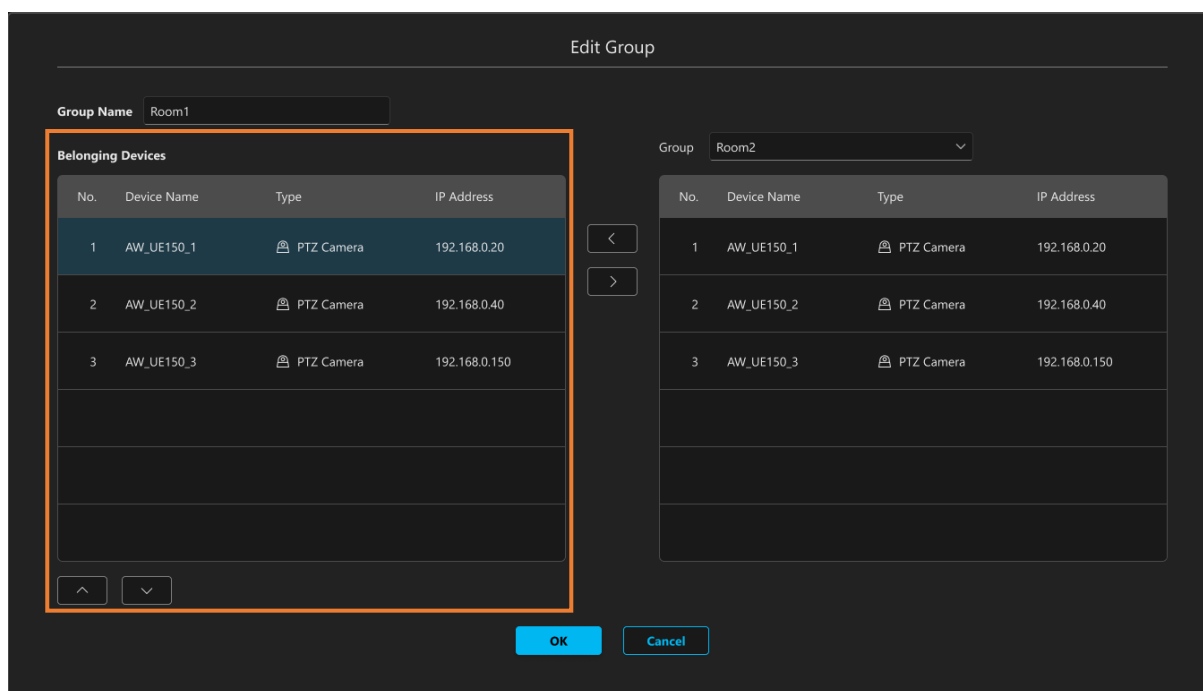


4. Click the [OK] button to save the changes.

### <NOTE>

You can also change the order of device display by dragging and dropping devices in the list view.

## Moving Devices in a Group to Another Group


1. Display the group menu as described earlier in the section “[Displaying the Group Menu](#).”
2. From the group menu, select [Edit group].

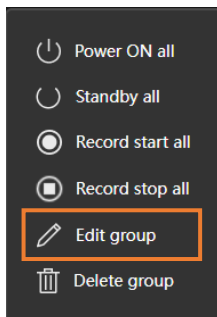

3. The group setting screen is displayed.

The [Belonging Devices] area shows a list of devices that belong to the relevant group.

The [Group] area on the right of the screen displays the devices that belong to the group selected in the drop down list.

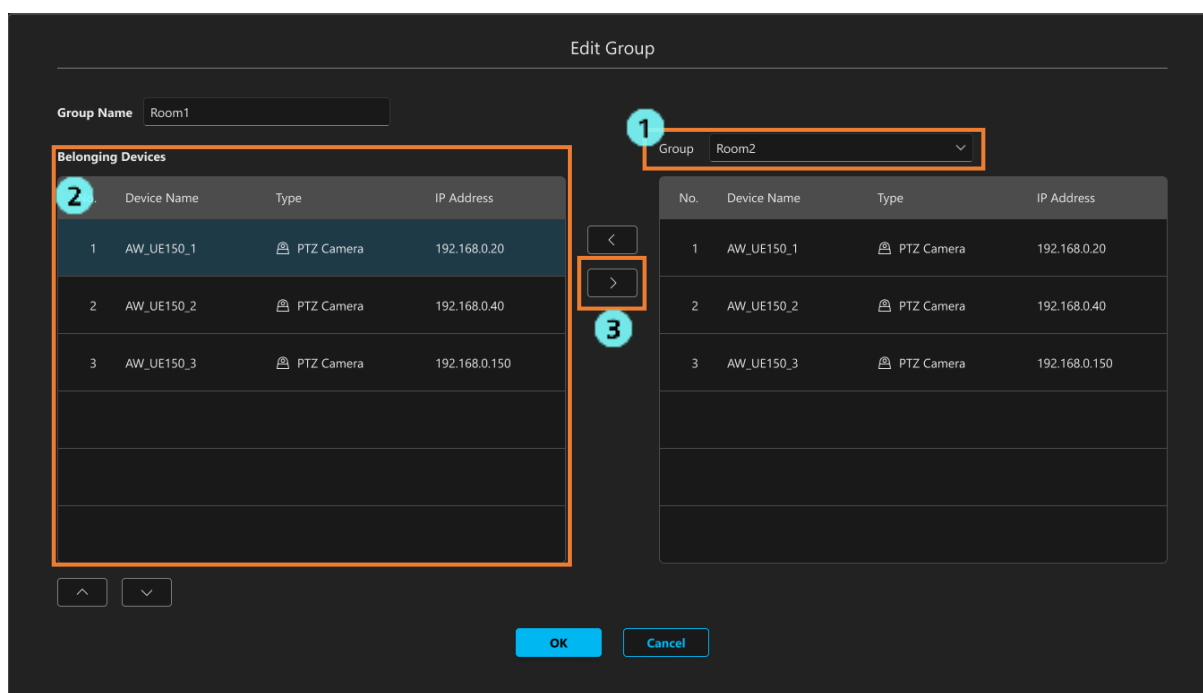

You can move devices with the operations below.

- 1) Select the group to which a device is to be moved from the drop down list next to [Group].
- 2) In the [Belonging Devices] area, select the device that you wish to move.
- 3) Click the [>] button in the center of the settings screen to move the device to the group selected in the drop down list next to [Group].

### <NOTE>


- Selecting a device in the [Group] area and clicking the [<] button in the center of the settings screen allows you to move the device from the [Group] area to the [Belonging Devices] area.

4. Click the [OK] button to save the changes.

---

## Deleting a Group

1. Display the group menu as described earlier in the section “[Displaying the Group Menu](#).”
2. From the group menu, select [Delete group].

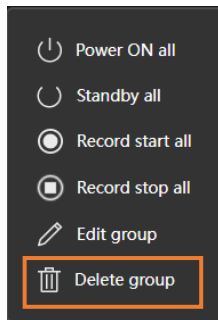

3. A message confirming that you wish to continue with deletion is displayed. Click [OK] to delete the selected group and all devices that belong to the group.

# Built-in EasyIP Setup Tool Plus Functionality

---

## Main Functions

1. Device detection/information display

This function detects devices that support EasyIP on a network. It can also display settings information for a device, such as MAC address and IPv4 address.

2. Identify

In the case of a remote camera, it can make the power light of the specified camera flash rapidly.

3. Network Settings

This function enables you to change the network settings information for a specified device.

4. Web GUI

This function enables you to switch to the web screen of a specified device.

5. Auto IP

This function enables you to allocate consecutive IP addresses to specified devices.

6. Administrator Registration

This function enables you to register an administrator account for a specified device.

7. Firmware Update

This function enables you to update the firmware version of connected devices.

8. Activation

This function enables you to activate different types of paid licenses.


### <NOTE>

- When the device is a Box Style Camera AW-UB10 or AW-UB50, only the Network Settings function and Administrator Registration function are available.



# Screen Explanation

## Main Screen

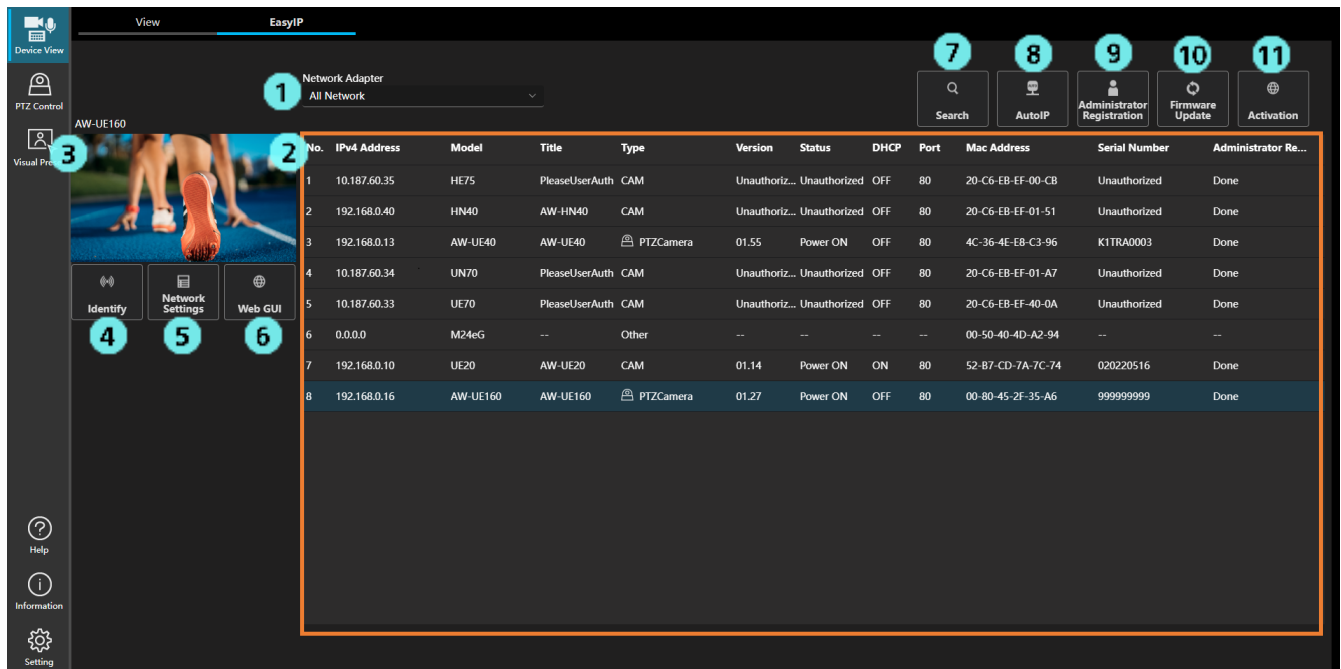

### 1. Network selection

This enables you to specify the network to be used in a search.

### 2. Device list display

This shows a list of devices detected by searching the network.

### 3. Camera video display

In the case of a remote camera, video from a specified camera can be displayed here.

\*If the camera's user authentication is ON, no video can be acquired.

### 4. Identify

In the case of a remote camera, this can make the power light of the specified camera flash rapidly.

### 5. Network Settings

This enables you to change the network settings information for a specified device.

### 6. Web GUI

This enables you to display the web screen of a specified device.

### 7. Search

This performs a search for and detects devices on the network.

### 8. Auto IP

This enables you to allocate consecutive IP addresses to specified devices.

### 9. Administrator Registration

This enables you to register an administrator account for a specified device.

### 10. Firmware Update

This enables you to update the firmware of a specified device.

### 11. Activation

This enables you to activate different types of paid licenses.

## Device List Display

- IPv4 Address

Indicates the IPv4 address of a device.

You can switch the order of the device list into ascending or descending order of IPv4 address by clicking [IPv4 Address].

- Model

Indicates the model of a device.

You can rearrange the device list so that the devices shown are organized by model by clicking [Model].

- Title

Indicates the title of a device.

You can switch the order of the device list into ascending or descending order of title by clicking [Title].

- Category

Indicates the category of a device.

In the case of a camera, “CAM” is displayed.

You can rearrange the device list so that the devices shown are organized by category by clicking [Category].

- FW Version

Indicates the firmware version of the device.

\*If the device’s user authentication is ON, no information can be acquired.

- Status

Indicates the status of the device.

PowerON: Power is ON    Standby: Device is on standby

\*If the device’s user authentication is ON, no information can be acquired.

You can rearrange the device list so that the devices shown are organized by status by clicking [Status].

- DHCP

Displays the network settings information for a device.

ON: DHCP allocation    OFF: Fixed IP allocation

You can rearrange the device list so that the devices shown are organized by DHCP by clicking [DHCP].

- Port

Indicates the port number of the device.

You can switch the order of the device list into ascending or descending order of port number by clicking [Port].

- MAC Address

Indicates the MAC address of a device.

- Serial Number

Indicates the serial number of the device.

\*If the device's user authentication is ON, no information can be acquired.

- Administrator Registration

Displays the settings information for the administrator account.

Done: Configured    None: Not yet configured

You can rearrange the device list so that the devices shown are organized by administrator registration by clicking [Administrator Registration].

- IPv6 Address

Indicates the IPv6 address of a device.

You can switch the order of the device list into ascending or descending order of IPv6 Address by clicking [IPv6 Address].

- Switch to web screen

Double click to switch to the web screen of a specified device.

<NOTE>

- Messages displayed when information cannot be obtained

Unsupported: This device does not support the acquisition of information.

Unauthorized: No information can be acquired because the device's user authentication is ON.

--: Operation of this device is not supported.

---

## Identify Function

This function makes the power light of the specified remote camera flash rapidly.

### How to use this function

1. Select a camera from the device list.
2. Click the [Identify] button.
3. The power light of the camera flashes rapidly.

### <NOTE>

- The Identify function cannot be used with any camera once 20 minutes have elapsed since it was switched on.  
If you wish to use this function after 20 minutes have elapsed, in the camera network settings, set [Easy IP Setup accommodate period] to "Unlimited."

---

## Network Settings Function


This function enables you to change the network settings information for a specified device.

How to use this function

\*The type of display depends on the model of device.

- Display type (1)

This enables you to configure device title, port number, IPv4, IPv6, and DNS settings.

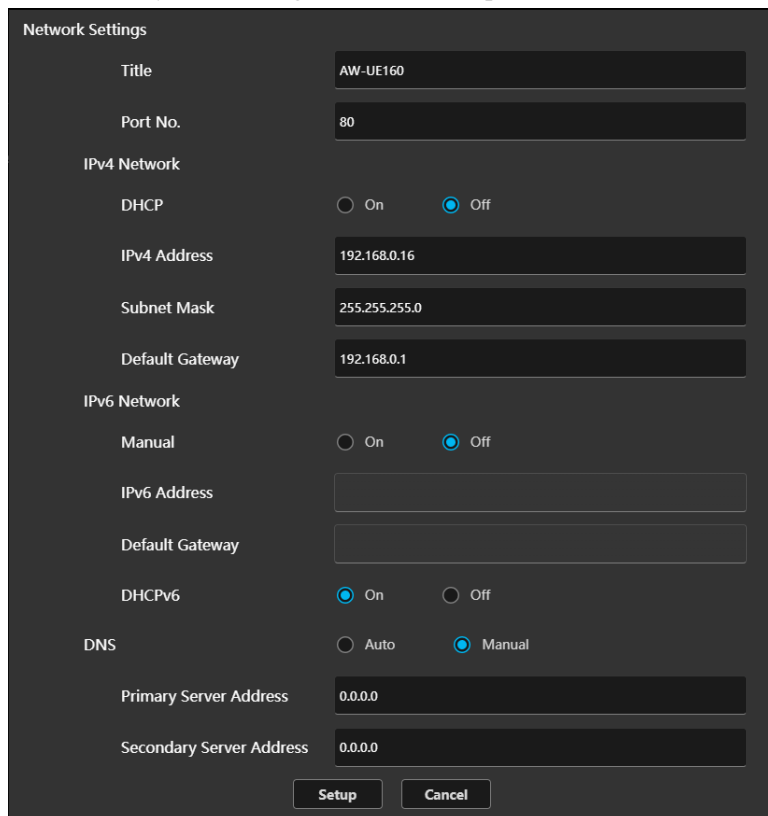


The screenshot shows a 'Network Settings' window with the following fields and options:

- Title:** Text field containing 'AW-UE160'.
- Port No.:** Text field containing '80'.
- IPv4 Network:**
  - DHCP:** Radio buttons for 'On' and 'Off'. 'Off' is selected.
  - IPv4 Address:** Text field containing '192.168.0.16'.
  - Subnet Mask:** Text field containing '255.255.255.0'.
  - Default Gateway:** Text field containing '192.168.0.1'.
- IPv6 Network:**
  - Manual:** Radio buttons for 'On' and 'Off'. 'Off' is selected.
  - IPv6 Address:** Empty text field.
  - Default Gateway:** Empty text field.
  - DHCPv6:** Radio buttons for 'On' and 'Off'. 'On' is selected.
- DNS:**
  - Auto:** Radio buttons for 'Auto' and 'Manual'. 'Manual' is selected.
  - Primary Server Address:** Text field containing '0.0.0.0'.
  - Secondary Server Address:** Text field containing '0.0.0.0'.

At the bottom are 'Setup' and 'Cancel' buttons.

1. Modify the network settings information.
2. Click the [Setup] button to start configuration.
3. Enter the user ID and password for the device.

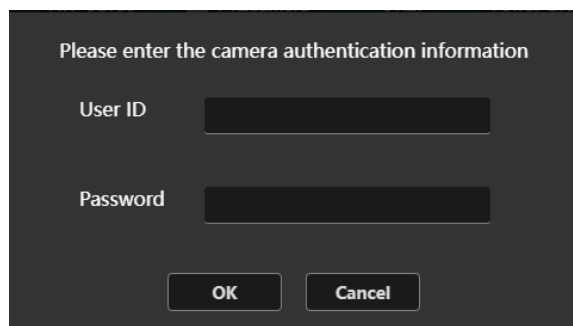

The screenshot shows a dialog box titled 'Please enter the camera authentication information' with the following fields and buttons:


- User ID:** Text field.
- Password:** Text field.
- OK:** Button.
- Cancel:** Button.

4. If configuration is successful, "Setup Camera Successfully" is displayed.
5. If configuration is unsuccessful, "Fail to Setup Camera" is displayed.

- Display type (2)

This enables you to configure port number, IPv4, and DNS settings.

\*Device title cannot be configured.

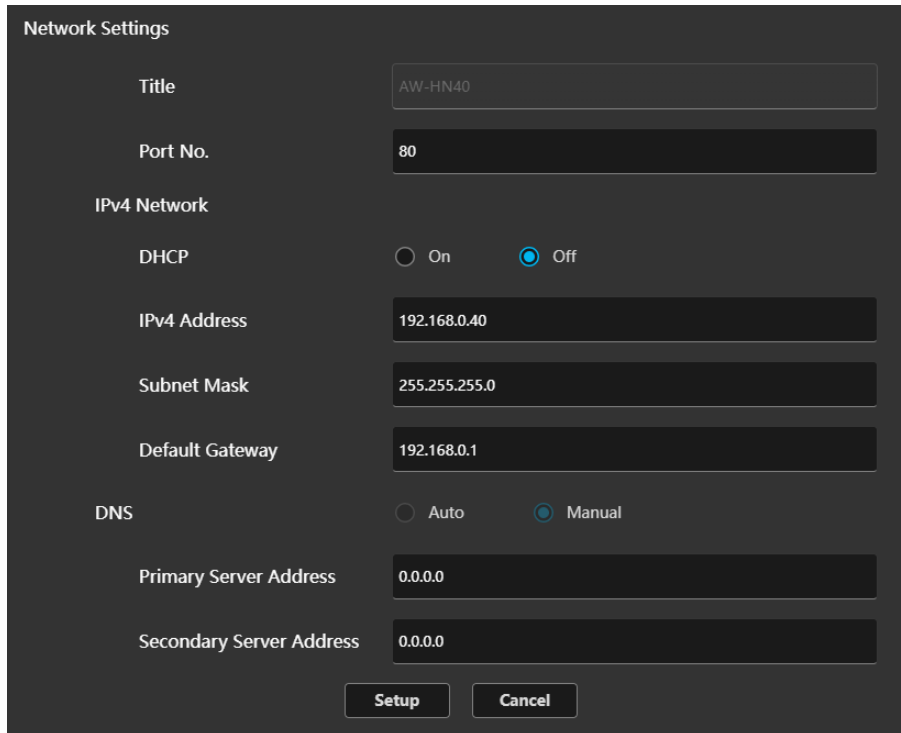

The screenshot shows a 'Network Settings' window with a dark theme. It contains several input fields and radio buttons for configuring network parameters. The 'Title' field is disabled and shows 'AW-HN40'. The 'Port No.' field is set to '80'. Under the 'IPv4 Network' section, the 'DHCP' radio button is selected 'Off'. The 'IPv4 Address' is '192.168.0.40', 'Subnet Mask' is '255.255.255.0', and 'Default Gateway' is '192.168.0.1'. Under the 'DNS' section, the 'Manual' radio button is selected. The 'Primary Server Address' and 'Secondary Server Address' are both '0.0.0.0'. At the bottom are 'Setup' and 'Cancel' buttons.

| Field                    | Value         |
|--------------------------|---------------|
| Title                    | AW-HN40       |
| Port No.                 | 80            |
| IPv4 Network             |               |
| DHCP                     | Off           |
| IPv4 Address             | 192.168.0.40  |
| Subnet Mask              | 255.255.255.0 |
| Default Gateway          | 192.168.0.1   |
| DNS                      |               |
| Primary Server Address   | 0.0.0.0       |
| Secondary Server Address | 0.0.0.0       |

1. Modify the network settings information.
2. Click the [Setup] button to start configuration.
3. If configuration is successful, "Setup Camera Successfully" is displayed.
4. If configuration is unsuccessful, "Fail to Setup Camera" is displayed.

<NOTE>

- The Identify function cannot be used with any device once 20 minutes have elapsed since it was switched on.

If you wish to use this function after 20 minutes have elapsed, in the device network settings, set [Easy IP Setup accommodate period] to "Unlimited."

## Auto IP Function

This enables you to allocate consecutive IP addresses to specified devices.

It also enables you to switch DHCP settings in batches.

Auto IP

All Network

| <input type="checkbox"/> | N... | IPv4 Address | Model    | Title    | Type      | Version   | Status      | DH... | Port | Mac Address       |
|--------------------------|------|--------------|----------|----------|-----------|-----------|-------------|-------|------|-------------------|
| <input type="checkbox"/> | 1    | 192.168.0.40 | HN40     | AW-HN40  | CAM       | Unauth... | Unauthor... | OFF   | 80   | 20-C6-EB-EF-01-51 |
| <input type="checkbox"/> | 2    | 192.168.0.16 | AW-UE160 | AW-UE160 | PTZCamera | 01.27     | Power ON    | OFF   | 80   | 00-80-45-2F-35-A6 |
| <input type="checkbox"/> | 3    | 192.168.0.13 | AW-UE40  | AW-UE40  | PTZCamera | 01.55     | Power ON    | OFF   | 80   | 4C-36-4E-E8-C3-96 |
| <input type="checkbox"/> | 4    | 192.168.0.10 | UE20     | AW-UE20  | CAM       | 01.14     | Power ON    | ON    | 80   | 52-B7-CD-7A-7C-74 |

DHCP ☐ On ☒ Off

Auto IP Start Address

Option ^

Subnet Mask

Default Gateway

Port No.

DNS ☐ Auto ☒ Manual

Primary Server Address

Secondary Server Address

How to use this function

1. Check the checkbox next to the device(s) you wish to configure. \*You can select multiple devices.
2. Select DHCP [On]/[Off].
3. Enter the address in [Auto IP Start Address].

- If DHCP is [Off]

Enter the starting address for IP address allocation in [Auto IP Start Address].

Ex) In the case of 192.168.0.10, IP addresses will be allocated in the following order starting from the top of the list.

192.168.0.10, 192.168.0.11, 192.168.0.12...

\* Subnet mask, default gateway, port number, and DNS can be optionally configured under [Option]. If an optional setting is configured, this will be applied to all devices.

- If DHCP is [On]

No address can be entered in [Auto IP Start Address] if DHCP is set to [On] for the device.

4. Click the [Setup] button to begin configuring settings, starting from the top of the list.
5. If configuration is successful, a list of successfully configured devices is displayed.
6. If configuration is unsuccessful, a list of devices for which configuration failed is displayed.

<NOTE>

- The Identify function cannot be used with any device once 20 minutes have elapsed since it was switched on.

If you wish to use this function after 20 minutes have elapsed, in the camera network settings, set [Easy IP Setup accommodate period] to "Unlimited."



## Administrator Registration Function

This function enables you to register an administrator account for a device.

The device list only shows devices for which no administrator account is registered.

Administrator Registration

| <input type="checkbox"/> | No. | IPv4 Address | Model    | Title    | Type      | Version | Status   | DHCP | Port | Mac Address       |
|--------------------------|-----|--------------|----------|----------|-----------|---------|----------|------|------|-------------------|
| <input type="checkbox"/> | 1   | 192.168.0.10 | AW-UE160 | AW-UE160 | PTZCamera | 01.27   | Power ON | OFF  | 80   | 00-80-45-2F-35-A6 |
|                          |     |              |          |          |           |         |          |      |      |                   |

User ID

Password

Password(Confirm)

Note

- User name can be set from 1 to 32 characters.
- Password can be set from 4 to 32 characters. ( 8 or more characters recommended )
- Distinguish between upper and lower cases.
- For the password, it is recommend to use three or more types of characters from the following.
  - upper case alphabetic
  - lower case alphabetic
  - numbers
  - symbols(!#\$% '()\*+,-./?:@[]^\_`~)
- Set the password which does not include the user name.
- It is recommended to change the password periodically.

Setup

Cancel

How to use this function

1. Check the checkbox of the device(s) for which an administrator account is to be registered.
  - \*You can select multiple devices.
  - \*Settings cannot be configured if there are any devices that have the same IP address.  
Change the IP address of the device by using the Network Settings or Auto IP function.
2. Enter a user name and password.
3. Click the [Setup] button to begin registration.
4. If registration is successful, a list of successfully registered devices is displayed.
5. If registration is unsuccessful, a list of devices for which registration failed is displayed.

<NOTE>

- It is not possible to register an administrator account if a device already has a registered administrator account.

## Firmware Update Function

This function enables you to update the firmware version of connected devices.

The screenshot shows the 'Firmware Update' window. At the top, there are radio buttons for 'Auto' (selected) and 'Manual'. Below is a table with columns: No., IPv4 Address, Model, Title, Version, Latest Version, Mac Address, User ID, Password, and Firmware File. The first row shows device 1 with IP 192.168.0.10, model UE20, title AW-UE20, version 01.14, and latest version 01.22 (highlighted in red). The User ID, Password, and Firmware File fields are empty, with a 'Select' button next to the Firmware File field. Below the table is a 'Batch Input' section with fields for User ID, Password, and Firmware File, each with 'Input' and 'Delete' buttons. At the bottom are 'Setup' and 'Cancel' buttons.

| No. | IPv4 Address | Model | Title   | Version | Latest Version | Mac Address       | User ID | Password | Firmware File |
|-----|--------------|-------|---------|---------|----------------|-------------------|---------|----------|---------------|
| 1   | 192.168.0.10 | UE20  | AW-UE20 | 01.14   | 01.22          | 52-B7-CD-7A-7C-74 |         |          |               |

The [Latest Version] field indicates the latest firmware version for the device.

This is only displayed when the server PC is connected to the internet.

How to use this function

- Update Method: Auto

This screenshot is identical to the one above, showing the 'Firmware Update' window with the 'Auto' update method selected. The table lists one device (No. 1) with a 'Latest Version' of 01.22. The 'Batch Input' section at the bottom contains fields for User ID, Password, and Firmware File, each with 'Input' and 'Delete' buttons, and 'Setup' and 'Cancel' buttons at the very bottom.

The app performs everything from firmware file download to device firmware version update. The device list only shows devices that need to be updated to the latest version of firmware.

\*In order to use auto update, the server PC must be connected to the internet.

## Version update procedure

1. Check the checkbox of the device(s) for which version update is to be started.

\* You can select multiple devices.

\* Update cannot be processed if there are any devices that have the same IP address.

Change the IP address of the device by using the Network Settings or Auto IP function.

2. Enter the user ID and password for each device.

Batch input: Enter values in the [Batch Input] area and press the [Input] button.

You can enter the user ID and password for the selected devices.

Press delete to clear the user ID and password for the selected devices.

Individual input: Enter the user ID and password for each device.

3. Press the [Update] button to start updating the firmware to the latest version.

\*Once version update is started, you cannot perform any other operations with the EasyIP function.

4. If version update is completed successfully, a list of successfully updated devices is displayed.

5. If version update is unsuccessful, a list of devices for which update failed is displayed.

### • Update Method: Manual

The screenshot shows the 'Firmware Update' window with the 'Manual' update method selected. It contains a table of devices with columns for selection, number, IP address, model, title, version, latest version, MAC address, user ID, password, and firmware file. Below the table is a 'Batch Input' section with fields for user ID, password, and firmware file, along with 'Input', 'Delete', 'Setup', and 'Cancel' buttons.

| <input type="checkbox"/> | No. | IPv4 Address | Model    | Title          | Version | Latest Version | Mac Address       | User ID | Password | Firmware File  |
|--------------------------|-----|--------------|----------|----------------|---------|----------------|-------------------|---------|----------|--|
| <input type="checkbox"/> | 1   | 192.168.0.16 | AW-UE160 | AW-UE160       | 01.27   | 01.27          | 00-80-45-2F-35-A6 |         |          | <input type="text"/> <input type="button" value="Select"/> |
| <input type="checkbox"/> | 2   | 10.187.60.33 | UE70     | PleaseUserAuth | --      | 02.10          | 20-C6-EB-EF-40-0A |         |          | <input type="text"/> <input type="button" value="Select"/> |
| <input type="checkbox"/> | 3   | 192.168.0.40 | HN40     | AW-HN40        | --      | 02.10          | 20-C6-EB-EF-01-51 |         |          | <input type="text"/> <input type="button" value="Select"/> |
| <input type="checkbox"/> | 4   | 10.187.60.35 | HE75     | PleaseUserAuth | --      | 02.10          | 20-C6-EB-EF-00-CB |         |          | <input type="text"/> <input type="button" value="Select"/> |
| <input type="checkbox"/> | 5   | 10.187.60.34 | UN70     | PleaseUserAuth | --      | 02.10          | 20-C6-EB-EF-01-A7 |         |          | <input type="text"/> <input type="button" value="Select"/> |
| <input type="checkbox"/> | 6   | 192.168.0.13 | AW-UE40  | AW-UE40        | 01.65   | 01.55          | 4C-36-4E-E8-C3-96 |         |          | <input type="text"/> <input type="button" value="Select"/> |
| <input type="checkbox"/> | 7   | 192.168.0.10 | UE20     | AW-UE20        | --      | 01.22          | 52-B7-CD-7A-7C-74 |         |          | <input type="text"/> <input type="button" value="Select"/> |

Batch Input

User ID:  Password:    Firmware File:

Manually updating firmware involves selecting the firmware file on the PC and running the update.

The device list only shows devices for which firmware can be updated.

## Notes

- The procedure for version update needs to be performed on a Windows PC. It cannot be performed on a Mac or iPad.
- When performing an update from a client PC, a tool for client PC must be installed on the PC in advance.

Please download and install it from our website ([https://www.pass.panasonic.co.jp/pro-av/support/content/download/EN/ep2main/mps\\_client\\_tool\\_e.htm](https://www.pass.panasonic.co.jp/pro-av/support/content/download/EN/ep2main/mps_client_tool_e.htm)).

## Version update procedure

1. Check the checkbox of the device(s) for which version update is to be started.

\* You can select multiple devices.

\* Update cannot be processed if there are any devices that have the same IP address.

Change the IP address of the device by using the Network Settings or Auto IP function.

2. Enter the user ID and password for each device.

Batch input: Enter values in the [Batch Input] area and press the [Input] button.

You can enter the user ID and password for the selected devices.

Press delete to clear the user ID and password for the selected devices.

Individual input: Enter the user ID and password for each device.

3. Select the firmware file.

Batch input: Click the [Select] button in the Batch Input area and a message confirming that you wish to open the tool for firmware update will be displayed. Select [Open]. The tool for firmware update will start. Then, click the [Input] button → select a firmware file → click the [Upload] button.

The selected firmware file will appear in the field on the GUI after performing the upload.

Next, press the [Input] button to enter the firmware file for the selected device.

Press the [Delete] button to clear the firmware file for the selected device.

Individual input: Click the [Select] button for a device in the device display list and a message confirming that you wish to open a tool for firmware update will be displayed. Select [Open]. The tool for firmware update will start. Then, click the [Input] button → select a firmware file → click the [Upload] button.

The selected firmware file will appear in the field on the GUI after performing the upload.

4. Press the [Update] button to start updating the firmware of the selected device.

\*Once version update is started, you cannot perform any other operations with the EasyIP function.

5. If version update is completed successfully, a list of successfully updated devices is displayed.
6. If version update is unsuccessful, a list of devices for which update failed is displayed.

# Activation Function

This function enables you to activate paid licenses for devices.  
\*This function can only be used when the server PC is connected to the internet.

This function enables you to activate the following licenses.

- NDI|HX
- MoIP (SMPTE ST 2110)

## ■NDI|HX license activation

Select [NDI|HX] in the license selection box in the top left of the Activation screen to display the NDI|HX license activation screen.

Activation

NDI|HX

| <input type="checkbox"/> | No. | IPv4 Address | Model   | Title          | Version       | NDI HX Support | Activation Status | License Code |
|--------------------------|-----|--------------|---------|----------------|---------------|----------------|-------------------|--------------|
| <input type="checkbox"/> | 1   | 10.187.60.33 | UE70    | PleaseUserAuth | Unauthoriz... | False          | -                 |              |
| <input type="checkbox"/> | 2   | 192.168.0.40 | HN40    | AW-HN40        | Unauthoriz... | False          | -                 |              |
| <input type="checkbox"/> | 3   | 10.187.60.35 | HE75    | PleaseUserAuth | Unauthoriz... | False          | -                 |              |
| <input type="checkbox"/> | 4   | 192.168.0.13 | AW-UE40 | AW-UE40        | 01.55         | True           | Not Yet           |              |
| <input type="checkbox"/> | 5   | 192.168.0.10 | UE20    | AW-UE20        | 01.14         | False          | -                 |              |
| <input type="checkbox"/> | 6   | 10.187.60.34 | UN70    | PleaseUserAuth | Unauthoriz... | False          | -                 |              |

Activate

Deactivate

Cancel

NDI|HX Support: The device supports NDI|HX: True  
The devices do not support NDI|HX: False  
Activation Status: Device activation is complete: Done  
Device activation is not complete: Not Yet

## Activation procedure

1. Select the device that you wish to activate.
2. Enter the license code in the [License Code] field.
3. Press the [Activate] button to start activation.

## Deactivation procedure

1. Select the device that you wish to deactivate.
2. Enter the license code in the [License Code] field.
3. Press the [Deactivate] button to start deactivation.

## ■MoIP (SMPTE ST 2110) license activation

Select [MoIP] in the license selection box in the top left of the Activation screen to display the MoIP (SMPTE ST 2110) license activation screen.

**Activation**

MoIP Organization Panasonic MEBD Country JAPAN

| No. | IPv4 Address | Model    | Title          | Version      | MoIP Support | Activation Status | User ID | Password | Key Code |
|-----|--------------|----------|----------------|--------------|--------------|-------------------|---------|----------|----------|
| 1   | 10.187.60.33 | UE70     | PleaseUserAuth | Unauthorized | False        | -                 |         |          | - - - -  |
| 2   | 192.168.0.40 | HN40     | AW-HN40        | Unauthorized | False        | -                 |         |          | - - - -  |
| 3   | 192.168.0.16 | AW-UE160 | AW-UE160       | 01.27        | True         | Done              |         |          | - - - -  |
| 4   | 10.187.60.35 | HE75     | PleaseUserAuth | Unauthorized | False        | -                 |         |          | - - - -  |
| 5   | 192.168.0.13 | AW-UE40  | AW-UE40        | 01.55        | False        | -                 |         |          | - - - -  |
| 6   | 192.168.0.10 | UE20     | AW-UE20        | 01.14        | False        | -                 |         |          | - - - -  |
| 7   | 10.187.60.34 | UN70     | PleaseUserAuth | Unauthorized | False        | -                 |         |          | - - - -  |
| 8   | 0.0.0.0      | M24eG    | --             | --           | False        | -                 |         |          | - - - -  |

**Batch Input**

User ID: Password: Input Delete

Activate Deactivate Cancel

MoIP Support: The device supports MoIP: True

The devices do not support MoIP: False

Activation Status: Device activation is complete: Done

Device activation is not complete: Not Yet

### Activation procedure

1. Enter the company name in the [Organization] field.

Characters available: Alphanumeric characters, single-byte space

Maximum number of characters: 40

2. Select the country in the [Country] field.

3. Select the device you wish to activate.

4. Enter the user ID and password for the device.

Batch input: Enter values in the [Batch Input] area and press the [Input] button.

You can enter the user ID and password for the selected devices.

Press delete to clear the user ID and password for the selected devices.

Individual input: Enter the user ID and password for each device.

5. Enter the license key code in the [Key Code] field.

6. Press the [Activate] button to start activation.

### Deactivation procedure

1. Enter the company name in the [Organization] field.

Characters available: Alphanumeric characters, single-byte space

Maximum number of characters: 40

2. Select the country in the [Country] field.

3. Select the device that you wish to deactivate.

4. Enter the user ID and password.

Batch input: Enter values in the [Batch Input] area and press the [Input] button.

You can enter the user ID and password for the selected devices.

Press delete to clear the user ID and password for the selected devices.

Individual input: Enter the user ID and password for each device.

5. Enter the license key code in the [Key Code] field.


6. Press the [Deactivate] button to start deactivation.

## Selecting Items to Display in the Device List


The items to be displayed in the device list can be selected on the Setting screen.

You can select the items with the following procedure.

1. Click the [Setting] button in the function selection area to display the Setting screen.

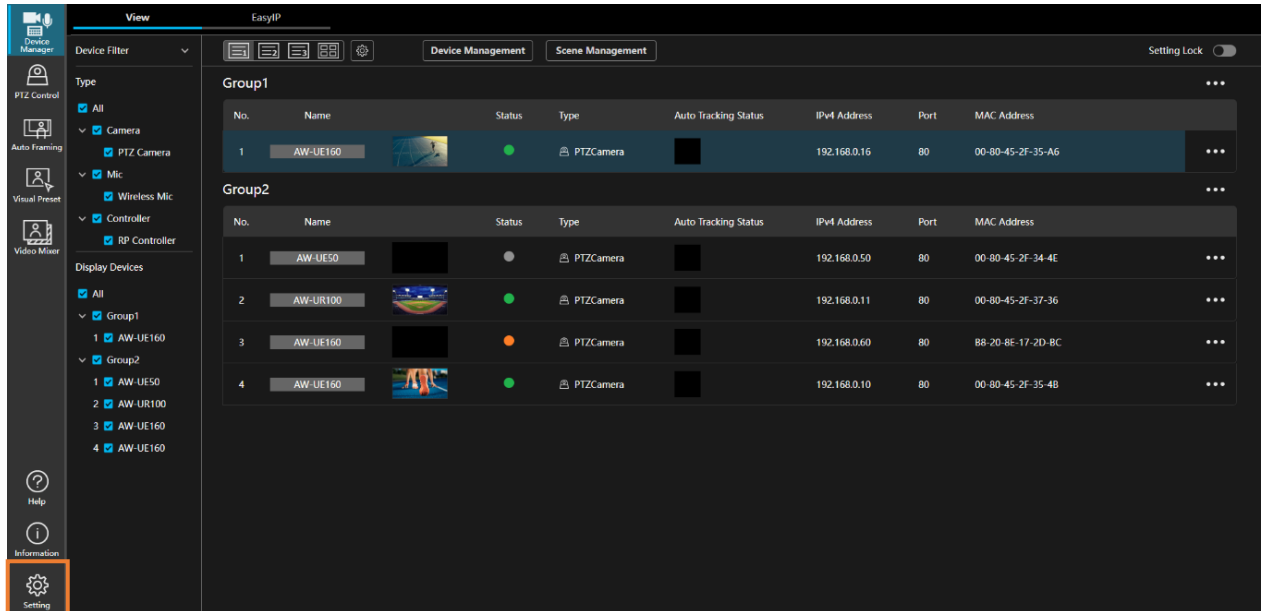

2. On the Setting screen, click [Device Manager] to display the Device Manager function settings screen, and then click the [EasyIP] tab.

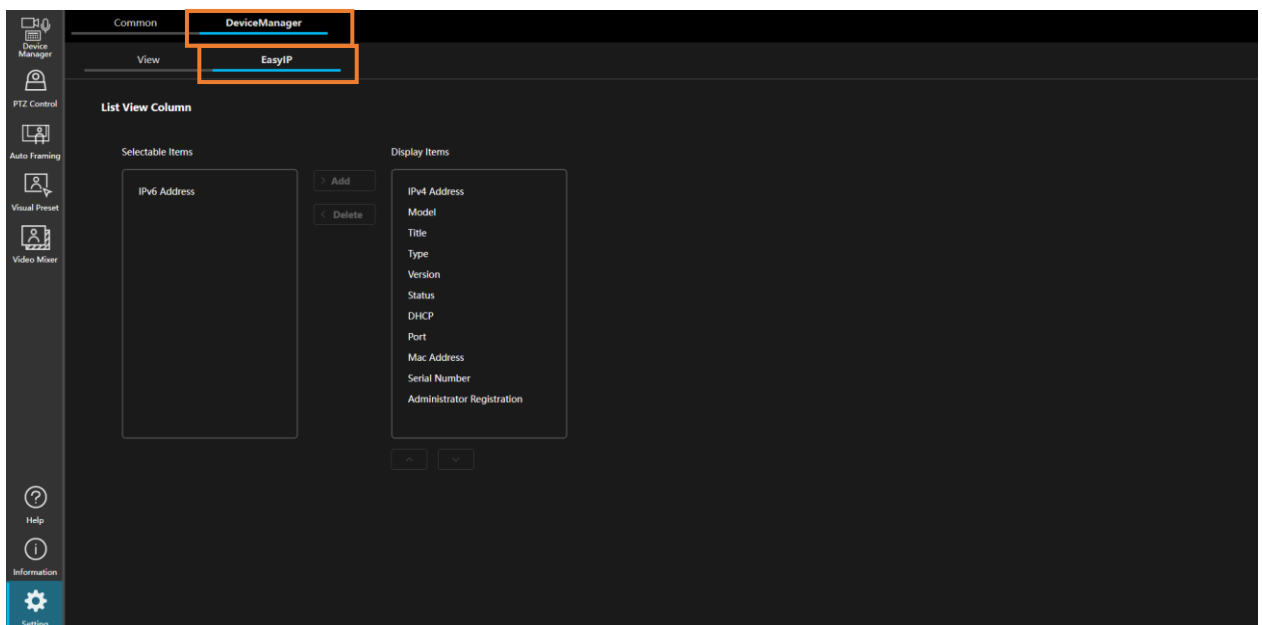

3. If you wish to show an item that is hidden, select the relevant item from [Selectable Items] and then click the [> Add] button. The item will move to [Display Items] and will be shown.

If you wish to hide an item that is shown, select the relevant item from [Display Items] and then click the [< Delete] button. The item will move to [Selectable Items] and will be hidden.

You can also change the order in which items are displayed by selecting an item in [Display Items] and then clicking the up and down buttons beneath [Display Items].



# Function Restrictions by Role

## List of Function Restrictions by Role

Roles other than Administrator (i.e. Super User and User accounts) are subject to restrictions on the functions available for use.

Functions indicated with a circle (○) in the table below are available for use.

|                                    |                  | Administrator | Super User | User |
|------------------------------------|------------------|---------------|------------|------|
| View tab                           |                  |               |            |      |
| Device registration                |                  | ○             |            |      |
| Device Display Filtering           |                  | ○             | ○          | ○    |
| Changing settings on the list view |                  | ○             | ○          |      |
| Scene File Operation               |                  | ○             | ○          |      |
| Device menu                        | Control          | ○             | ○          | ○    |
|                                    | Web              | ○             | ○          | ○    |
|                                    | Power ON         | ○             |            |      |
|                                    | Standby          | ○             |            |      |
|                                    | Record start     | ○             | ○          | ○    |
|                                    | Record stop      | ○             | ○          | ○    |
|                                    | Edit             | ○             |            |      |
|                                    | Delete           | ○             |            |      |
| Group menu                         | Power ON all     | ○             |            |      |
|                                    | Standby all      | ○             |            |      |
|                                    | Record start all | ○             | ○          | ○    |
|                                    | Record stop all  | ○             | ○          | ○    |
|                                    | Edit group       | ○             |            |      |
|                                    | Delete group     | ○             |            |      |
|                                    |                  |               |            |      |
| EasyIP tab                         |                  |               |            |      |
| Function access                    |                  | ○             |            |      |
|                                    |                  |               |            |      |