

Linkage function with virtual studio system

In order to activate link function, please update firmware.

The system version of the AW-R150 is 2.10-00-0.00 or later.

(Please consult the store of purchase before using this function.)

Supported function

- AW Camera can be assigned as Virtual camera.
- It supports to control Pan/Tilt/Zoom/Focus, XYZ, Head/Pitch/Radius of virtual camera.
- It supports Virtual camera preset control (execute/register/delete).


Panel operation when selecting a virtual camera



Menu setting

- Select "LAN_VR" at CONNECT SETTING → CNNCT MD in the menu.
- The IP address and Port number settings are same setting as AW cameras.

Menu	Item	Selection item	Explanation	
SYSTEM	2. CONNECT SETTING	CNNCT MD	LAN_VR	Added "LAN_VR" for virtual system connection
	11. VR CONTROL	CAM SEL	1- 200	The camera number associated with "XPOINT NO".
		XPOINT NO	1 - 12	This is Cross point selection (virtual camera selection). When a camera is selected, "XPOINT NO" will be notified to the connection of destination.
		UPDATE NOW	NO?, YES?	Instructions for reflecting cross point selection settings
		CTRL MD	REAL-PTZ, VIR-PTZ, VIR-HPR, VIR-XYZ, XPO-XYZ, XPO-HPRO, INO-XYZ, INO-HPRO	Selection of PAN/TILT lever operation mode.
		SPACE DIR	FLOOR, WALL	Notify the connection destination of the reference direction of 3D space.
		AIM	OFF, ON	Notify the connection destination of the target value setting.

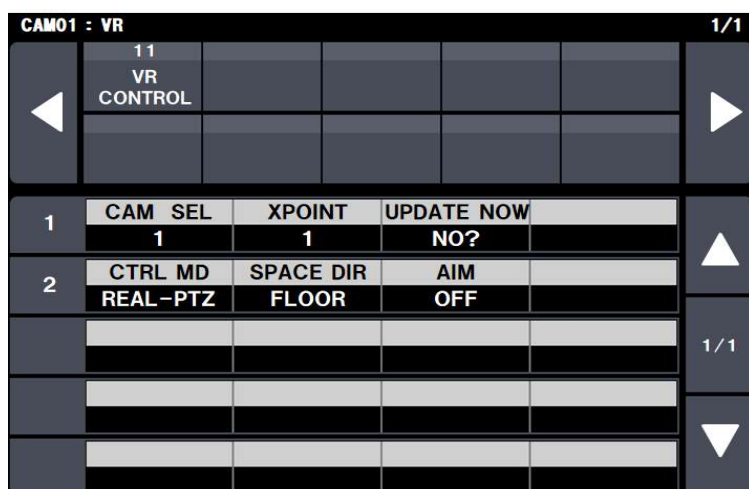

[Note]

- Up to 12 virtual cameras (XPOINT NO) can be set with one virtual system (one IP address).