

# P2 cast setting

---

## Overview (Please refer to following pages for each menu setting details.)

Step1. Log-into P2 Cast [\(See page 2\)](#)



Step2. Register your P2 device in P2 Cast. [\(See page 3-5\)](#)



Step3. Create user account & Download user profile from user menu in the config menu .[\(See page 6-10\)](#)



Step4. Copy the “Private” folder to SD memory card.[\(See page 11\)](#)



Step5. Insert SD memory card and reboot P2 device. [\(See page 12\)](#)  
**Please be informed that camera network setting is necessary before inserting it.**

# Step1. Log- into P2 Cast

---


Please input “User ID” and “Password”.

“User ID” and “Password” are sent by email after registration of P2 Cast.

Email title: “[Panasonic P2 Cast] Certificate of P2 Cast User License”.

If you don’t have it, please contact P2 Cast support Team ([proav@ml.jp.panasonic.com](mailto:proav@ml.jp.panasonic.com))

## Log-in screen of P2 Cast

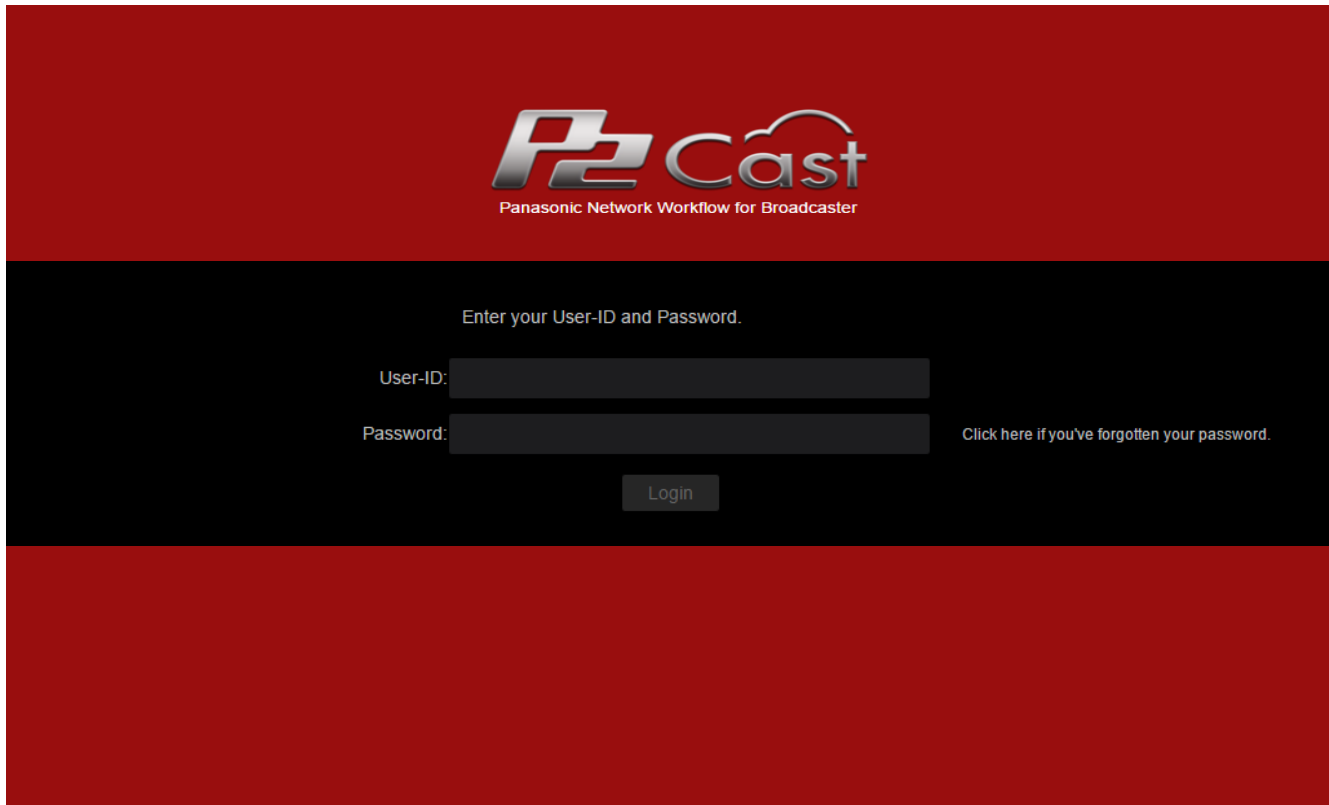

**P2 Cast**  
Panasonic Network Workflow for Broadcaster

Enter your User-ID and Password.

User-ID:

Password:

[Click here if you've forgotten your password.](#)


Login

## Step2. Register your P2 device in P2 Cast

### Overview

1. Click “CONFIG”
2. Click “P2 Device”
3. Register nick name of your P2 device and input “NETWORK ID”  
Please refer to camera setting manual for NETWORK ID confirmation.

### 1. Click “Config” after log-into P2 Cast

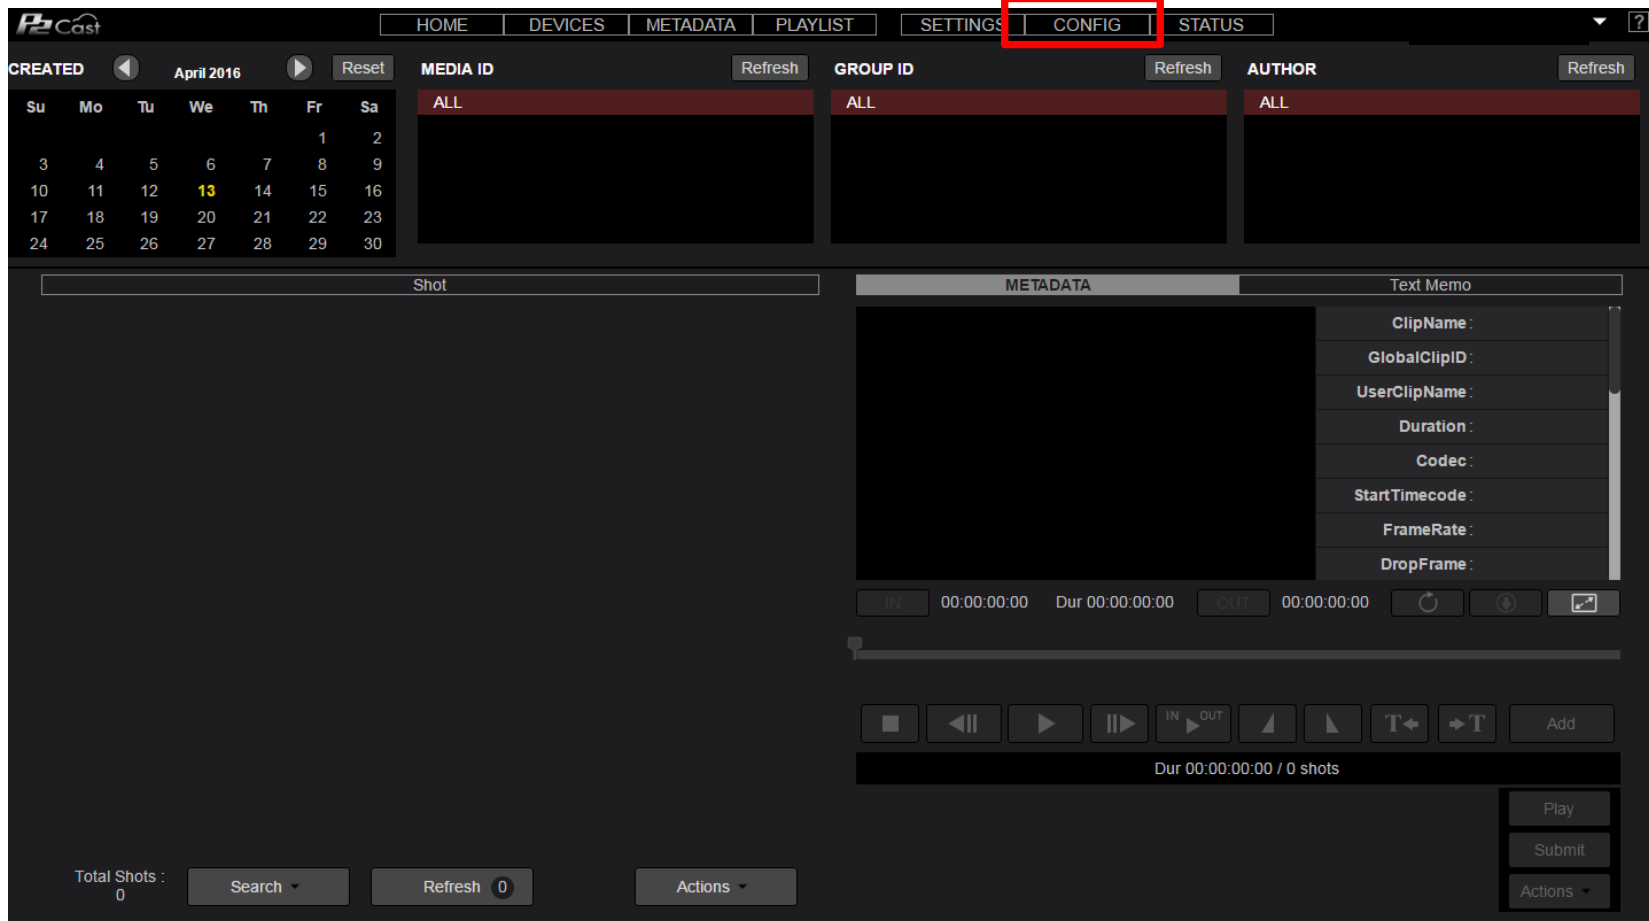


The screenshot displays the P2 Cast web interface. At the top, a navigation bar includes tabs for HOME, DEVICES, METADATA, PLAYLIST, SETTINGS, CONFIG, and STATUS. The CONFIG tab is highlighted with a red box, and a red arrow points to it from the text above. Below the navigation bar, there are three main sections: CREATED (with a calendar for April 2016), MEDIA ID (with a Refresh button), GROUP ID (with a Refresh button), and AUTHOR (with a Refresh button). The main content area is divided into three columns: Shot, METADATA, and Text Memo. The METADATA column contains a large empty area. The Text Memo column contains a list of fields: ClipName, GlobalClipID, UserClipName, Duration, Codec, StartTimecode, FrameRate, and DropFrame. At the bottom, there is a playback control bar with buttons for IN, OUT, and various playback functions. The status bar at the very bottom shows 'Total Shots : 0' and 'Dur 00:00:00:00 / 0 shots'.

## Step2. Register your P2 device in P2 Cast (Continued)


2. Click "P2 device"



3. Click "ADD"

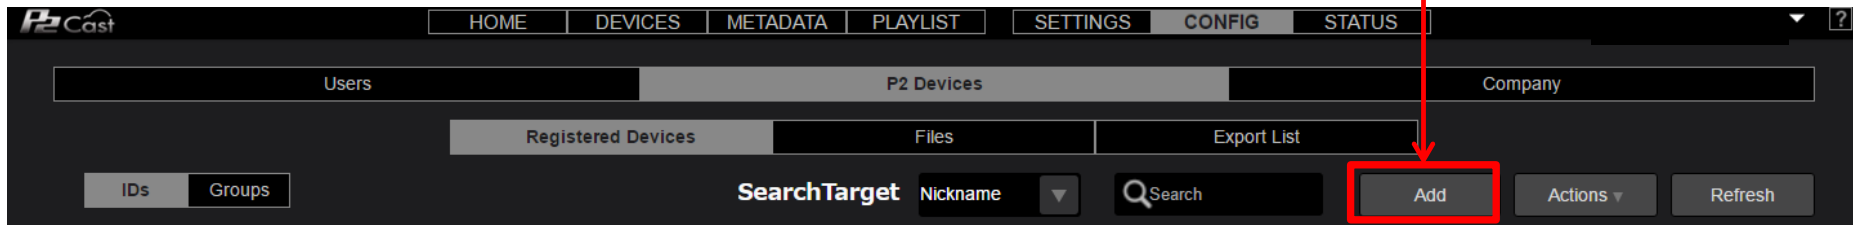

4. Select "Device type" as Panasonic P2 and click "NEXT"

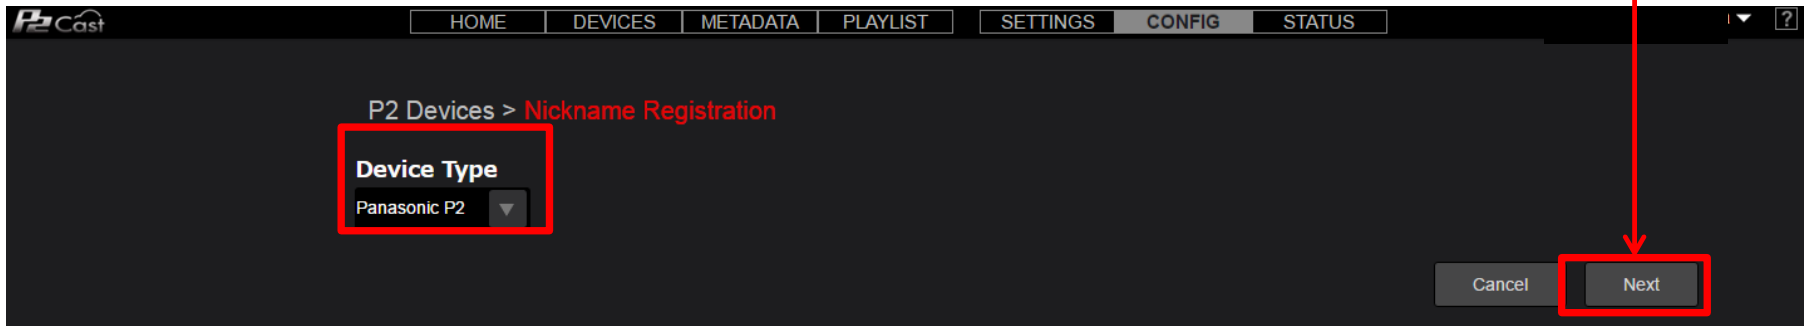

## Step2. Register your P2 device in P2 Cast (Continued)

5. Input "Nickname" and "Network ID" and 3.Click "ADD " .

P2 Devices > Nickname Registration > P2 Device Information

Nickname \*

Network ID \*

Cancel Back Add

\*Please confirm the camera setting manual for how to check Network ID.

6. Your P2 device will be added .

Model number and serial number will be added once your P2 device is connected to P2 Cast.

Users		P2 Devices			Company	
Registered Devices		Files	Export List			
SearchTarget		Nickname	Q Search	Add	Actions	Refresh
Nickname	Model	Serial No.	Network ID	Online	Firmware	
AJ-PX270 JAPAN	AJ-PX270			●		

# Step3. Create an user account & Download user profile

## Overview


1. Click "CONFIG"
2. Create user account & click one of the user (highlighted in red if selected) and then click "Actions"
3. Select "Download profile and input the log-in password for P2 Cast.  
Download will start automatically. (Please do not use the "User Admin account ")

## 1. Click "Config" after log-into P2 Cast

The screenshot displays the P2 Cast web interface. At the top, there is a navigation bar with tabs: HOME, DEVICES, METADATA, PLAYLIST, SETTINGS, CONFIG, and STATUS. The CONFIG tab is highlighted with a red box, and a red arrow points to it from the text above. Below the navigation bar, there are three main sections: CREATED (with a calendar for April 2016), MEDIA ID, and GROUP ID. Each section has a Refresh button. The MEDIA ID and GROUP ID sections are currently empty. Below these sections, there is a METADATA section with a Text Memo field. The Text Memo field contains the following information: ClipName, GlobalClipID, UserClipName, Duration, Codec, StartTimecode, FrameRate, and DropFrame. At the bottom of the interface, there is a Total Shots counter (0), a Search dropdown, a Refresh button (0), and an Actions dropdown. The bottom right corner has buttons for Play, Submit, and Actions.


## Step3. Create an user account & Download user profile (continued)

2. Click “Add” and create a user account (highlighted in red if selected) and Click “Actions”

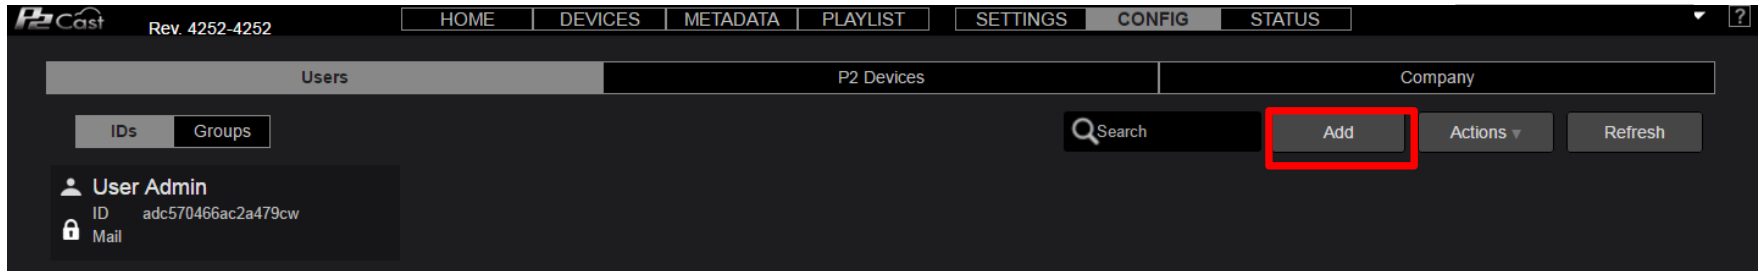


3. Fill in each field and create a user account. For more details, please confirm page 15 of P2 Cast user guide below.

[https://www.pass.panasonic.co.jp/pro-av/support/content/faq/EN/p2cast\\_en\\_files/p2cast\\_userguide.pdf](https://www.pass.panasonic.co.jp/pro-av/support/content/faq/EN/p2cast_en_files/p2cast_userguide.pdf)

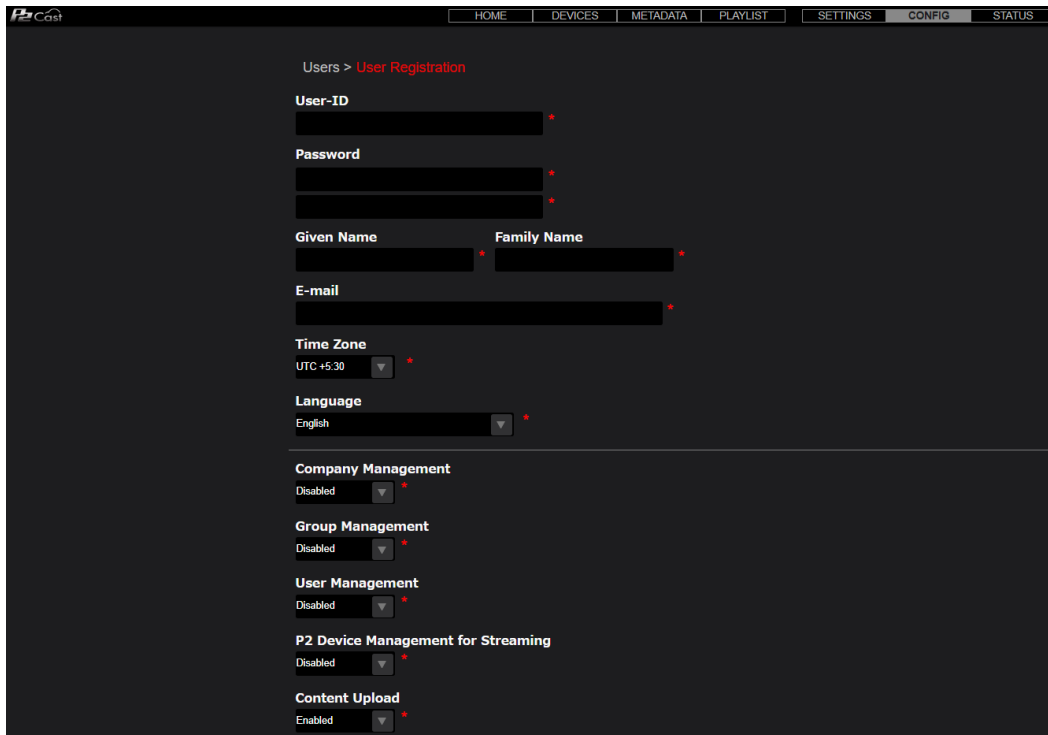The screenshot shows the P2 Cast user registration form. The form is titled 'Users > User Registration'. It contains several fields: 'User-ID', 'Password', 'Given Name', 'Family Name', 'E-mail', 'Time Zone', 'Language', 'Company Management', 'Group Management', 'User Management', 'P2 Device Management for Streaming', and 'Content Upload'. Each field has a red asterisk indicating it is required. The 'Time Zone' is set to 'UTC +5:30', 'Language' is 'English', 'Company Management' is 'Disabled', 'Group Management' is 'Disabled', 'User Management' is 'Disabled', 'P2 Device Management for Streaming' is 'Disabled', and 'Content Upload' is 'Enabled'.

## Step3. Create an user account & Download user profile (continued)

4. After filling in all fields, please add “All P2 device” to “Selected P2 Devices”.

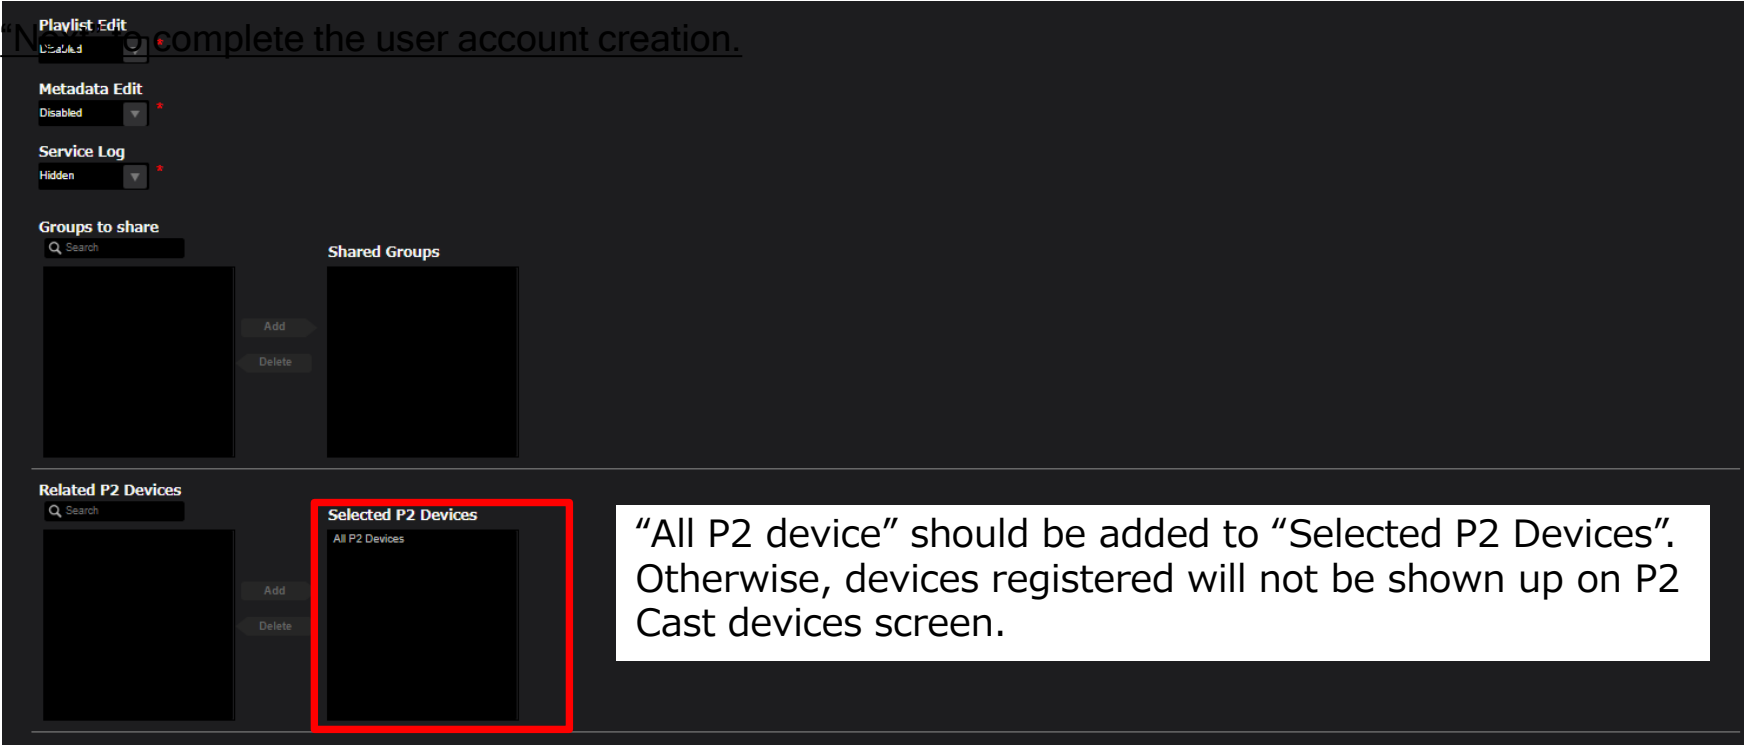

Do not complete the user account creation.

**Playlist Edit**

Disabled

**Metadata Edit**

Service Log

Hidden

**Groups to share**

Shared Groups

**Related P2 Devices**

**Selected P2 Devices**

All P2 Devices

“All P2 device” should be added to “Selected P2 Devices”. Otherwise, devices registered will not be shown up on P2 Cast devices screen.

5. Click “Next” to complete the user account creation.



**Exclusive Setting**

ON OFF

Cancel Next




## Step3. Create an user account & Download user profile (continued)


6. Click user account created (highlighted in red if selected) and Click “Actions”



7. Click “Download profile”.

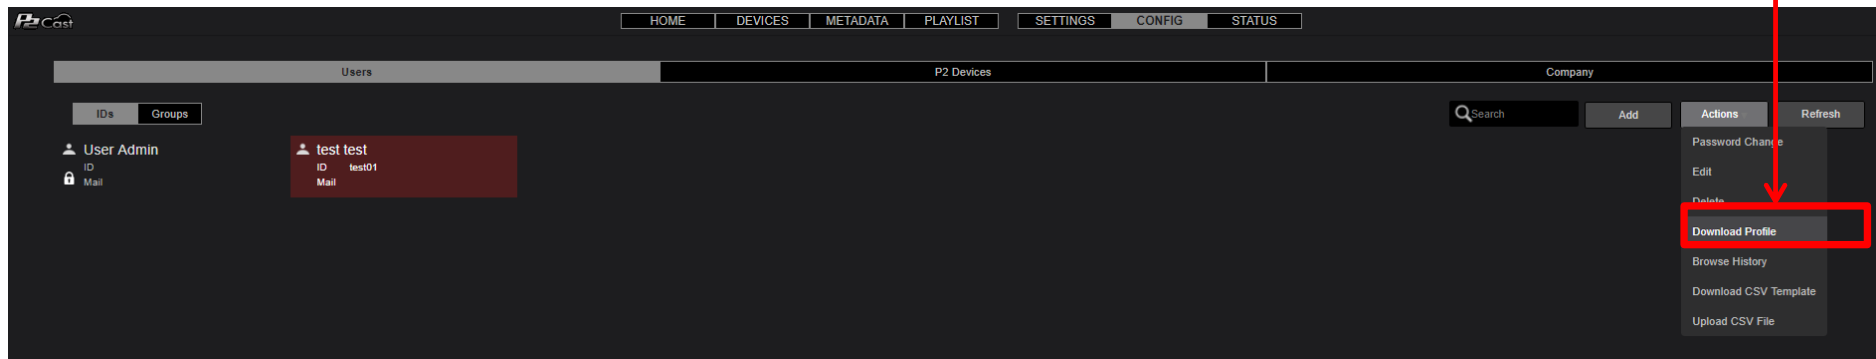


8. Input the log-in password for P2 Cast and click “Download”. Download will start automatically.

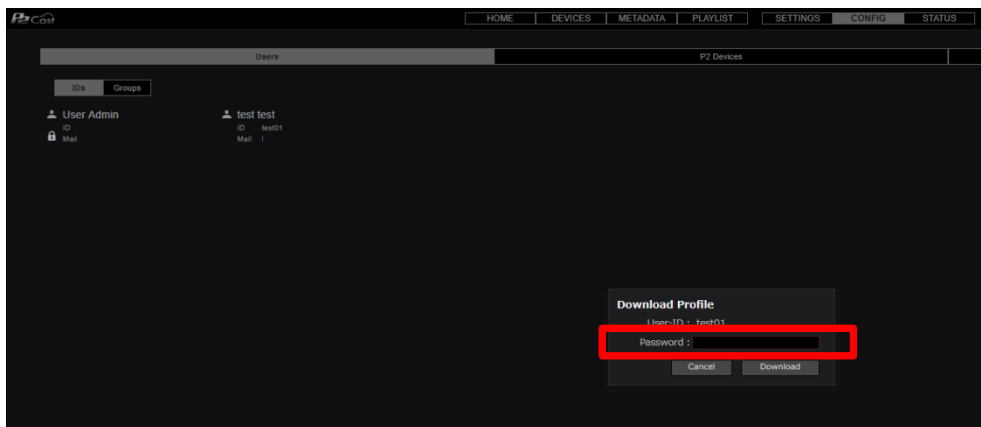

## Step3. Download user profile (continued)

9. Download status bar appears on the bottom. Click “open folder” and then unzip “p2nwcon .zip” file

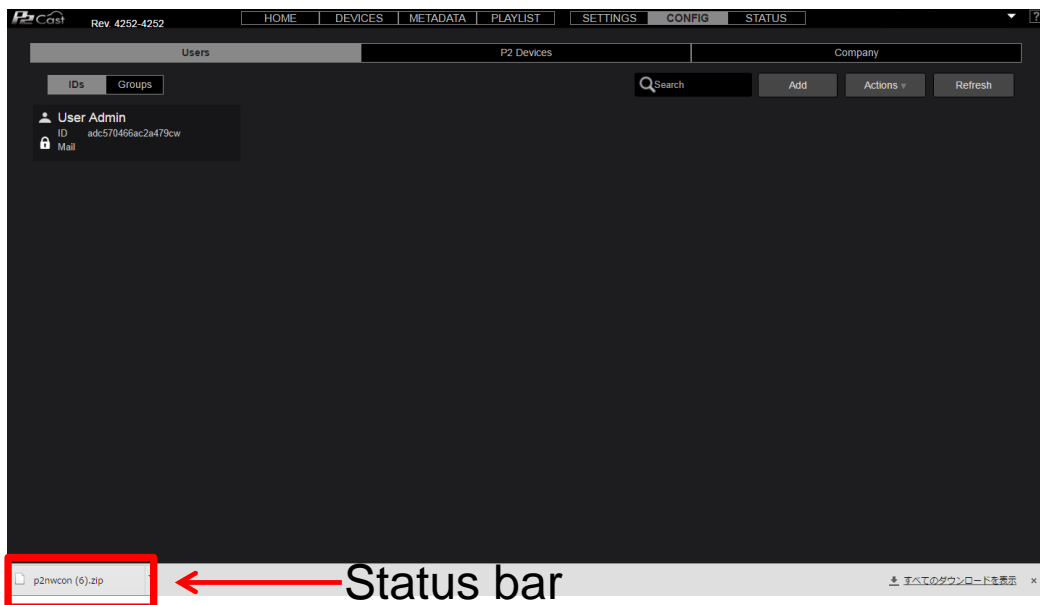

If the web browser Google Chrome setting is as default, “p2nwcon” zip is stored in the “download” folder under ¥Users¥<username>¥Downloads.

10. After unzip, private folder will appear where you designated.



Folder structure:  
private¥meigroup¥pavcn¥sbg¥p2sd

# Step4. Copy the "Private" folder to SD memory card


## Overview

1. Unzip "p2nwcon.zip" which contains user profile.

(If the web browser Google Chrome setting is as default, "p2nwcon" zip is stored in the "download" folder under %Users%<username>%Downloads.)

2. Format SD memory card in your P2 device. **Please do not format with PC.**

3. Copy the "Private" folder to SD memory card.

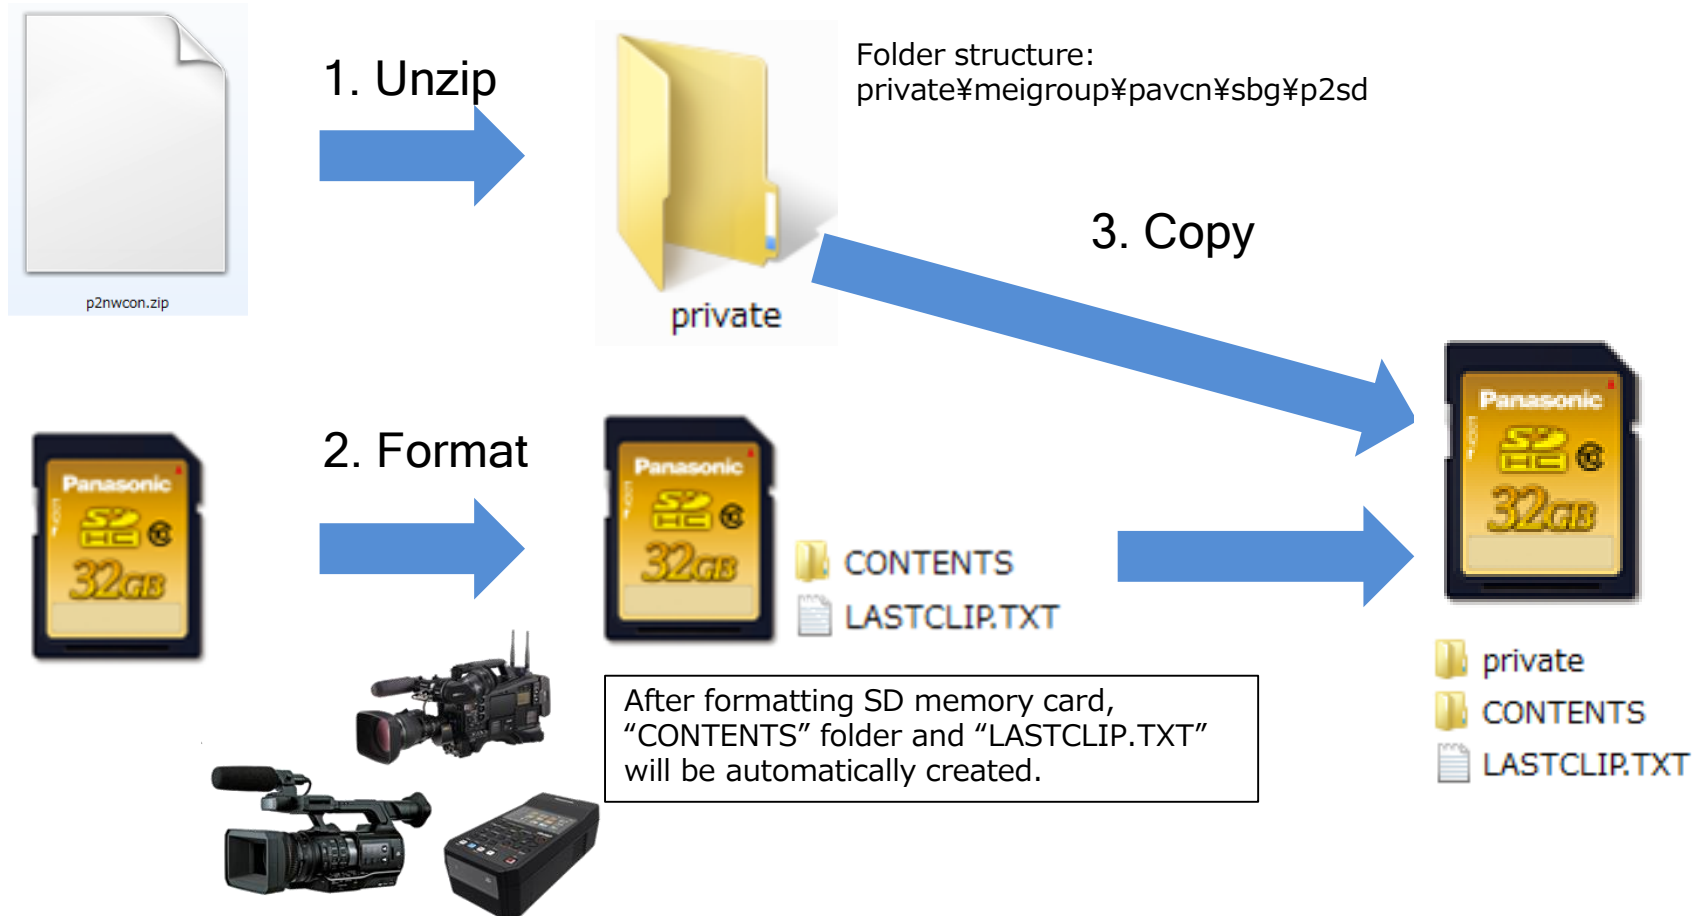

## Step5. Insert SD memory card and reboot P2 device.


### Overview

1. Insert SD memory card with user profile (private folder) to your P2 device.

As of Apr. 2016, following model is compatible with P2 Cast:

AJ-PX5000, AJ-PX800, AJ-PX380, AJ-PX270 and AJ-PG50 series.

2. After inserting it, please reboot your P2 device such that it can recognize your “user profile”.



1. Insert

