


【AW-HE2, AW-HEA10】 Error is Displayed if IP Address is Changed with Easy IP Setup Software.

■ Changing Static IP address


- ★ Depending on the version of your Easy IP Setup Software, the following error message may be shown when you click [Save] button on Network Settings window, and you may not be able to set Static IP address.

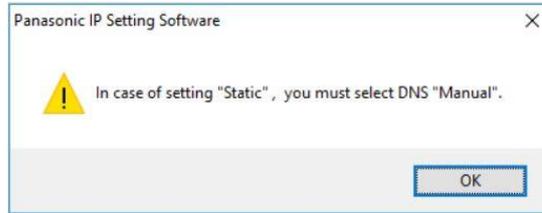

That is because both [Auto] and [Manual] setting items for DNS setting are being selected at the same time, resulting in inability to change the Static IP.

In that case, follow the procedure below to reselect [Manual] alone on DNS setting, and then change Static IP address.

1. Select the camera you need to change and click [Network Settings] button. Network Settings window is displayed.

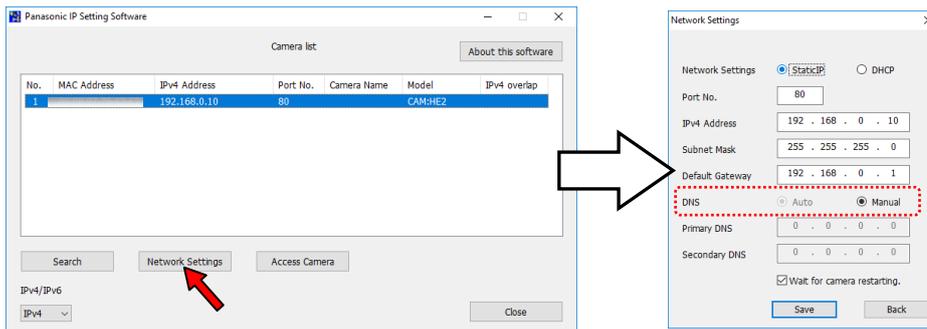


([Auto] and [Manual] are both being selected.)

2. Select the items in the following order.


Select [DHCP] on Network Settings.

Select [Manual] on DNS.

Select [Static IP] on Network Settings.

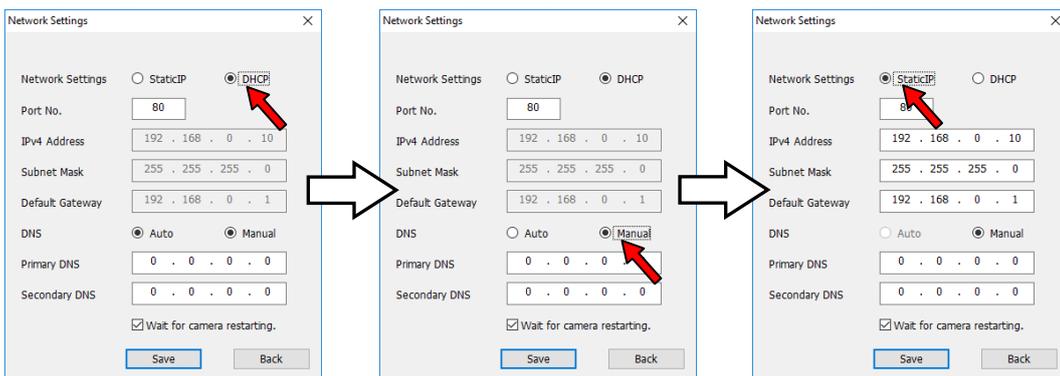

3. Change the IP address, and then click [Save] button. When “Camera setup completed.” is displayed, the change of address is completed.

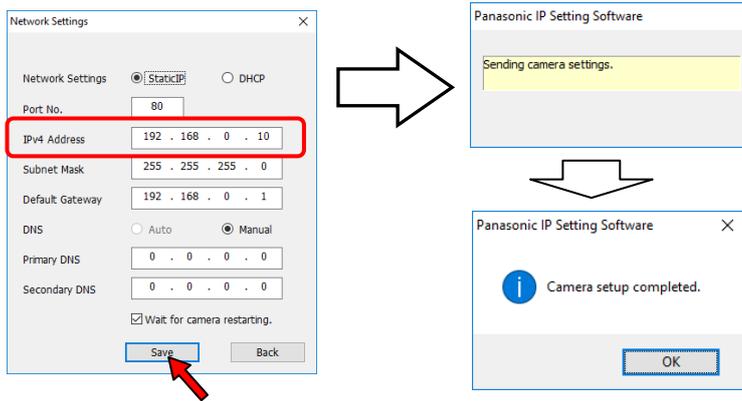

■ Setting IP address using DHCP function

- ★ Providing an IP address using DHCP function on Easy IP Setup Software

1. After you select [DHCP] on Network Settings item on [Network Settings] window, select the DNS setting item according to the intended use, and then save the settings.

