


# AW-SFU01 Setup Manual

# Items



- (1)Software download (PASS Site)
- (2)Software Versionup (Web Versionup)
- (3)Download “SERIAL.LST”
- (4)Activate
- (5)Upload “ACTIVE.LST”

# (1) Software download (PASS Site)

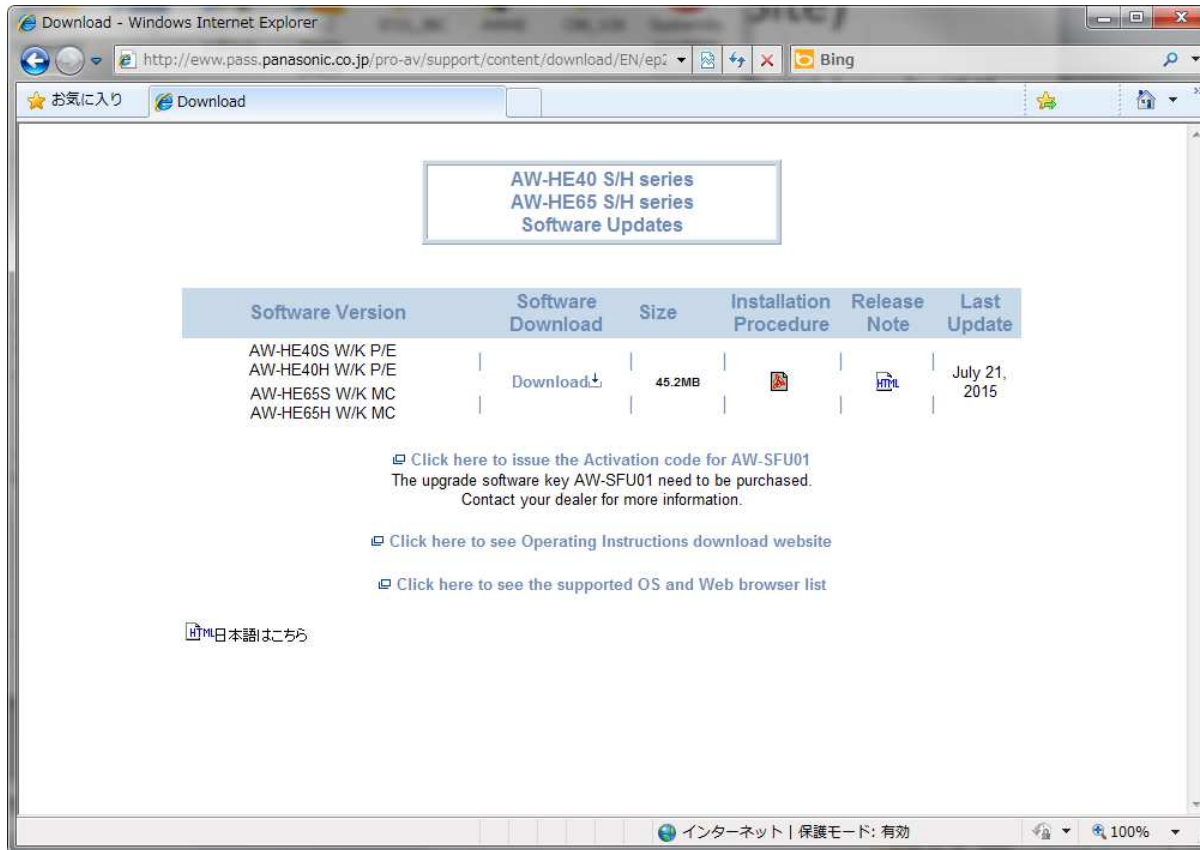(a) Please download the newest version of software for AW-HE40 from PASS Site



The screenshot shows a Windows Internet Explorer browser window displaying the PASS Site software download page. The address bar shows the URL: <http://www.pass.panasonic.co.jp/pro-av/support/content/download/EN/ep:>. The page content includes a header for "AW-HE40 S/H series" and "AW-HE65 S/H series Software Updates". Below this is a table with the following data:

Software Version	Software Download	Size	Installation Procedure	Release Note	Last Update
AW-HE40S W/K P/E AW-HE40H W/K P/E AW-HE65S W/K MC AW-HE65H W/K MC	<a href="#">Download</a>	45.2MB			July 21, 2015


Below the table, there are three links:

- [Click here to issue the Activation code for AW-SFU01](#)  
The upgrade software key AW-SFU01 need to be purchased.  
Contact your dealer for more information.
- [Click here to see Operating Instructions download website](#)
- [Click here to see the supported OS and Web browser list](#)

At the bottom left, there is a link: [HTML日本語はこちら](#). The browser status bar at the bottom shows "インターネット | 保護モード: 有効" and "100%".

\* As of July 21 2015, Ver. 1.21 is the newest

## (2) Software Version up

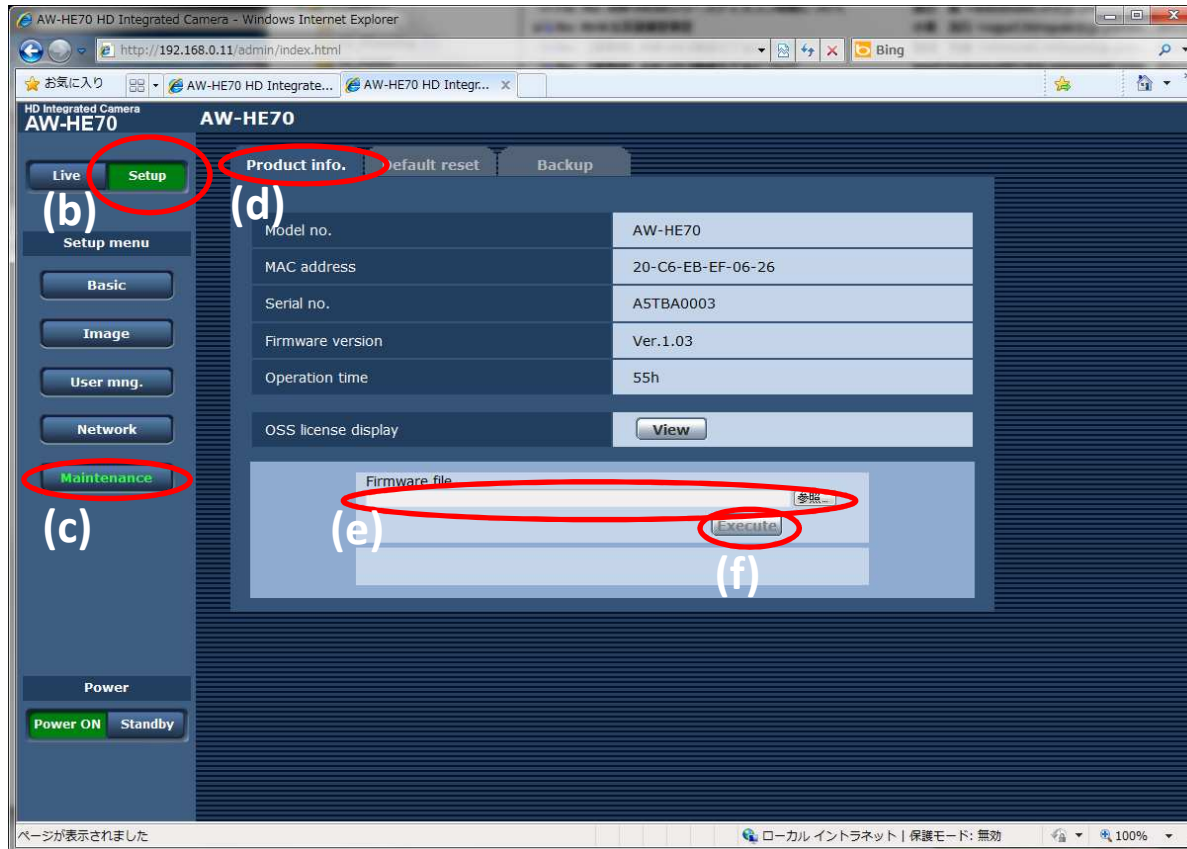

- (a) Web Access to HE40
- (b) Select “setup”
- (c) Select “maintenance”
- (d) Select “product info.”
- (e) Input Update file  
“UPDATE.HDC”
- (f) Press “Execute”

→after (f), go to restart  
automatically

→comes up “Live” page

## (2) Software Versionup (check)

The screenshot shows the web interface for the AW-HE70 camera. The browser address bar shows the URL `http://192.168.0.10/admin/index.html`. The interface has a left sidebar with navigation buttons: Live, Setup (circled in red and labeled (a)), Maintenance (circled in red and labeled (b)), and Power. The main content area has tabs: System log, Product info. (circled in red and labeled (c)), Status, Default reset, Backup, and Activate. The 'Product info.' tab is active, displaying a table of system information:


Model no.	AW-HE70
MAC address	20-C6-EB-EF-06-23
Serial no.	A5TBA0001
Firmware version	Ver.0.20 (circled in red and labeled (d))
Activation counter	1
Operation time	140h

Below the table, there is an 'OSS license display' section with a 'View' button. At the bottom, there is a 'Firmware file' input field with a search icon and an 'Execute' button.

- (a) Select “setup”
- (b) Select “maintenance”
- (c) Select “product info.”
- (d) Firmware version  
= **ver. 1.21**, go to  
Next step

\*If not “ver. 1.21”,  
back to previous step

# (3) Download “SERIAL.LST”

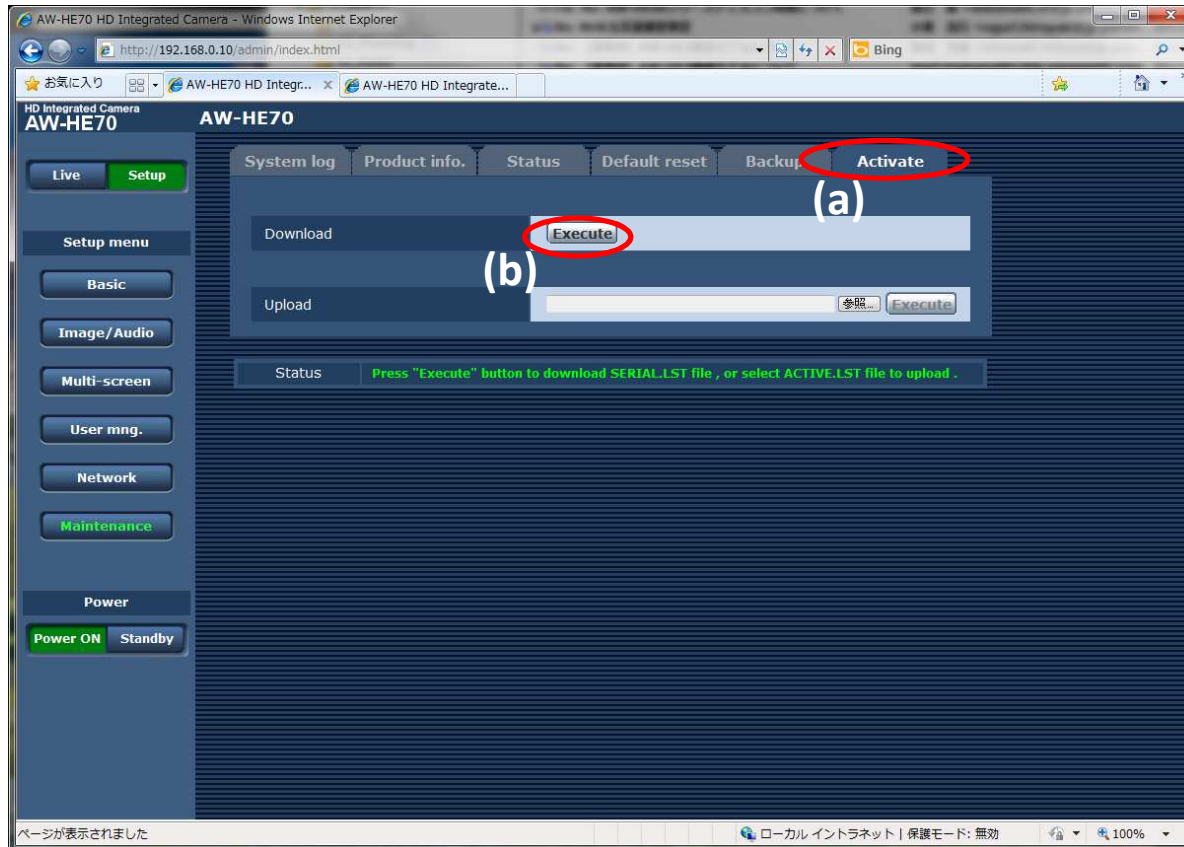


- (a) Select “activate”
- (b) Press “Execute”  
for download  
“SERIAL.LST”

\*Can download any ware  
in PC

# (4) Activate



## (a) Overview

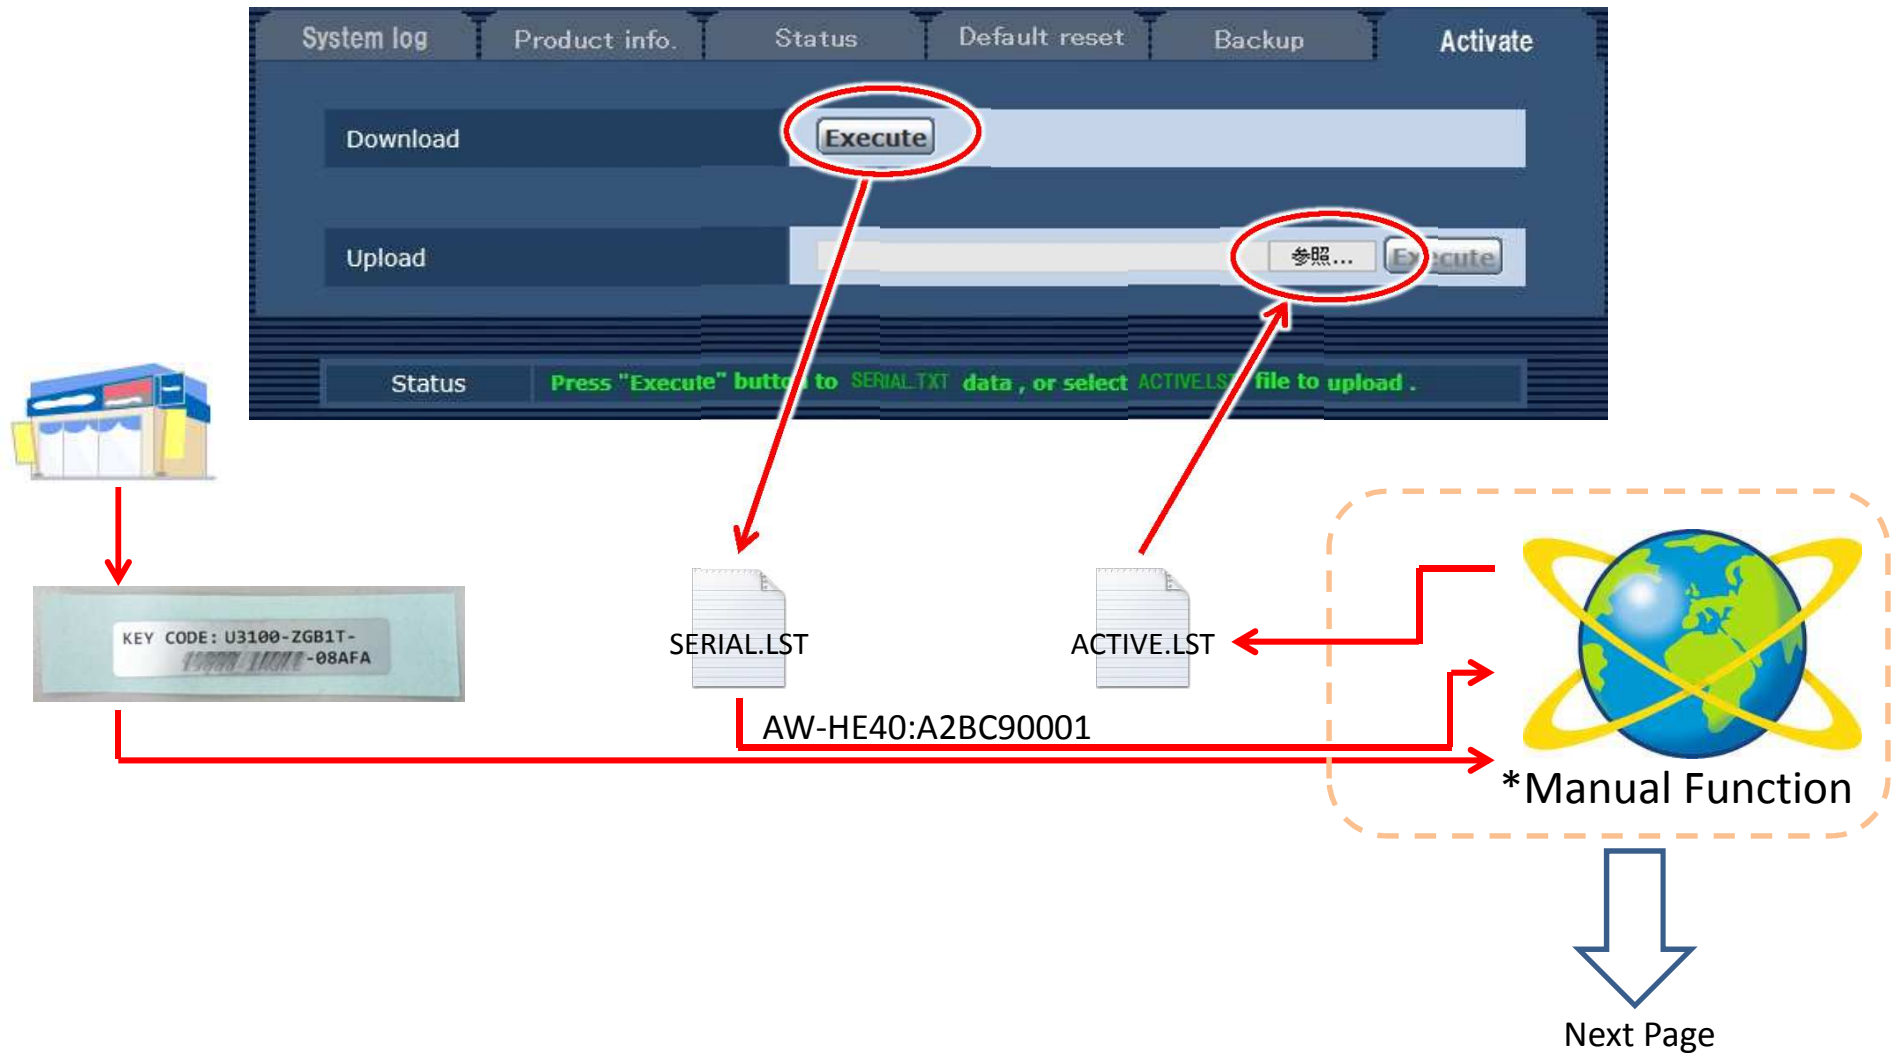

# (4) Activate

(b) Access PASS Site

(<http://eww.pass.panasonic.co.jp/p2ui/guest/TopLogin.do>)

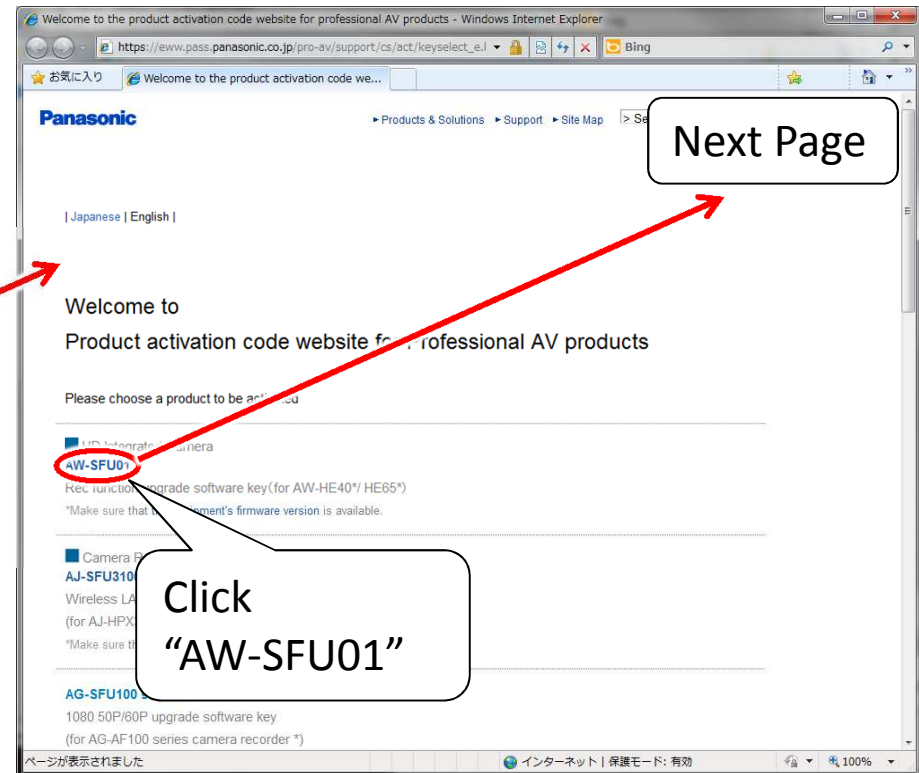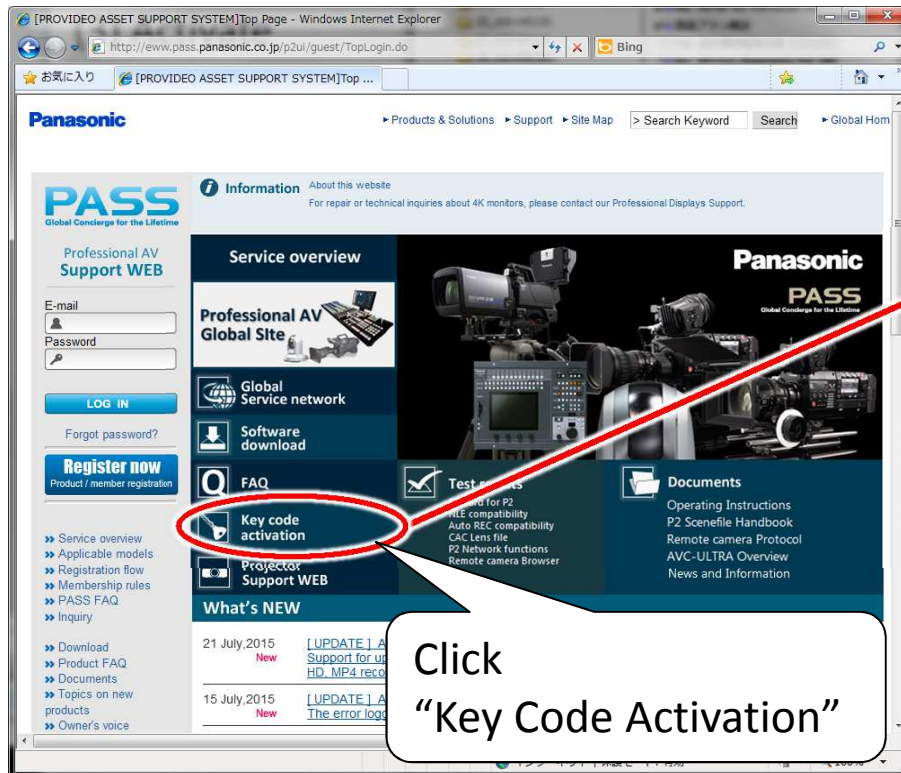



# (4) Activate

(c) Please fill in the following fields

(d) Confirmation of input data

Windows Internet Explorer window showing the registration form. The URL is <https://eww.pass.panasonic.co.jp/activation/RegistACCustomerConfirmBa...>. The form is titled "Issue activation code(s)" and "Please fill in the following fields".

E-mail	<b>required</b>	maeda.hiroshi@jp.panasonic.com
Confirm e-mail address	<b>required</b>	maeda.hiroshi@jp.panasonic.com
Company/Institution/Organization name	<b>required</b>	System Planning Department
Country/Area	<b>required</b>	JAPAN

Buttons: Back, Next (circled in red), Submit, Clear.

Callout box: Click "NEXT"

Windows Internet Explorer window showing the confirmation page. The URL is <https://eww.pass.panasonic.co.jp/activation/RegistACCustomer.do>. The form is titled "Issue activation code(s)" and "Confirmation of input data".

E-mail	maeda.hiroshi@jp.panasonic.com
Company/Institution/Organization name	System Planning Department
Country/Area	JAPAN

Text: Click "Next" to proceed.

Buttons: Back, Next (circled in red).

Callout box: Click "NEXT"

Callout box: Next Page (with arrow pointing to the Next button)

# (4) Activate

(e) Upload and register the exported profile(s) (f) Key code(s) entry

The image shows two screenshots of the Panasonic activation website in Internet Explorer. The first screenshot is titled "Upload and register the exported profile(s)" and shows a file upload interface. A red circle highlights the "Upload" button, with a callout box stating "2) Click 'Upload'". Another red circle highlights the "SERIAL.LST" file name in the file list, with a callout box stating "1) Select 'SERIAL.LST'". The second screenshot is titled "Key code(s) entry" and shows a table with columns for Model No., Serial No., and Activation code. The "Activation code" field contains the value "011-ZGD5T-14010-8TKJR-950B3", which is circled in blue. A callout box states "3) Input 'Key code'". Below the table, there are "Back" and "Next" buttons. The "Next" button is circled in red, with a callout box stating "4) Click 'NEXT'". A red arrow points from the "Next" button to a box labeled "Next Page".

1) Select "SERIAL.LST"

2) Click "Upload"

3) Input "Key code"

4) Click "NEXT"

Next Page

# (4) Activate

(g) Saving activation code(s)

1) Click "Save to SD card" to save ACTIVE.LST

2) Click "Save"

Model No.	Serial No.	Key code	Activation code
AW-HE70SW	A5TBA0002	U0001-ZGD5T-14010-8TKJR9E3	U0001-ZGD5T-14010-8TAMJ-BFLPC-MHJNR


(h) Saving activation code(s)

3) Pls note this activation code for secure

4) Click "End"


Model No.	Serial No.	Key code	Activation code
AW-HE70SW	A5TBA0002	U0001-ZGD5T-14010-8TKJR-950B3	U0001-ZGD5T-14010-8TAMJ-BFLPC-MHJNR

# (5) Upload “ACTIVE.LST”

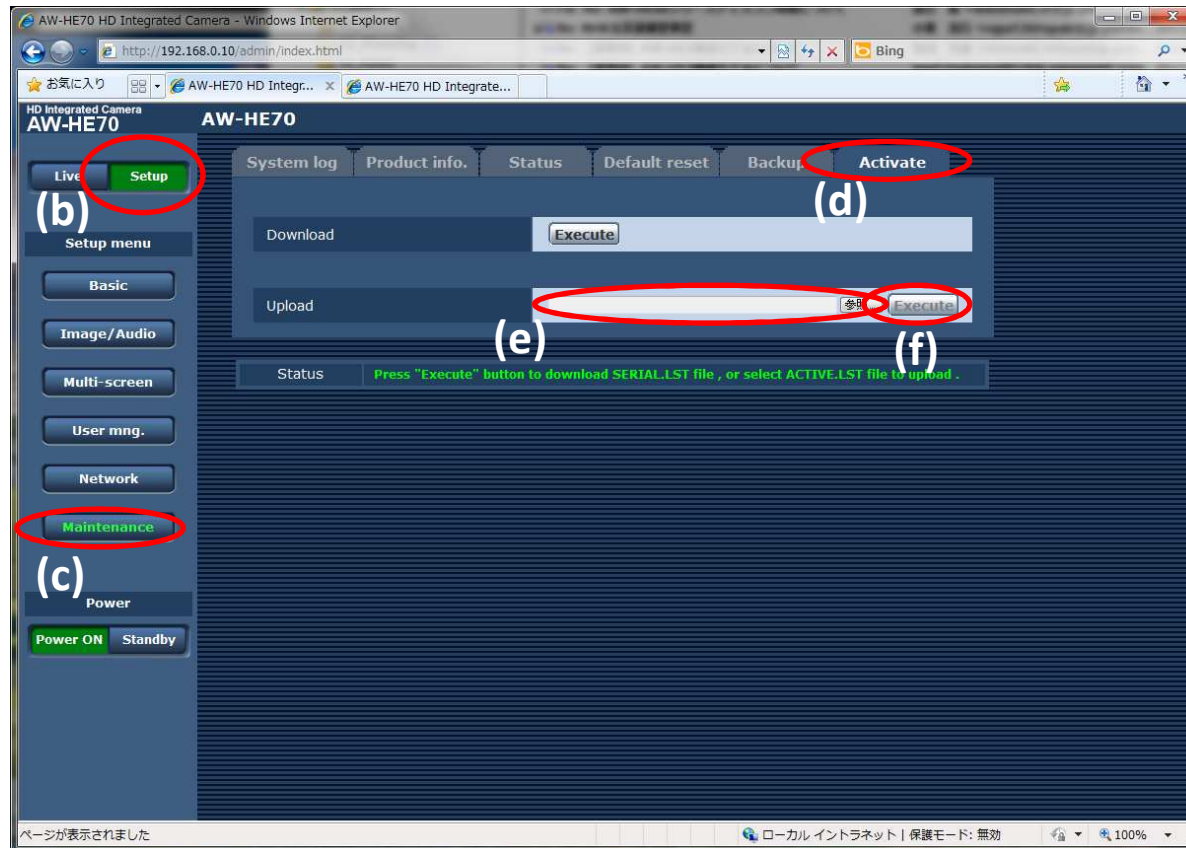

- (a) Web Access to HE40
- (b) Select “setup”
- (c) Select “maintenance”
- (d) Select “activate”
- (e) Select ACTIVE.LST
- (f) Press “Execute” for upload

# (5) Upload “ACTIVE.LST” (check)

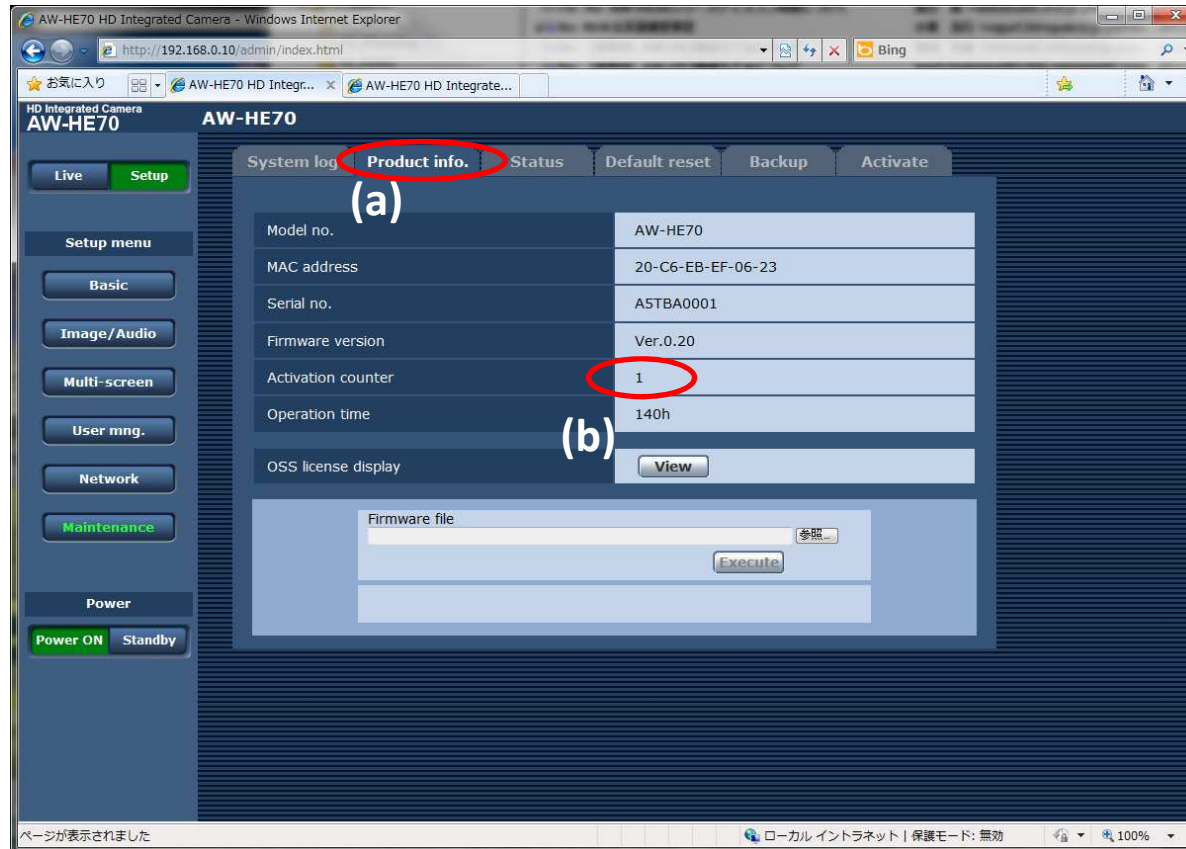

(a) Select “product info.”  
(b) Activation Counter  
= 1 : Success → Finish

\*If not “1”, but “0”,  
back to previous step