


Panasonic

User Guide

AV-HS410 Plug-in Software

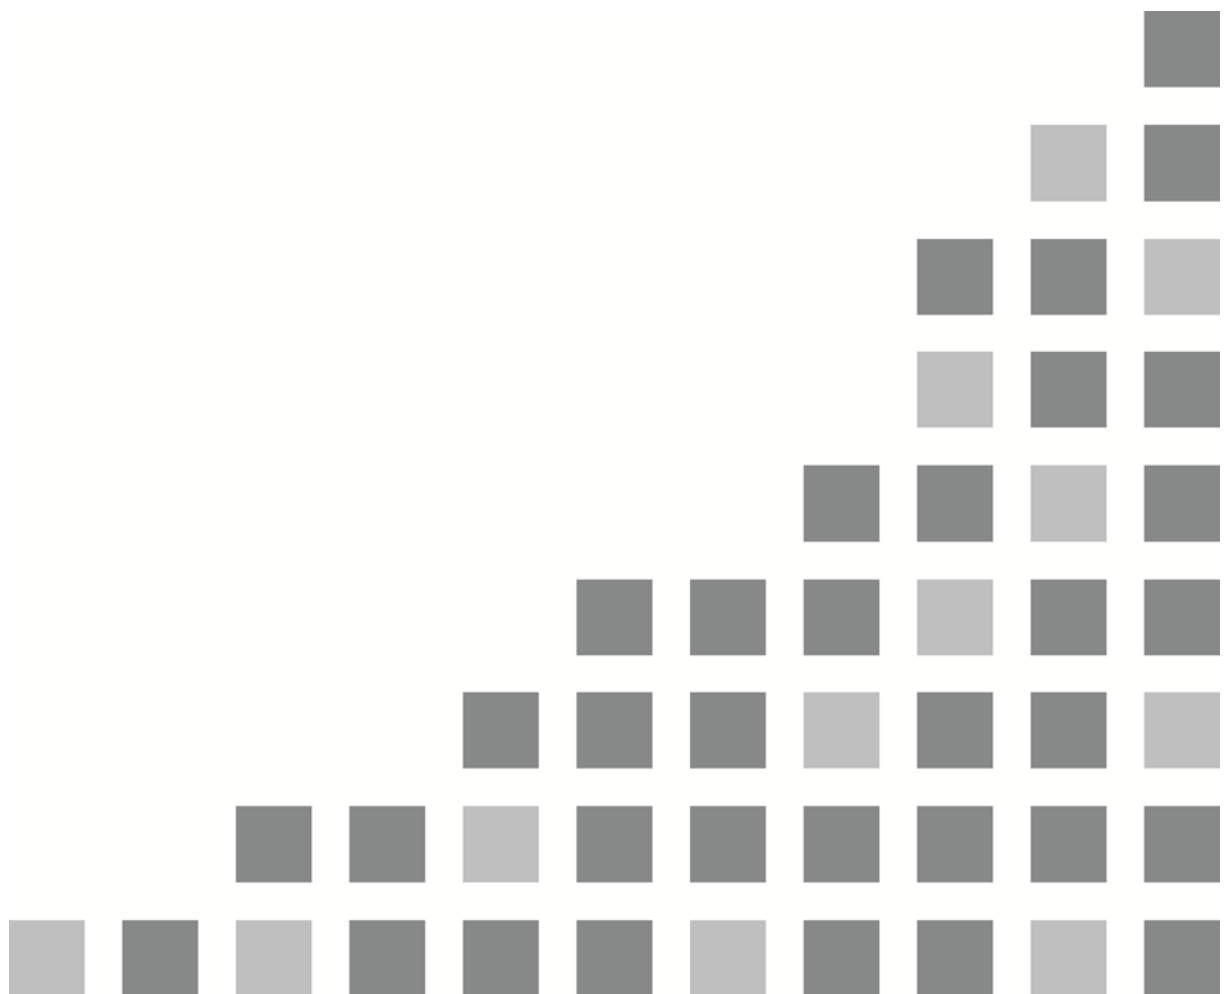

ENGLISH

Contents

<Overview>.....	3
<How to obtain the Plug-in Software>.....	3
<How to register the Plug-in Software>	4
<How to start up the Plug-in Software>	5
<How to operate the Plug-in Software>	6
1. CAM_IP.....	6
1.1. Communication method	6
1.2. Verified models.....	6
1.3. Functions	6
2. CAM_COM.....	9
2.1. Communication method	9
2.2. Verified models.....	9
2.3. Functions	9
3. P2 Remote	12
3.1. Communication port.....	12
3.2. Verified models.....	12
3.3. Functions	12
4. GVG Protocol.....	13
4.1. Communication port.....	13
4.2. Verified models.....	13
4.3. Functions	13
5. AUXP_IP.....	15
5.1. Communication port.....	15
5.2. Functions	15
6. HS410_IF.....	16
6.1. Communication Setting.....	16
6.2. Function	16

Abbreviations

- Both SD memory cards and SDHC memory cards are described as “memory cards” in this manual. When individual descriptions are provided, they are featured individually.

<Overview>

By registering or installing the AV-HS410 Plug-in Software in the AV-HS410, the pan, tilt, zoom, focus and other functions of Panasonic's commercial cameras (AW series) can be controlled from the AV-HS410.

Furthermore, the AV-HS410 can be controlled from a remote control panel (VS-R45 made by Venetex) to perform crosspoint switching, AUTO transitions and other operations.

<How to obtain the Plug-in Software>

The Plug-in Software can be downloaded from "Service and Support" on the home page whose address is as follows:

<http://pro-av.panasonic.net/>

The six Plug-in Software applications listed below can be obtained.

1. CAM_IP

This application makes it possible to control the pan, tilt, zoom, focus and other functions from the AV-HS410 once a Panasonic professional camera (AW series) has been connected to a network.

- The CAM_IP software runs in an AV-HS410 model whose system software version is V2.00.00 or later.

If the system version of the AV-HS410 is earlier than V2.00.00, upgrade it to V2.00.00 or later.

2. CAM_COM

This application makes it possible to control the pan, tilt, zoom, focus and other functions from the AV-HS410 once a Panasonic professional camera (AW series) has been connected with a serial interface (RS-422).

- If the CAM_COM software version is V2.01 or later, it will run on an AV-HS410 model whose system software version is V2.00.00 or later.

If the system version of the AV-HS410 is earlier than V2.00.00, upgrade it to V2.00.00 or later.

3. P2 Remote

This application makes it possible to control the recording, playback and other operations from the AV-HS410 once a Panasonic P2 device has been connected with a serial interface (RS-422).

4. GVG Protocol

This application makes it possible to have the crosspoint switching, AUTO transitions and other operations controlled once a remote control panel (VS-R45 made by Venetex) or editor (that supports the GVG100 communication protocol) has been connected with a serial interface (RS-422).

The GVG100 communication protocol is supported.

5. AUXP_IP

This application makes it possible to have the crosspoint switching, AUTO transitions and other operations controlled once a remote control panel (VS-R45 made by Venetex) has been connected with a network.

- If the AUXP_IP software version is V2.00 or later, it will run on an AV-HS410 model whose system software version is V2.00.00 or later.

Conversely, if the AUX_IP software version is earlier than V2.00, it will run on an AV-HS410 model whose system software version is earlier than V2.00.00.

6. HS410_IF

This application makes it possible to control the AV-HS410 from an external device.

Using a dedicated command interface, bus switching, auto transitions, and other operations can be performed for the AV-HS410 from a computer that is connected via an IP network.

<How to register the Plug-in Software>

Preparing for registration:


1. Have at hand an memory card with a memory size of at least 8 MB.
 - SDXC memory cards are not supported.
2. Initialize the memory card using the AV-HS410.
3. Insert the memory card initialized using the AV-HS410 into the memory card slot of the personal computer.
4. Download the desired Plug-in Software zip files and copy them onto the hard disk of the personal computer.
5. Unzip the downloaded zip files.
6. Copy the "HS410" folder onto the memory card.
Do not change either the folder configuration or the filenames.

Registration procedure:

1. Insert the memory card onto which the Plug-in Software was copied into the memory card slot of the AV-HS410.
2. Press the [PLUGIN] button.
The Plug-in Software currently registered in the AV-HS410 is now displayed. Check the vacant index numbers.
3. Press the [VMEM/SD Card] button to light its indicator, and display the SD Card menu.
4. Use [F1] to display the File1 sub-menu.
5. Use [F2] to select Load in the Mode item and press [F2].
When [F2] is pressed, a file selection screen is displayed.
6. Use [F1] to select "Plug-in" for the type of file to be loaded at the SELECT item.
7. Use [F3] to select a vacant index number checked earlier.
8. Use [F4] to load (register) the Plug-in Software.

Note:

A warning message such as one shown below appears if Plug-in Software has already been registered in the index number selected above for registration.

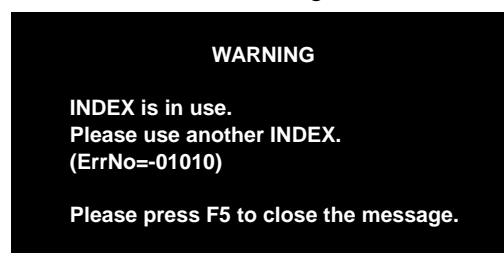

In a case like this, repeat the registration procedure starting from step 7.

Checking the registration:

6. Turn off the power of the AV-HS410 and then turn it back on again.
7. Press the [PLUGIN] button and check that the Plug-in Software has been registered.


Notes:

- Registered Plug-in Software can be deleted.
For the deletion procedure, refer to section "4.5 Plug-ins" (<Operations and Settings> Operating Instructions).
- Registered Plug-in Software cannot be saved from the AV-HS410 onto an memory card.

<How to start up the Plug-in Software>

1. Press the [PLUGIN] button, and display the Plug-in menu.
2. Use [F1] to select the Plug-in Software.

The Plug-in name of the Plug-in Software registered is displayed on the sub menu.

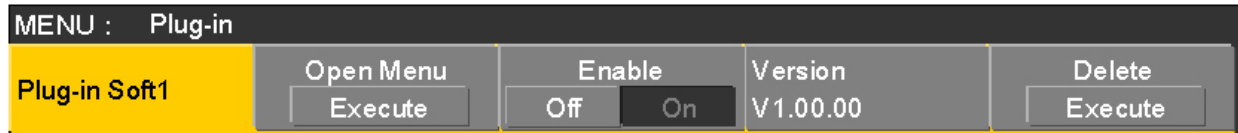

3. Use [F3] to select "On" for the Enable item.
If "On" has been selected for the Enable item, the selected Plug-in Software has already started up.
If "Off" has been selected for the Enable item, select "On", turn off the power of the AV-HS410 and then turn it back on again.
When the AV-HS410 starts up, the Plug-in Software starts up automatically.

Notes:

- If the Plug-in Software has not been started up, the screen will go black even when the menu screen of the Plug-in Software is opened.
- The Plug-in Software will start up even when the AV-HS410 is operating in the Service mode.

<How to operate the Plug-in Software>

1. CAM_IP

This application makes it possible to control the pan, tilt, zoom, focus and other functions from the AV-HS410 once a Panasonic professional camera (AW series) has been connected to a network.

- The CAM_IP software runs in an AV-HS410 model whose system software version is V2.00.00 or later.

If the system version of the AV-HS410 is earlier than V2.00.00, upgrade it to V2.00.00 or later.

1.1. Communication method

Connect the camera to be controlled to the LAN connector on the rear panel of the AV-HS410 using a LAN cable.

Use a crossover cable when connecting the AV-HS410 and camera on a 1:1 basis.

Note: The settings of the camera connected to the AV-HS410 must be matched with the network settings.

Before connecting the units, set the IP address of the camera to be connected and the port number using the Network sub-menu.

The camera cannot be connected to the AV-HS410 using a public line.

1.2. Verified models

- AW-HE50

1.3. Functions


Select the sub-menu concerned from the Plug-in menu and press [F2] (Open Menu) to display the menu of the Plug-in concerned.

MENU : AW-CAM(IP)				
CamCTL1	Cam-Menu		Menu Operation	
	Off	On		
CamCTL2	Mode		PTSpeed	AF
	PanTilt	▼	Fast	▼
CamCTL3	MEM Preset			
	None	▼		
Network	IP Address		PORT	80
	192.168.0.10			

Sub-menu	Item/ rotary encoder operated	Function
CamCTL1	Cam-Menu [F2]	This item is used to set whether the camera menus are to be displayed on an external monitor. On: The camera menus are displayed on an external monitor. Off: The camera menus are not displayed on an external monitor. Note: This setting only causes the control signals to be sent to the camera. It does not indicate that the actual statuses in which the camera menus are displayed on the external monitor.
	MenuOperation [F3]	This rotary encoder is used when the cursor is to be moved using the camera menu. When it is turned clockwise, the cursor moves down; conversely, when it is turned counterclockwise, it moves up. It takes effect when "On" is selected for the Cam-Menu item. Notes: This rotary encoder can be operated when the AW-HE50 is used. It cannot be operated when the AW-HE100 or other camera is used.
	Power [F5]	This item setting is used to control the camera's power. On: The camera's power is set to "On" from the standby mode. Off: The camera's power is set to the standby mode from "On". Note: This setting only causes the control signals to be sent to the camera. It does not indicate that the actual camera's power status is displayed.
CamCTL2	Mode [F2]	This is used to select the type of camera control to be exercised by the AV-HS410's positioners. PanTilt: Panning is controlled by operating the positioner to the left or right. Conversely, tilting is controlled by operating the positioner up or down. Zoom/Focus: Lens focusing is controlled by operating the positioner to the left or right. Conversely, lens zooming is controlled by operating the positioner up or down.
	PTSpeed [F3]	This is used to select the speed at which the camera pans or tilts or at which the lens is focused or zoomed. Fast: The operations are performed at the fastest speed. Middle: The operations are performed at the intermediate speed. Slow: The operations are performed at the slowest speed.
	AF [F4]	This is used to select the type of control to be exercised over the focusing of the connected camera. Manual: The focus is controlled manually. Auto: The focus is controlled automatically.
	IRIS [F5]	This is used to select the type of control to be exercised over the iris of the connected camera. Manual: The iris is controlled manually. Auto: The iris is controlled automatically.

Sub-menu	Item/ rotary encoder operated	Function
CamCTL3	MEM Preset [F2]	This selects the memory in which the preset information of the camera is registered. None: Nothing selected MEM1: Use the memory registered in the [PLUGIN MEM1] button. MEM2: Use the memory registered in the [PLUGIN MEM2] button.
Network	IP Address [F2]	This is used to input the IP address of the camera connected. Before connecting the camera, check its IP address and input it here.
	Port [F4]	This is used to input the port number of the camera connected. Before connecting the camera, check its port number and input it here.

- When the button for the memory previously selected in the MEM Preset item of the CamCTL3 submenu is pressed and its button is set to ON (lighted), the preset information of the commercial camera can be registered, played back or deleted.

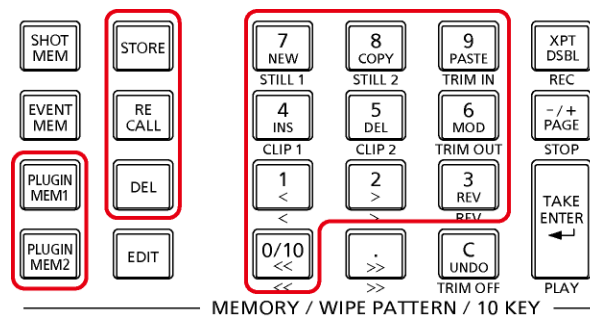

Press a number key (1 to 10) after pressing the [STORE] button.	The preset information is registered in the number of the corresponding number key. Hold down the number key.
Press a number key (1 to 10) after pressing the [RECALL] button.	The preset information of the number corresponding to the number key is played back.
Press a number key (1 to 10) after pressing the [DEL] button.	The preset information of the number corresponding to the number key is deleted. Hold down the number key.

- Up to 10 sets of preset information can be registered.
- The registered preset information is held in the camera. The numbers of the number keys are used as the preset numbers by the camera.
- The same preset memory can be selected in the CAM_COM software.
When the same preset memory is selected for both programs, it will function in the one selected last.

Note:

When the power of the AV-HS410 is turned off, the PTSpeed, AF and IRIS settings are restored to their defaults. After turning on the unit's power, these items need to be set again.

2. CAM_COM

This application makes it possible to control the pan, tilt, zoom, focus and other functions from the AV-HS410 once a Panasonic professional camera (AW series) has been connected with a serial interface (RS-422).

- If the CAM_COM software version is V2.01 or later, it will run on an AV-HS410 model whose system software version is V2.00.00 or later.

If the system version of the AV-HS410 is earlier than V2.00.00, upgrade it to V2.00.00 or later.

2.1. Communication method

Connect the camera to be controlled to the Com connector on the rear panel of the AV-HS410 using an RS-422 crossover cable.

Select Config menu → COM-Port sub-menu → Mode item and set “1” for the item.

2.2. Verified models

- AW-HE50

2.3. Functions


Select the sub-menu concerned from the Plug-in menu and press [F2] (Open Menu) to display the menu of the Plug-in concerned.

MENU : AW-CAM(Serial)						
CamCTL1	Cam-Menu		Menu Operation		Power	
	Off	On			Off	On
CamCTL2	Mode		PTSpeed	AF	IRIS	
	PanTilt ▼		Fast ▼	Manual ▼	Manual ▼	
CamCTL3	MEM Preset					
	None ▼					

Sub-menu	Item/ rotary encoder operated	Function
CamCTL1	Cam-Menu [F2]	This item is used to set whether the camera menus are to be displayed on an external monitor. On: The camera menus are displayed on an external monitor. Off: The camera menus are not displayed on an external monitor. Note: This setting only causes the control signals to be sent to the camera. It does not indicate that the actual statuses in which the camera menus are displayed on the external monitor.
	MenuOperation [F3]	This rotary encoder is used when the cursor is to be moved using the camera menu. When it is turned clockwise, the cursor moves down; conversely, when it is turned counterclockwise, it moves up. It takes effect when "On" is selected for the Cam-Menu item. Notes: This rotary encoder can be operated when the AW-HE50 is used. It cannot be operated when the AW-HE100 or other camera is used.
	Power [F5]	This item setting is used to control the camera's power. On: The camera's power is set to "On" from the standby mode. Off: The camera's power is set to the standby mode from "On". Note: This setting only causes the control signals to be sent to the camera. It does not indicate that the actual camera's power status is displayed.
CamCTL2	Mode [F2]	This is used to select the type of camera control to be exercised by the AV-HS410's positioners. PanTilt: Panning is controlled by operating the positioner to the left or right. Conversely, tilting is controlled by operating the positioner up or down. Zoom/Focus: Lens focusing is controlled by operating the positioner to the left or right. Conversely, lens zooming is controlled by operating the positioner up or down.
	PTSpeed [F3]	This is used to select the speed at which the camera pans or tilts or at which the lens is focused or zoomed. Fast: The operations are performed at the fastest speed. Middle: The operations are performed at the intermediate speed. Slow: The operations are performed at the slowest speed.
	AF [F4]	This is used to select the type of control to be exercised over the focusing of the connected camera. Manual: The focus is controlled manually. Auto: The focus is controlled automatically.
	IRIS [F5]	This is used to select the type of control to be exercised over the iris of the connected camera. Manual: The iris is controlled manually. Auto: The iris is controlled automatically.

Sub-menu	Item/ rotary encoder operated	Function
CamCTL3	MEM Preset [F2]	This selects the memory in which the preset information of the camera is registered. None: Nothing selected MEM1: Use the memory registered in the [PLUGIN MEM1] button. MEM2: Use the memory registered in the [PLUGIN MEM2] button.

- When the button for the memory previously selected in the MEM Preset item of the CamCTL3 submenu is pressed and its button is set to ON (lighted), the preset information of the commercial camera can be registered, played back or deleted.

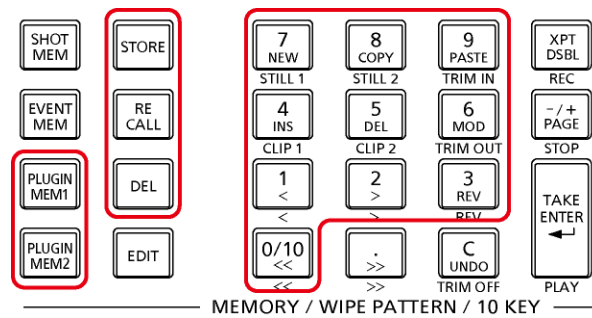

Press a number key (1 to 10) after pressing the [STORE] button.	The preset information is registered in the number of the corresponding number key. Hold down the number key.
Press a number key (1 to 10) after pressing the [RECALL] button.	The preset information of the number corresponding to the number key is played back.
Press a number key (1 to 10) after pressing the [DEL] button.	The preset information of the number corresponding to the number key is deleted. Hold down the number key.

- Up to 10 sets of preset information can be registered.
- The registered preset information is held in the camera. The numbers of the number keys are used as the preset numbers by the camera.
- The same preset memory can be selected in the CAM_IP software.
When the same preset memory is selected for both programs, it will function in the one selected last.

Note:

When the power of the AV-HS410 is turned off, the PTSpeed, AF and IRIS settings are restored to their defaults. After turning on the unit's power, these items need to be set again.

3. P2 Remote

This application makes it possible to control the recording, playback and other operations from the AV-HS410 once a Panasonic P2 device has been connected with a serial interface (RS-422).

3.1. Communication port

Connect the P2 unit to the Com connector on the rear panel of the AV-HS410 using an RS-422 straight cable.

Select Config menu → COM-Port sub-menu → Mode item and set “2” for the item.

3.2. Verified models

- AJ-HPM200
- AG-HPD24

3.3. Functions

Select the sub-menu concerned from the Plug-in menu and press [F2] (Open Menu) to display the menu of the Plug-in concerned.



Sub-menu	Item/ rotary encoder operated	Type of control over P2 unit
Control1	Play [F2]	Start playback
	Rec [F3]	Start video recording
	Stop [F4]	Stop video recording, stop playback
	Rec Pause [F5]	Pause video recording
Control2	Forward [F2]	Fast forward
	Rewind [F3]	Fast rewind

4. GVG Protocol

This application makes it possible to have the crosspoint switching, AUTO transitions and other operations controlled once a remote control panel (VS-R45 made by Venetex) or editor (that supports the GVG100 communication protocol) has been connected with a serial interface (RS-422).

The GVG100 communication protocol is supported.

- There are no parameters on the sub-menus.

4.1. Communication port

Connect the remote control panel or editor to the Editor connector on the rear panel of the AV-HS410 using an RS-422 straight cable.

4.2. Verified models

- AG-A850
- VS-R45 (serial)

4.3. Functions

Select the sub-menu concerned from the Plug-in menu and press [F2] (Open Menu) to display the menu of the Plug-in concerned.

MENU : GVG Protocol

The AV-HS410 is subject to the following types of control from the remote control panel or editor.

<Details of control>

Bus switching	The bus materials are selected from the following. <ul style="list-style-type: none"> • A/B • Key fill/key source • DSK fill/DSK source • PinP1, PinP2 • AUX1 to AUX4
Button trigger (Pushbutton control)	The same operations are performed as when the following buttons have been pressed on the control panel of the AV-HS410. <ul style="list-style-type: none"> • Auto button • DSK button • WIPE button • MIX button • PinP1 button • Pinp2 button • Key button

Forced button ON (Pushbutton lamp On control)	The following functions are forcibly set to the "On" status. <ul style="list-style-type: none">•DSK•FTB•Key•PinP1•PinP2
Forced button OFF	The following functions are forcibly set to the "Off" status. <ul style="list-style-type: none">•DSK•FTB•Key•PinP1•PinP2
Pattern switching	The BKGD and KEY transition patterns are changed.
Transition time change	The following transition times are changed. <ul style="list-style-type: none">•BKGD•Key•DSK•PinP1•PinP2

5. AUXP_IP

This application makes it possible to have the crosspoint switching, AUTO transitions and other operations controlled once a remote control panel (VS-R45 made by Venetex) has been connected with a network.

- There are no parameters on the sub-menus.
- If the AUXP_IP software version is V2.00 or later, it will run on an AV-HS410 model whose system software version is V2.00.00 or later.
Conversely, if the AUX_IP software version is earlier than V2.00, it will run on an AV-HS410 model whose system software version is earlier than V2.00.00.

5.1. Communication port

Connect the VS-R45 to the LAN connector on the rear panel of the AV-HS410 using a LAN cable. (Up to four VS-R45 units can be connected.)

Use a crossover cable when connecting the AV-HS410 and VS-R45 on a 1:1 basis.

5.2. Functions

Select the sub-menu concerned from the Plug-in menu and press [F2] (Open Menu) to display the menu of the Plug-in concerned.



```
MENU : VS-R45(IP)
```

The AV-HS410 is subject to control exercised from the VS-R45(IP).
For further details, refer to the operating instructions of the VS-R45.

Notes:

- The settings of the AV-HS410 and VS-R45 must be matched with the network settings.
- The AV-HS410 and VS-R45 cannot be connected using a public line.

6. HS410_IF

This application makes it possible to control the AV-HS410 from an external device. Using a dedicated command interface, bus switching, auto transitions, and other operations can be performed for the AV-HS410 from a computer that is connected via an IP network.

- There are no parameters on the sub-menus.
- If the HS410_IF software version is V2.00 or later, it will run on an AV-HS410 model whose system software version is V2.00.00 or later.

6.1. Communication Settings

The settings for communicating with the AV-HS410 are as follows.

- 10Base-T/100Base-T
- IPv4
- TCP/IP
- IP Address : Can be modified from a menu (default: 192.168.0.8)
- Subnet Mask : Can be modified from a menu (default: 255.255.255.0)
- Port number : 60040 (fixed: up to four simultaneous connections supported for external control)
- Minimum command interval : At least 1 frame

6.2. Functions

Select the sub-menu concerned from the Plug-in menu and press [F2] (Open Menu) to display the menu of the Plug-in concerned.



```
MENU : HS410_IF
```

Notes:

- The settings of the AV-HS410 and external device (PC) must be matched with the network settings.
- The AV-HS410 and external device (PC) cannot be connected using a public line.